

ELECTRONICS

AUSTRALIA

JANUARY 1983

Registered by Australia Post — publication No. NBP0240.

AUST \$2.00*
NZ \$2.50


SCANNERS & SCANNING



NEW CRAZE BUT IS IT LEGAL?

TV ADVERT
SOUND KILLER
BATTERY SAVER
FOR PERSONAL
PORTABLES

TEAC AM/FM TUNER REVIEWED

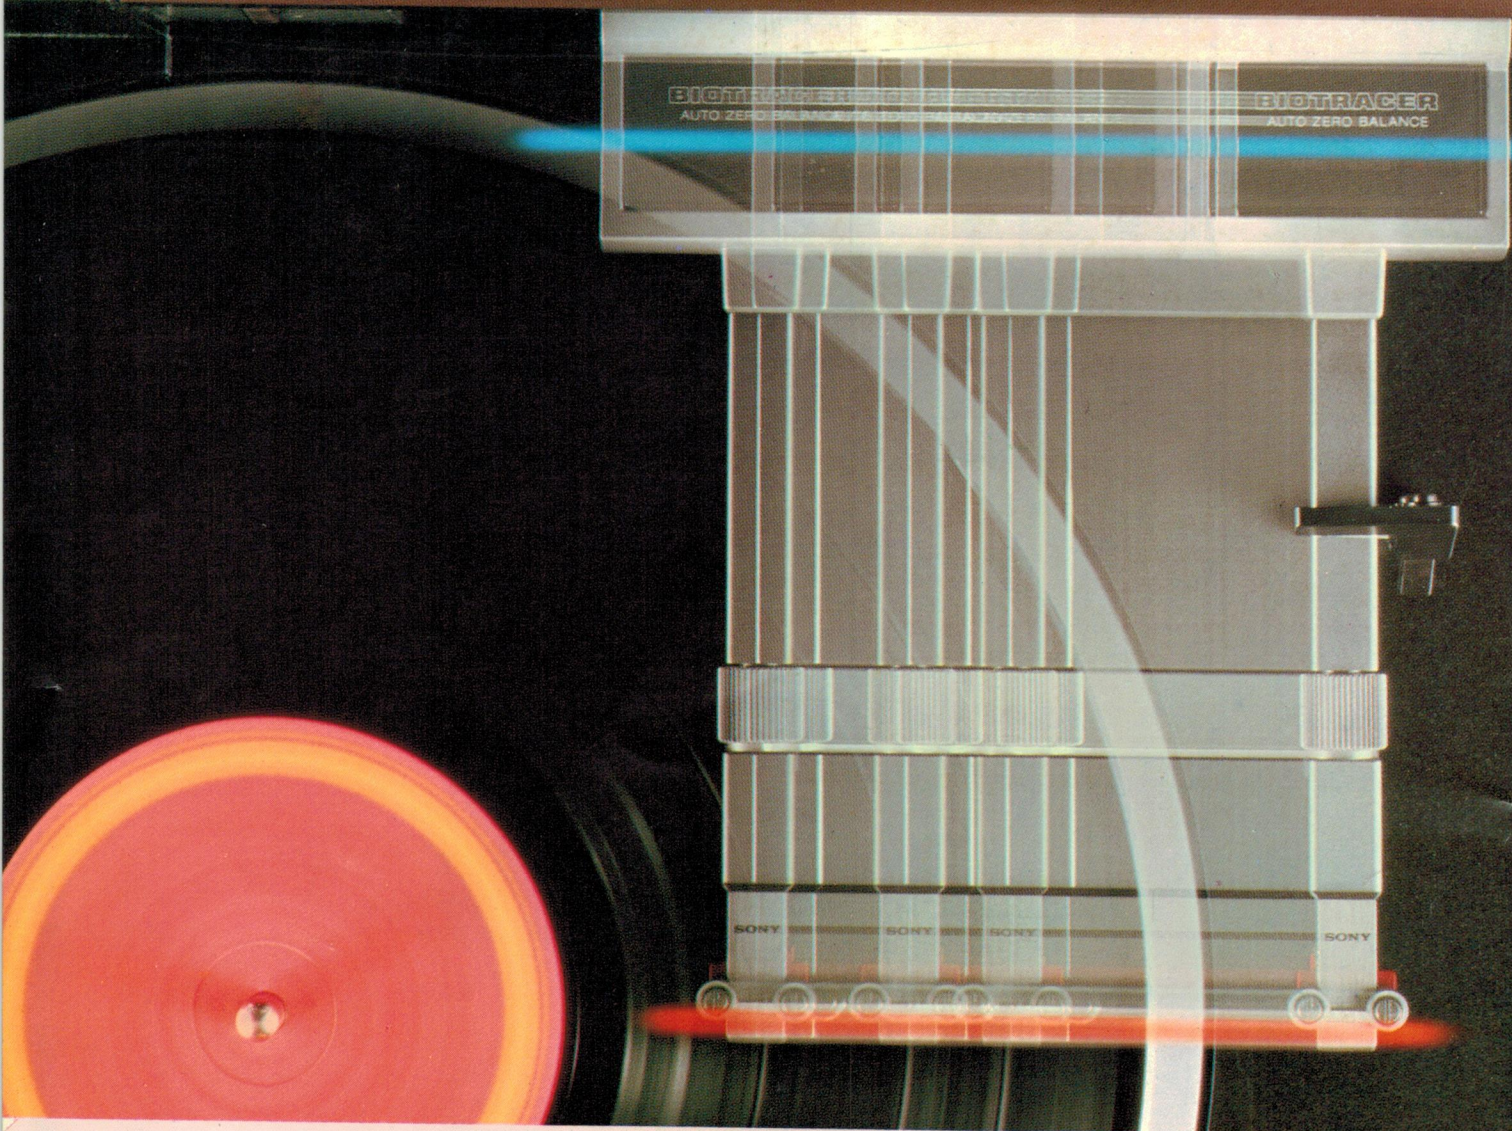

Off on a tangent with Sony.

We didn't jump into tangential tracking turntables right off the bat. And Sony hopes you didn't either. Because while most lateral tonearms don't exactly shift gears as they travel down their path, they do run into some rough spots. A hang-up called "cogging" that inhibits totally free flowing movement, and hampers left and right stereo separation.

Sony has alleviated cogging and out of phase problems with an invention called Tangential Tracking Biotracer.

Controlled by two microcomputers and four sensors, the motion of the Biotracer tonearm is continuously fluid for precise phase alignment of the stylus.

To the average person these differences may sound slight. But if your standards are as high as Sony's, you'll understand the angle we're driving at.

PS-X800



SONY
THE ONE AND ONLY

SON 0116

ELECTRONICS

AUSTRALIA


Volume 45, No. 1
January, 1983

AUSTRALIA'S LARGEST SELLING ELECTRONICS MAGAZINE

Remote control for TV sound



Kill those pesky TV commercials with this infrared TV sound control. It features eight steps of control, including full off, and can be built for around \$40. Details p40.



This new plugpack regulator lets you power personal audio equipment from the mains. We tell you how to build it on p52.

On the cover

Eavesdropping on the bands using scanners may be the latest craze, but are scanners legal? Our feature article on page 16 has all the details. (Cover artwork produced by Mike Middleton and Sue Balson, and supplied by Dick Smith Electronics).

FEATURES

THE WORK OF THE SHIP'S RADIO OFFICER <i>Electronics at sea</i>	10
SCANNERS AND SCANNING <i>New craze but is it legal?</i>	16
EXPEDITION TO THE ANTARCTIC: PT 2 <i>Modern day adventure</i>	22
50 & 25 YEARS AGO <i>Radio pirates, canine cosmonaut</i>	121
COMING NEXT MONTH <i>Exciting new projects</i>	132

HIFI, VIDEO AND REVIEWS

LASER TESTS FOR LOUDSPEAKERS <i>Doing away with the guesswork</i>	30
HIFI REVIEW <i>Teac Synthesised AM/FM Tuner with 12-station memory</i>	38

PROJECTS AND CIRCUITS

REMOTE INFRARED TV SOUND CONTROL <i>Kill those pesky commercials</i>	40
BATTERY SAVER FOR PERSONAL PORTABLES <i>Eliminates hum problems</i>	52
A HIGH PERFORMANCE AM TUNER: PT 2 <i>Full construction details</i>	58
THE "LED HEAD" LIGHTCHASER <i>Be the light of the party</i>	72
CIRCUIT AND DESIGN IDEAS <i>Triangle-to-sine-wave converter, etc</i>	78

PERSONAL COMPUTERS


CHUNKY GRAPHICS FOR THE SUPER-80 <i>Plus inverse video characters</i>	80
DATUM MICROPROCESSOR TRAINER <i>Games and software design</i>	86
MICROCOMPUTER NEWS <i>Portable computer from Hewlett-Packard</i>	123

COLUMNS

FORUM <i>Where there's smoke there's a TV set — perhaps!</i>	26
THE SERVICEMAN <i>A tale of two Sanyos</i>	68
SHORTWAVE SCENE <i>Bonaire — tiny island with a big voice</i>	112
RECORD REVIEWS <i>Classical, popular & special interest</i>	125

DEPARTMENTS


EDITORIAL	3	NEW PRODUCTS	104
NEWS HIGHLIGHTS	7	INFORMATION CENTRE	131
LETTERS TO THE EDITOR	96	MARKETPLACE	134
BOOKS AND LITERATURE	100	NOTES AND ERRATA	133

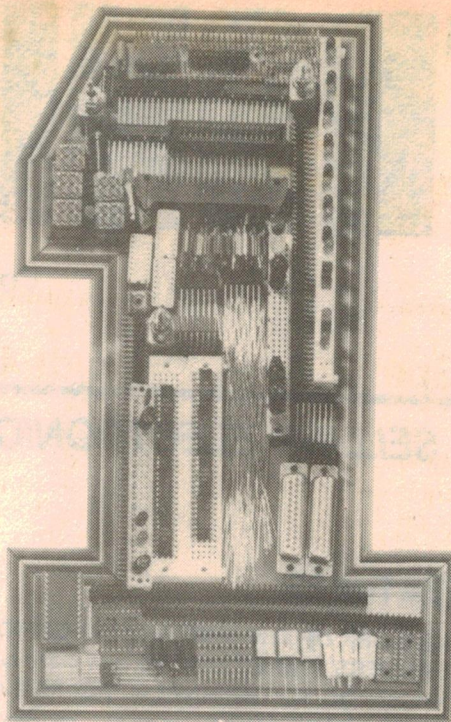

No.1 for any bits.

In the electronic component field today, being No. 1 is tough. At the new Ampec Trade Shop, we already have a No. 1 address . . . and No. 1 service and prices . . . and always the


No. 1 products. Quite simply, we want to be No. 1 with you. Here are some of our current specials available while stocks last — prices do not include sales tax.

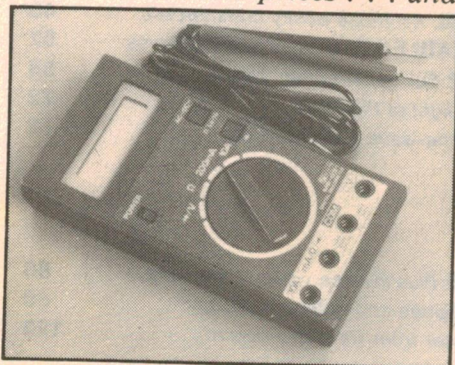

Digital Multimeter


3½ digit LCD multimeter with 10 amp range. ME 531 — \$45.00

These prices while stocks last — sales tax not included.

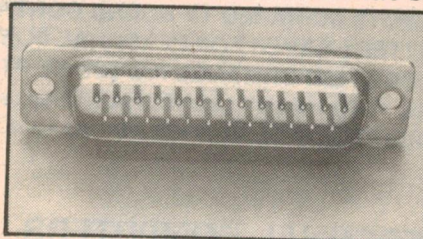

D Connectors

ADIN — 1S — 25P	\$1.91
ADIN — 1S — 25	\$2.82
ADIN — 1S — 9S	\$2.49
ADIN — 1 — 9P	\$1.89
ADIN — 15S	\$3.51
ADIN — 15P	\$2.52

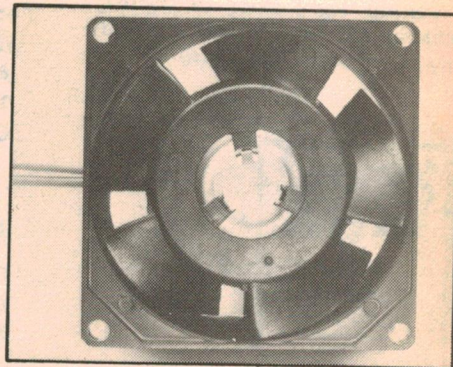

Fans


4" fan — 240V EP114-38	\$11.00
3" fan — 240V EP 75-38	\$11.00


The Ampec Trade Shop

No. 1 Wellington Street, Rozelle, NSW 2039

Phone: 818 1166

AMPEC
The absolute in peripheral thinking.

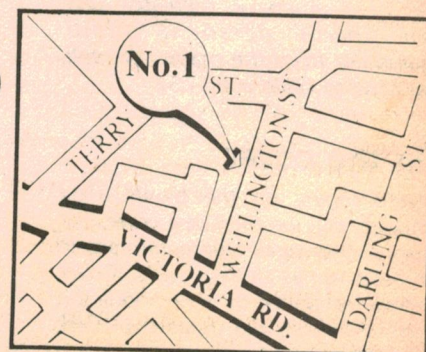



Editorial Viewpoint

Spend defence funds in Australia

EDITOR-IN-CHIEF

Neville Williams
F.I.R.E.E. (Aust.) (VK2XV)

EDITOR

Leo Simpson
B. Bus. (NSWIT)

ASSISTANT EDITOR

Greg Swain, B.Sc. (Hons. Sydney)

TECHNICAL PROJECTS

John Clarke, B.E. (Elect. NSWIT)
Peter Vernon, B.A. L.L.B. (NSW)
Jeff Skeen
Colin Dawson

PRODUCTION

Danny Hooper

GRAPHICS

Robert Flynn

SECRETARIAL

Pam Hilliar

ADVERTISING MANAGER

Selwyn Sayers

CIRCULATION MANAGER

Alan Parker

As many readers will be aware, Australia has had two destroyers fitted with the American Phalanx anti-missile weapon. This is essentially a radar and computer-controlled Gatling gun which fires "penetrators" at the rate of 3000 per minute. The hope is that the hail of "bullets" will destroy the missile before it destroys its target.

While some people may regard Phalanx as the ultimate expression of the futility of war, in the wake of the Falklands, it does seem as though a weapon like Phalanx is a necessity if maritime forces are to be effective. So Australia has decided to buy Phalanx and, as part of the deal, Australia will make the ammunition.

The question I would like readers to consider is this: If Australia's defence department considers that we should make the ammunition, why can't we make the whole weapons system? Superficially, at least, there is little in the Phalanx system which could not be duplicated or at least adapted to local manufacturing capability. For example, instead of using depleted uranium in the penetrators (for maximum mass) Australia will use a special jacketed penetrator.

Certainly, some components for an Australian version of the Phalanx would probably have to be imported but that should not be a barrier. And having asked the question about an anti-missile system, why cannot Australia make other high-technology items?

If the government had a policy that a major part of defence needs must be satisfied by local sources, a number of very worthwhile benefits would be produced. First, research and development into many areas of technology would greatly increase. One has only to look at the R&D in America and Europe to realise that much of it is defence based or related. Secondly, the number of skilled engineers and technicians would also increase.

As our manufacturing skills increased there would be a consequent improvement in employment. In other words, instead of regarding the defence budget as mostly money down the drain, even though it is absolutely necessary, we could obtain much greater benefits from this large amount of spending by spending more of it locally rather than overseas.

There would also be a strategic benefit in that we would be less reliant on overseas suppliers. And in the international sphere, Australia would become less dependent on America as an ally in times of threat. We could "stand on our own two feet". And who knows, we might even start to sell defence equipment to other countries.

Leo Simpson

Editorial and Advertising Office

57 Regent St, Chippendale 2008.
Phone (02) 699 3622 Telex 25027.
Postal Address: PO Box 163, Chippendale, 2008.
Advertising Sales Manager: Sel Sayers.

Melbourne — 392 Little Collins St, Melbourne 3000. Phone (03) 602 3033.
Representative: Mark Christian.

Adelaide — Charles F. Brown & Associates Ltd, 278 Halifax St, Adelaide, 5000.
Representative: Sandy Shaw (08) 267 4433.

Perth — 454 Murray Street, Perth 6000.
Representative: Ashley Croft (09) 321 8217.

Circulation Office

Unit 3B, Sydneygate, Waterloo, 2018.
Phone (02) 699 2388.

Subscriptions

Subscription Dept, John Fairfax & Sons Ltd,
GPO Box 506, Sydney 2001.
Enquiries: Phone (02) 20944, ext 2589.

Distribution

Distributed in NSW by Magazine Promotions, 57 Regent St, Chippendale; in Victoria by Magazine Promotions, 392 Little Collins Street, Melbourne; in South Australia by Magazine Promotions, 101-105 Waymouth St, Adelaide; in Western Australia by Magazine Promotions, 454 Murray Street, Perth; in Queensland by Gordon and Gotch (A'asia) Ltd; in Tasmania by Ingle Distributors, 93 Macquarie St, Hobart; in New Zealand by Gordon and Gotch (NZ) Ltd, Adelaide Rd, Wellington.

Registered by Australia Post — publication No. NBP0240.

Copyright. All rights reserved.

Devices or arrangements shown in this magazine may embody patents. Information is furnished without responsibility for its ultimate use, or for failure of equipment to operate as expected, or for any damage, loss or injury which may be sustained. Material intended for publication is submitted at the sender's risk and, while care will be taken, responsibility for any possible loss will not be accepted by "Electronics Australia".

Printed by Magazine Printers Pty Ltd, of Regent Street, Chippendale and Masterprint Pty Ltd of Dubbo NSW for Magazine Promotions, of Regent St, Chippendale.

ISSN 0313-0150

* Recommended and maximum price only.

**"OUR AIM:
TO KEEP
ELECTRONICS
PRICES
DOWN IN '83"**

Dick Smith

SAVE

**ON QUALITY
DICK SMITH TAPE**

Top quality cassette tapes at a low economical price. They're as good as imported cassettes you'd pay \$\$\$ more for!


C60 Low Noise Cat C-3350	C90 Low Noise Cat C-3352	C90 EDR Cat C-3354
WAS \$1.50 pay only	WAS \$2.00 pay only	WAS \$2.75 pay only
\$1.00 ea.	\$1.20 ea.	\$1.90 ea.

THIS
MONTH ONLY!

THAT'S UP TO 40% OFF!

**PROJECT BUILDERS SAVE
ON PRO FINISH
PLASTIC CASES**

**INSTRUMENT CASE
WITH HANDLE**



Top quality design for larger projects. Size 200x200x100mm. Cat H-2500

WAS \$21 **NOW \$17.50**

**SUPERB
PROJECT CASE**



For all 'instrument' type projects. Split apart design. Size 200x160x65mm. Cat H-2505

WAS \$19.95 **NOW ONLY \$9.95**

NEW QUALITY CASE

Stylish new case for smaller projects. Split apart design. Size 130x125x38mm. Cat H-2506

ONLY \$12.50

THIS MONTH ONLY!

**The Affordable
DFM**



**600MHz 7 Digit
Frequency Meter**

No hobbyist can afford to be without this incredibly accurate piece of test equipment. Fits easily into the palm of your hand. Variable gating times and 3 ranges-6MHz, 60MHz and 600MHz. Battery operated...take it anywhere! Cat D-3000

WAS \$205 **NOW ONLY \$199**
Why Pay More?

**LISTEN TO
AIRCRAFT**



**AIR BAND
(VHF) AND
AM RADIO**

Listen to pilots and air traffic controllers. Has normal AM band too. Battery operated. Cat D-2836

ONLY
\$29.50

YOU'LL HEAR
CHOPPERS
TOO!



**STOCK CLEARANCE
SAVE 25%**

NYLON NUTS & BOLTS

Precision white nylon. Fully insulated and heat resistant.

Description	Qty.	Cat.	PACK	WAS	NOW ONLY
12mm x 4BA cheese head	10	H-1012	95c	70c	
25mm x 4BA cheese head	10	H-1022	95c	70c	
4BA hex nut	12	H-1302	\$1.95	\$1.45	
4BA washer	12	H-1452	95c	70c	
12mm x 6BA cheese head	10	H-1032	95c	70c	
25mm x 6BA cheese head	10	H-1042	80c	60c	
6BA hex nut	10	H-1312	\$1.95	\$1.45	
6BA washer	10	H-1462	95c	70c	

STEEL NUTS & BOLTS

1/8" round head zinc plated.

Pack	No.	WAS	NOW ONLY
9mm long	25	H-1052	75c 55c
12mm long	25	H-1062	75c 55c
25mm long	20	H-1072	75c 55c
3mm hex nut	30	H-1322	90c 70c
3mm shake proof washer	50	H-1472	80c 60c
3mm metal washer	50	H-1482	80c 60c

SELF TAPPING SCREWS

Cadmium plated steel. Ideal for projects.

No. 4 x 12mm: Size 40	25	H-1612	80c 60c
No. 4 x 6mm: Size 40	25	H-1611	80c 60c
No. 8 x 12mm: Size 30	25	H-1632	95c 70c

THIS MONTH ONLY!

**\$100
OFF!**



Cat X-2000

**AUSTRALIA'S
MOST POPULAR
COLOUR COMPUTER-
THE VIC 20**

Sensational price cut on the amazing VIC 20 colour computer. Buy NOW and save a massive \$100...yes 25% off!!! Australia's best value colour computer with superb graphics display in up to 8 colours.

**WAS INCREDIBLE
VALUE AT**

\$399

NOW ONLY

\$299



GREAT VIC 20 MANUALS

PROGRAMMERS REFERENCE GUIDE

Reference manual on VIC BASIC, Programming and much more. Cat B-2004

ONLY \$25

LEARN COMPUTER PROGRAMMING

How to write, develop & test Basic programs on the VIC. Cat B-2005

ONLY \$8.95

VIC REVEALED

How and why VIC works and how to write better programs. Cat B-2006

ONLY \$17.50

INNOVATIVE COMPUTING


Program your own exciting arcade games as well as many new ones. Cat B-2007

ONLY \$17.50

YOU JUST BOUGHT A PERSONAL WHAT?

Microsoft and Level II basic creative programs. Cat B-2331

WAS \$15.95 **NOW \$12.95**

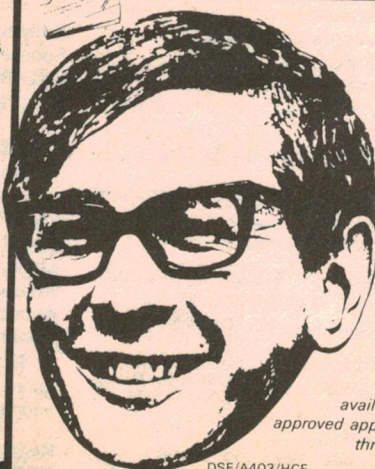

Terms
available to
approved applicants
through...



DSE/A403/HCE

\$50,000 IN PRIZES TO BE WON IN THE MIGHTY MATCH-UP COMPETITION. SEE YOUR NEAREST DICK SMITH STORE.

**COOP BUY
SPEAKERS**

**AMAZING
VALUE**

A Big sound with a small price
Flush mounted with black cover
5ins, 5watt, 5ohms
Cat. A-6986

\$4.95 each

BIG SAVINGS ON DICK'S ZIPPIES




THIS MONTH ONLY

The original and the best. The ONLY one with all round ribbing. Don't be fooled by inferior copies. Quick easy all purpose Zippy Box for all projects. Strong and simple PCB's mount without screws.

- | | |
|--|--|
| SAVE 25c
Small UB5 \$1.50
(28x54x83mm)
Cat. H-2755 | SAVE 45c
Large UB1 \$2.30
(50x90x150mm)
Cat. H-2751 |
| SAVE 35c
Medium UB3 \$1.85
(41x68x130mm)
Cat. H-2753 | SAVE 45c
Giant UB2 \$3.30
(60x113x196mm)
Cat. H-2752 |

EXPERIMENTERS LOOK AT THIS PROTO BOARD



Designing your own circuits? then Proto board is a must.

- No soldering
 - No desoldering
 - No heat damaged components
 - No wasted time
- Accepts IC's, LSI's, resistors, capacitors, LED's, transistors, relays, etc.
Box board with two clip on extensions, 390 holes in all and you can add more for even bigger projects - Cat P-4614

**SAVE \$2.00
\$7.20**

**AMAZING
QUALITY**



**STOCK UP NOW
SPECIAL PRICE THIS
MONTH ONLY**

MOVING IRON METERS



Rugged and accurate AC/DC meter, ideal for power supplies
Size approx. 55mm wide 58mm high
0-20V (AC/DC) Cat. Q-2080
0-10A (AC/DC) Cat. Q-2090

SAVE \$1.00 \$6.95

LEVEL METER

Elegant styling with straw coloured face, looks superb when back lit.




Signal Strength Meter
250uA FSD scale 1-10 Cat. Q-2100
Center Zero (tuning)
sensitivity is 250uA half FSD
(in either direction) **SAVE \$1.00**
Cat. Q-2095

\$4.95

EDGE LEVEL METER

Scale calibrated from 1-10 with battery check strip. Ideal for a fine level adjustment meter, audio or battery.
scale size 32 x 10mm



**SAVE \$1.00
\$4.95**

Cat. Q-2110

**SAVE \$56
THIS MONTH ONLY**


Model V-152B

HITACHI CRO QUALITY AT A LOW LOW PRICE

This is a top of the line CRO but with a very low price. Why pay more elsewhere and do no better?

**WAS \$655.00
NOW \$599.00**

**DETAILED TECHNICAL
BROCHURE AVAILABLE -
JUST ASK!**



SPECIFICATIONS

Vertical Sensitivity: 5mV/div-5V/div
Bandwidth: DC - 15MHz, -3dB
Rise Time: 24ns
Non-dist. max amplitude: More than 4 div. @ 15MHz
Input R and C: Direct 1M ohm, approx. 30pF
Maximum input voltage: 600V P-P (300V AC + DC peak)
Display Modes: CH1, CH2, DUAL, ADD, DIFF
Sweep Time: 0.2us-0.2s/div. 19 calibrated steps
Internal Trigger Sensitivity: 20Hz-2MHz 0.5 div 2-15MHz 1.5 div
External Trigger Sensitivity: 20Hz-2MHz 800mV 2-15MHz 800mV
Power Requirements: 120-240V, 40W
Dimensions: 275(w) x 190(h) x 400(d)mm
Weight: approx. 8kg Cat. Q-1242

SAVE PANEL METER SALE

Accurate high quality meter easy to read with zero adjustment and secure four bolt mounting. Ideal for all projects.

**SAVE \$1.00
\$7.95**

- | | | |
|-------------------------------|-------------------------------------|----------------------|
| 0-50uA (2400 ohms) Cat Q-2020 | 0-20V (100 ohms) Cat Q-2040 | Dimensions: |
| 0-5A Cat. Q-2030 | -20 - +3 VU (1000 ohms) | Scale area - 58x31mm |
| | (0dB 1mW into 600 ohms) Cat. Q-2050 | Overall - 58x52mm |

LARGE PANEL METER \$11.95

Large style easy reading
0-100uA (1100ohms) cat. Q-2070
0-1 mA (1200 ohms) cat. Q-2060
Scale size 100 x 50mm Size 100 x 82mm

SAVE \$1.00

TERMINAL STRIP



**SAVE 31c
99c**

Cat. H-6700

This ever popular "chocolate" block in nylon can be used from one to twelve way terminal. Mains use 240V AC Rating

MAKE YOUR IN IC SOCKETS

MOLEX PINS

The do-it-yourself IC socket! Ideal for all types of IC's - supplied in strips; you simply solder required number of pins in place, insert IC and break off carrier strip! Even suits round IC's! Pack of 100 pins.
t. P-4504

\$2.25

FREE WAY /VIDEO/GAME MPUTER SWITCH LUN



Cat. L-4500

neat switch with antenna and inputs
ohms and 75 ohms (antenna inputs)
ut to TV
shielded in strong box

**VALUE
\$3.95**

**ACROSS
THE BOARD
PRICE CUTS
YOU REAP THE
BENEFIT**



BIG KNOB SALE SAVE ON IMPERIAL KNOBS

These knobs fit standard 1/4 in. shafts ideal for replacing those worn or missing ones

- | | |
|--|---|
| Very large plastic knob
Size 40mm dia x 16mm
Cat. H-3760
85c .75c | Large flute with silver insert
24mm dia x 14mm
Cat. H-3772
75c .65c |
| Calibrated wide skirt
37mm dia x 16mm
Cat. H-3770
\$1.00 .90c | Small knob with small skirt
19mm dia x 13mm
Cat. H-3762
60c .55c |
| Positive grip and wide skirt
32mm dia x 16mm
Cat. H-3766
.65c .55c | Heavily fluted, small skirt
24mm dia x 15mm
Cat. H-3768
.55c .45c |

YOU REAP THE BENEFIT

DICK SMITH ELECTRONICS

33 STORES THROUGHOUT AUSTRALASIA

V Parramatta Rd & Melton St
T55 Terrace Level
613 Princes Hwy
Oxford & Adelaide Sts
818 George St
531 Pittwater Rd
147 Hume Hwy
162 Pacific Hwy
Elizabeth Dr & Bathurst St
Lane Cove & Waterloo Rds
George & Smith Sts
6 Bridge St
125 York St
Tamworth Arc & Kable Ave
173 Maitland Rd
263 Keira St
96 Gladstone St

AUBURN
BANKST SQ
BLAKEHURST
BONDI JCT
BROADWAY
BROOKVALE
CHULLORA
GORE HILL
LIVERPOOL
NORTH RYDE
PARRAMATTA
SYDNEY
SYDNEY
TAMWORTH
TIGHE HILL
WOLLONGONG
FYSHWICK

648 0558 VIC
707 4888
546 7744
387 1444
211 3777
93 0441
642 8922 QLD
439 5311
600 9888
888 3200 SA
689 2188
27 5051
290 3377 WA
66 1961
61 1896
28 3800 TAS
80 4944

260 Sydney Rd
Nepean Hwy & Ross Smith Ave
205 Melbourne Rd
399 Lonsdale St
Bridge Rd & The Boulevard
Springvale & Dandenong Rds
293 Adelaide St
166 Logan Rd
Gympie & Hamilton Rds
Wright & Market Sts
Main South & Flagstaff Rds
Main North Rd & Darling St
Wharf St & Albany Hwy
William St & Robinson Ave
Centerway Arcade, Hay St
25 Barrack St

COBURG
FRANKSTON
GEELONG
MELBOURNE
RICHMOND
SPRINGVALE
BRISBANE
BURANDA
CHERMSIDE
ADELAIDE
DARLINGTON
ENFIELD
CANNINGTON
PERTH
PERTH
HOBART

383 4455
783 9144
78 6766
67 9834
428 1614
547 0522
229 9377
391 6233
59 6255
212 1962
298 8977
260 6088
451 8666
328 6944
321 4357
31 0800


SEE
OVER PAGE
FOR MAIL
ORDERS,
SPEEDY
BANKCARD
SERVICE &
ADDRESSES
OF MAJOR
RESELLERS

DES/A403/RW

The affordable CRO!

OVER 2000 SOLD!

DICK SMITH 6.5MHz 75mm LABORATORY CRO



This oscilloscope is ideal for the laboratory, the classroom, in field service, in bench service in assembly centres and, of course, in hobby applications. Solid state electronics (apart from the tube!) ensures extremely low drift and fast warm-up.

Features: Retrace blanking: gives a much clearer display; Lower threshold triggering: less than 1/2 division at 5MHz; Sharper focus — especially at high frequencies; Fibreglass PCB; Colour coded input terminals; AND A USEABLE RESPONSE TO BEYOND 6.5MHz!

STILL ONLY \$199

FIND OUT MORE ABOUT ELECTRONICS THE FUN WAY!

Fun Way Vol. 1

4th printing of this amazing book. 72 pages packed with exciting projects, all safe as they are battery operated. AND all projects are virtually impossible. Cat B-2600

ONLY \$4.95

Fun Way Vol. 2

After mastering Funway Vol. 1 why not go further? Learn about PCB's and soldering. 130 pages packed with more projects. Cat B-2605

ONLY \$6.95

TRANSISTOR SPECIALS

POWER TRANSISTOR BARGAINS

Quality power transistors at bargain prices: buy now for the junk box — you'll never know when you might need one!

TYPE	DESCRIPTION	Cat No	WAS	NOW
MJ2955	115W 60V PNP Output	Z-1800	\$1.50	\$1.25
MJ3055	115W 60V NPN Output	Z-1804	\$1.50	\$1.25
MJ15003	250W 120V NPN Output	Z-1808	\$5.20	\$4.20
MJ15004	250W 120V PNP Output	Z-1810	\$5.20	\$4.20
2SK133	50W 40V Power Mosfet	Z-1815	\$7.90	\$3.95
2SJ48	50W 40V Power Mosfet	Z-1816	\$7.90	\$3.95

SAVE \$8.50!



This popular power supply features a continuously variable voltage range from 5V to 15V DC. The current ratings are 2 amps continuous, 3 amps short term or 4 amps peak pulse. Fuse protection and current limit protection are also featured. Ideal for work bench situation. Cat M-9546

DICK SMITH VARIABLE POWER SUPPLY

\$67.50

NOW \$59

FLASHING LEDS — WHY PAY MORE?

How do we do it? Quality flashing LEDS, normally 45c now an amazing 15c each! They won't last at this price! Cat Z-4000

15c ea

SAVE \$4.50

QUALITY AUTO RANGING DIGITAL MULTIMETER

Portable, 3 1/2 digit, compact sized tester ideally suited for field, lab, shop bench and home application. Features include Overload Protection; Battery Operated (2 AA sized 1.5V). Cat Q-1446

\$49.50 GREAT VALUE!

\$45

\$2.25 PC RESIST PEN

Essential for precision marking of boards prior to etching. Unique press-to-mark feature ensures adequate dye when marking the board. Cat T-5170

\$1.75

PCB MARKING KIT

Contains two colour pens for easy identification of circuits and an eraser. The pens are for direct use on PC board copper foil. Cat T-5175

\$4.25

YOU REAP THE BENEFIT!

SAVE WITH HIWATT BATTERIES



Quality Hi-Watt batteries, low Dick Smith price!

	each 10up
Cat S-3001 D size metal jacket	35c 30c
Cat S-3002 D size metal jacket	30c 25c
Cat S-3003 AA penlight	25c 22c
Cat S-3004 AAA size	30c 25c
Cat S-3005 UM 5 (R 11)	20c 15c
Cat S-3006 216 9V transistor	50c 45c

'CHARGE' in for these battery bargains!

SAVE ON QUALITY NI-CADS

Don't throw these away — they recharge time and time again!

	WAS	NOW	STOCK UP NOW!
Cat S-3300 1.2V Ni-cad Pencil	\$2.45	\$2.20	
Cat S-3302 'C' size cells (pk 2)	\$12.40	\$11.80	
Cat S-3304 'D' size cells (pk 2)	\$13.20	\$12.50	
Cat S-3306 7.2V (size 216)	\$11.00	\$10.25	

NI-CAD CHARGING CARTRIDGE

Cat M-9519

Charges virtually any size rechargeable battery. Includes test meter and 5 separate LED indicators to show the strength of batteries being charged.

To suit the above batteries

\$19.95

CHEAP RECORD CARE

Plush velvet pad with special groove cleaning fluid to keep your records sparkling clean, plus soft stylus brush to remove dust. Cat C-7092

\$3.50 \$4.50

HOOK A BARGAIN!

Miyama Hook Probe Syringe action probe for easy connection to tight corners. Knurled grip screw for instant lead attachment. Cat W-4589

\$2.50 EA



RELAY SPECIALS

Ultra miniature PC mounting 320 ohm 5V coil. SPDT. Ideal for TTL interface. Cat S-7105 \$2.95

Ultra miniature PC mounting 320 ohm 12V coil. SPDT contacts with 0.5A rating. Cat S-7112 \$2.95

Robust heavy duty PC mounting. 200 ohm 12V coil. DPDT contacts with massive 5A rating. Cat S-7130 \$5.50

Economy heavy duty PC mounting. 160 ohm 9-12V coil. DPDT with huge 10A rating. Cat S-7140 \$3.50

MAJOR RESSELLERS

Atherton QLD: Sue Sue's Radio Service, 55 Main St. 91 1208 • Bendigo VIC: Sumner Electronics, 7 Edward St. 43 1977 • Ballina NSW: A. Cummings & Co. 91-93 River St. 86 2285 • Cairns QLD: Thompson Instrument Services, 79-81 McLeod St. 51 2404 • Coffs Harbour NSW: Coffs Harbour Electronics, 3 Coffs Plaza, Park Ave. 52 5684 • Darwin NT: Kent Electronics, 42 Stuart Hwy. 81 4749 • Darwin NT: Ventronics, 24-26 Kavanagh St. • Deniliquin NSW: Deni Electronics, 220 Cressy St. 81 3672 • East Maitland NSW: East Maitland Electronics, cnr Laws & High Sts. 33 7327 • Echuca VIC: Webster Electronics, 220 Pakenham St. • Geraldton WA: KB Electronics & Marine, 361 Main Terrace. 21 2176 • Gladstone QLD: Purely Electronics, Shop 2, cnr Herbert & Auckland Sts. 72 4321 • Gosford NSW: Tomorrow's Electronics & Hi-Fi, 68 William St. 24 7246 • Kingston TAS: Kingston Electronics, Channel Court. 29 6802 • Launceston TAS: Advanced Electronics, 5a The Quadrant. 31 7075 • Lismore NSW: Decro Electric 3a/6-18 Carrington St. • Mackay QLD: Stevens Electronics, 42 Victoria St. 51 1723 • Maryborough QLD: Keller Electronics, 218 Adelaide St. 21 4559 • Mt. Gambier SA: Hutchison's Communications, 5 Elizabeth St. 25 6404 • Mildura VIC: McWilliam Electronics, 40 Lemon Ave. 23 6410 • Morwell VIC: Morwell Electronics, 128 George St. 34 6133 • Nambour QLD: Nambour Electronics, Shop 4, Lowan House, Ann St. 41 1604 • Orange NSW: M&W Electronics, 173 Sumner St. 62 6491 • Penrith NSW: Acorn Electronics, Shop 12, 541 High St. 36 1466 • Port Macquarie NSW: Hall of Electronics, 113 Horton St. 83 7440 • Rockhampton QLD: Purely Electronics, 15 East St. 21 058 • Shepparton VIC: G.V. Electronics Centre, 189b Conio St. 21 8866 • Southport QLD: Amateurs Paradise, 121 Nerang St. 32 644 • Toowoomba QLD: Hunt's Electronics 18 Neil St. 32 9677 • Townsville QLD: Tropical TV, 49 Fulham Rd, Vincent Village. 79 1421 • Wagga NSW: Wagga Wholesale Electronics, 82 Forsyth St. • Wodonga VIC: AGM Electronics, 78a High St. 24 4588 • Whyalla SA: Mellor Enterprises, Shop 2, Forsythe St. 45 4764 • Warrambool VIC: Western Districts Recordings, 192 Fairy St. 62 6667

MAIL ORDER CENTRE: PO Box 321 North Ryde, NSW 2113
Phone: (02) 888 3200

STORES THROUGHOUT AUSTRALIA

POST & PACKING CHARGES

ORDER VALUE	CHARGE
\$5.00-\$9.99	\$1.40
\$10.00-\$24.99	\$2.40
\$25.00-\$49.99	\$3.50
\$50.00-\$99.00	\$4.60
\$100 or more	\$6.20

Charges are for goods sent by post in Australia only — not airmail, overseas or road freight.

SPEEDY PHONE/BANKCARD ORDER SERVICE

Just phone through your order and Bankcard details — it's so simple!

(02) 888 3200

STORE HOURS

All Dick Smith stores are open from 9am to 5.30pm (Sat. 9am to 12 noon)* except Queensland stores which open and close half hour earlier. Many stores are open for late night trading. Phone your nearest store for details.

*North Ryde not open Saturday.




Prices correct and stock available at press time.

DSE/A403/LM



News Highlights

Australian experimenter plugs into CBS

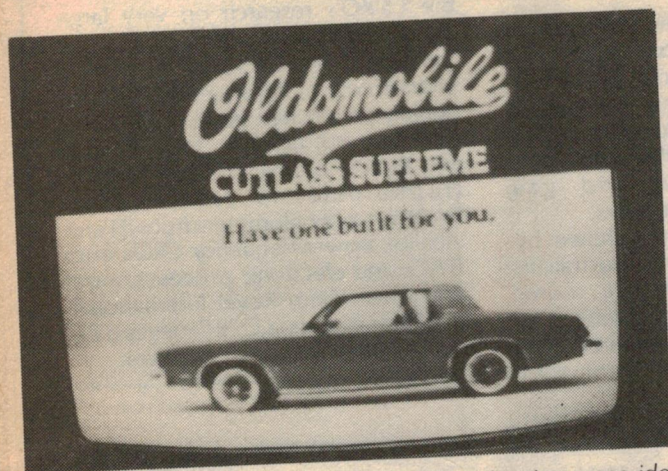

Taken from colour prints, these photographs give some idea of the excellent picture quality.

On the 20th November, 1982 a transponder on board Intelsat satellite 413, orbiting the earth at 179°E, was switched on for the first time, enabling Sydney's channel 9 television network to have full-time access to the United States' CBS network – and experimenter Victor Barker to receive the same transmissions using a private earth station.

Victor's interest in receiving satellite television transmissions dates back to the mid-seventies, when international use of satellites increased to the extent that pictures could be received on a dai-

ly basis. Some of his previous experiments were covered in an article in the November, 1981 issue of "Electronics Australia".

His system has been upgraded in the last year to take advantage of Intelsat relays of domestic ABC transmissions from Perth and Brisbane as well as the CBS transmissions and two international program interchange transponders on the original Intelsat satellite at 174°E. Plans for the next year include the construction of a five metre dish antenna and a low noise amplifier to further improve received signals.

Victor warns against purchasing domestic satellite receivers from overseas unless the user has extensive experience of FM video and microwave techniques. Domestic satellites as used in the United States, Europe and the USSR operate on different bands, use linear polarisation and radiate about ten times the power of Intelsat international satellites. Equipment from overseas will also be of little use for receiving transmissions from the domestic AUSSAT satellite when it comes into service in 1985, as the specifications are different again.

First step towards artificial muscle

The first step to an artificial muscle which would revolutionise robotics may have been taken by researchers at the Massachusetts Institute of Technology.

Researcher Toyochi Tanaka and his colleagues have reported that when an electric field is applied across a gel the gel may collapse to a volume several hundred times smaller than the original state. Such gels, controlled by low-voltage signals from microcomputers, may eventually be used as artificial muscles.

A gel – a jellylike material halfway between a solid and a liquid – consists of long-chain polymer molecules forming a tangled network and immersed in a solvent. The liquid prevents the network from collapsing, while the network stops

the liquid flowing away.

In previous research Tanaka showed that large changes in the volume of a suspended gel can be brought about by small changes in temperature, solvent composition, acidity or low voltages. All these stimuli cause the gel to change from one network arrangement to another.

Using cylindrical fibres 3cm long and 4mm in diameter, Tanaka has shown substantial changes in volume with signals of from 1 to 2V. When the electric field is removed the gel returns to its original shape in about 10 minutes.

According to Tanaka the collapse time is approximately proportional to the square of the diameter. Micron-sized gel fibres should collapse in a matter of

milliseconds. "It's very interesting that when nature made the muscle, nature made a bundle of very thin fibrils, of micron size, which make the muscle respond within 10 milliseconds," he says.

Natural muscle itself is a kind of gel in which the passage of calcium ions determines the volume. "We have a new phenomenon in which we can use electric fields to control this," says Tanaka. "We should be able to make artificial muscles in the future in which we can control the contraction and expansion by electric fields."

Next step is to extend the research to other gels. Tanaka says that "this question is very important because we showed theoretically that this is a very general phenomenon". There is already some evidence that sharp transitions can occur in other gels.

NEWS HIGHLIGHTS

Trade mission for scientific instruments

A trade mission aiming to show what Australia has to offer in advanced technology recently completed a two month visit to Europe. Organised by ASIA, (the Australia Scientific Industry Association) with backing from the Department of Trade and Resources and the Victorian Economic Development Corporation, the mission took samples of Australian-made scientific instruments to Germany and France during November and December last year.

The mission was led by Dr Clive Coogan, author of the article "High Technology and Australia" which appeared in "Electronics Australia" in December 1981. Dr Coogan is a CSIRO officer and Chairman of ASIA.

The trade mission was the first from Australia to specialise in scientific instruments, although many Australian manufacturers have achieved considerable export success in the past years.

Dr Coogan quotes the levels of export for Varian Techtron, which ships 85% of its production of optical spectrophotometers overseas. Another company, Scientific Glass Engineering, exports 95% of its production of liquid and gas chromatography components.

Among the instruments shown by the mission were the Australian-designed opto-electronic components of the "Spacelab" telescope and a display of projects derived from

Dr Clive Coogan.



the CSIRO's research on very large scale integrated circuits.

Also on display were meteorological instruments, including tipping-bucket rain gauges and solar radiation instruments, from Medos and Rimco; atomic absorption spectrophotometers from Varian Techtron; nephelometers from IEL and Analite; power-frequency CROs from BWD; and electronic process control equipment from Royel International, the latter including CSIRO-devised oxygen probes for use in furnaces.

Electric vehicles give top Games performance



FIBRE-OPTIC NEPHELOMETER



For those readers unfamiliar with the term, a nephelometer is a device used to measure the scattering of light. The device, pictured above, is made by Analite, a subsidiary of Selbys Scientific, and was recently shown in France and Germany during a recent trade mission to Europe (see story above).

Invented by Dr Clive Coogan of the CSIRO, this particular device uses a LED light source together with fibre optics to introduce the light into a liquid and to collect the back-scattered light. The result is a low-cost, continuous-reading nephelometer with a thin probe that can be poked into the liquid being measured, and which can handle turbidities 200 times beyond the range of standard nephelometers.

Although originally developed for laboratory titration measurements, the device has also found application in other areas. These include: measuring protein and fat in milk; monitoring the "setting" of cheese during cheese making; monitoring the settlement of sludge in sewage ponds; determining the density of sperm in bull semen; monitoring metal particles in automotive engine oil; checking soil in run-off water; monitoring the efficiency of the flotation process and the settlement of fines in mining; and the ability to measure the refractive index of a liquid.

ELECTRIC VEHICLES were used for the first time in an Australian marathon event during the 1982 Commonwealth Games in Brisbane and, according to the South East Queensland Electricity Board, their performance showed that they are a viable means of transport. Lucas Industries, the Australian Electric Vehicle Association, and the Australian Lead Development Association provided two electric Bedford one tonne vans for two events: the 30km road walk at Manly on 7th October, and the 42km marathon run in Brisbane on 8th October. One was used as the lead vehicle for both events and carried officials and press photographers, while the other served as a field vehicle for the marathon, picking up exhausted or injured competitors.

A time and distance electronic display board, designed and built by staff from the SEQEB, was positioned on top of the lead vehicle and provided spectators with an instant update on the distance travelled and the time of the leading runner. The SEQEB's own electric vehicle, a Daihatsu Charade, also played a prominent part in both events. It transported the chief judge for the 30km road walk and the referee for the 42km marathon.

The search for space monsters

Sixty-eight prominent scientists from around the world have joined in a call for an international effort to detect radio signals from extra-terrestrial civilisations using existing radio telescopes. It is the first time that such a search has been endorsed by distinguished scientists — including seven Nobel prize-winners — across a wide range of fields.

Carl Sagan of Cornell University initiated the petition, with other signatories including Francis Crick, co-discover of the double helix of DNA, Marvin Minsky, a pioneer of artificial intelligence and Roald Sagdeev, director of the Russian unmanned space program.

Last year funding for Sagan's SETI (Search for Extra-terrestrial Intelligence) project was cut from the NASA budget, although a \$1.5 million grant was made for prototype hardware to analyse signals from outer space. Under consideration is a design for a receiver which can analyse eight million wavelengths simultaneously.

John Billingham, head scientist of the SETI program, believes that there is a good chance of finding extra-terrestrial life because "the laws of Darwinian evolution push life in the direction of gradually increasing complexity."

Other scientists, including some radio astronomers, are not so optimistic. Tony Hewish, acting director of the Cambridge radioastronomy observatory said of Sagan's scheme: "I am rather neutral about this. It is better to attack the problems you are interested in — there are always plenty of exciting things to do in astronomy".

Electronics courses at Newcastle Technical College

Newcastle Technical College will offer a range of trade, post-trade and special courses in electronics in 1983. A part-time Electronics Trades Course is offered, over three years, with attendance either one full day per week or two nights per week.

Block release courses are also available for country students, requiring three days attendance every three weeks. In addition, post trade courses are available in television principles, industrial electronics and semiconductor electronics.

Special courses available include microprocessor circuits and applications, film and television production for education, principles of two-way radio and a two-way radio users' course.

For further information contact the Senior Head Teacher, School of Electronics, Newcastle Technical College, Maitland Road, Tighes Hill, NSW 2297. Telephone 61 0461, ext 367. Enrolments will be accepted on the 3rd, 4th, 7th and 8th February from 10am.

F/A-18 contract to British Aerospace

British Aerospace Australia has won the first design and development contract in Australia associated with the RAAF purchase of the F/A-18 Hornet tactical fighter aircraft. The contract from the McDonnell Aircraft Company is worth some \$10 million and covers the design and development of portable electronic test equipment for the Hornet.

Called the "Avionics Fault Tree Analyser", the equipment will be produced in British Aerospace's factory in Salisbury, South Australia. In addition to use with the 75 F-18s ordered by the RAAF the device may also be used by other customers of McDonnell, raising the possibility of significant export potential.

The Fault Tree Analyser is a portable, microcomputer based instrument which can be connected to the data bus of the F-18 allowing the aircraft's built-in



avionics test system to be monitored and programmed from an external source.

"Bionic ear" developed in Australia


A "bionic ear" may soon be a reality for millions of nerve-deaf people throughout the world.

A prototype implantable hearing aid based on electronic processing of sound in a similar manner to that which occurs naturally in nerve fibres has been developed by the University of Melbourne in conjunction with Sydney-based firm Teletronics Pty Ltd. Recently the Department of Science and Technology agreed to fund further research and development, and it is expected that the device will be available

by the mid-1980s.

The device works by picking up sounds and transmitting them to a miniature receiver implanted behind the ear. The receiver converts the signals to electrical impulses which are conducted to the inner ear where the nerve fibres are stimulated electrically to enable the deaf person to recognise speech and other sounds.

Next phase of the project is a full commercial development of the bionic ear, being undertaken by Teletronics and associated companies.

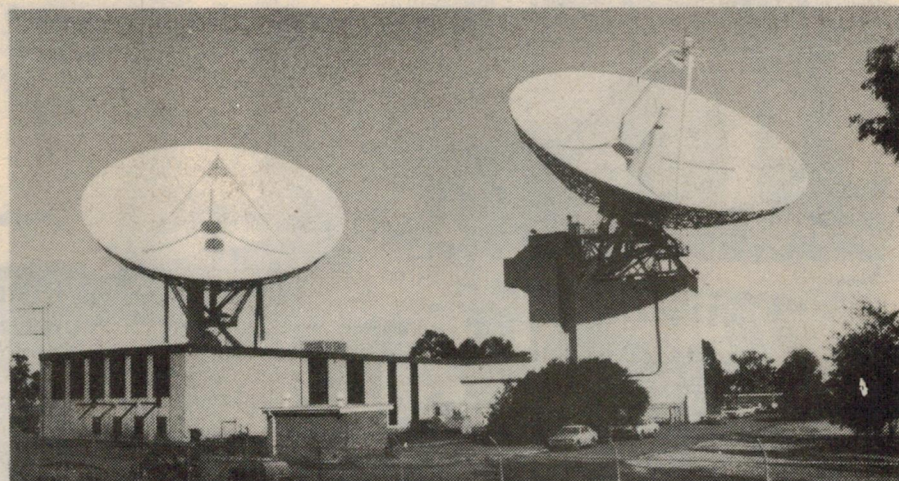

MOREE, NOV 3 — Moree 2, the second of two satellite earth station antennas at Moree in northern NSW, is now in operation following its official opening by the Minister for Communications, Mr Neil Brown. The new dish is 35.2 metres high, weighs 240 tonnes, and is 32 metres in diameter. Moree 2 and Moree 1 (at left) operate to separate Intelsat satellites over the Pacific Ocean, and transmit and receive all types of telecommunications.

The work of the ship's radio officer

Fancy a life on the ocean wave? A ship's radio electronic officer's life combines seafaring and an opportunity to use the latest electronic equipment. It is field that has developed rapidly over the past 40 years, with the promise of a lot more to come.

by CURT COLSTON

In 1934, when I joined the US Navy, a career in radio was most promising for many reasons. A well trained radioman could look forward to rapid promotion in the Navy and a variety of different assignments — in different classes of ships, submarines, shore stations and Navy aviation. In those days there were few opportunities in civilian life, even in the latter half of the depression.

Before 1937, a civilian ship's radio officer (RO) made less than \$60 a month plus his room and board, but it was a job, and an opportunity to travel all over the world. Pan Am had started a flying boat service with their famous Clippers which carried an FRO (Flight Radio

Operator); usually recruited from ship ROs and specially trained. Large aeroplanes in the old days had radio equipment that was very little more elaborate than a ship's radio equipment.

This situation changed so rapidly that, by the beginning of World War II, we had ILS (Instrument Landing System), GCA (Ground Controlled Approach), AM VHF, and ADF (Automatic Direction Finders) (also known as the "bird dog" because the needle pointed to the radio beacon to which it was tuned).

Flight radiomen continued to be used in aircraft flying over the oceans and desolate areas for over ten years after the end of the war. These were the good

years for radiomen, with trips to Paris, Amsterdam, Geneva, Frankfurt, Luxembourg, etc. After each trip the FRO had a minimum of three days leave and sometimes as much as 15 days.

A flight radio officer was required to have a complete knowledge of his equipment, as well as a knowledge of navigation and meteorology in order to anticipate demands by the captain. In addition to maintaining communications, making hourly position and weather reports, copying weather reports from the destination and alternates, and being ready to repair his equipment in flight, he was required to be able to man the direction finder in an emergency and to assist the pilot in "QDM" approaches.

In the QDM landing approach, as at Sandweiler Airport in Luxembourg where the only radio navigational facility was a radio beacon, the radioman would give the distance off and the magnetic course to steer for that leg of the approach. In actual practice the co-pilot would keep track on the ADF and this approach was not used where ceiling and visibility were good. This skill was acquired by long hours of drill on the direction finder trainer at the company operated FRO school. Figuring the distance to the station was done by knowing the true airspeed and the time for the bearing to change 10 degrees when the aircraft was abeam of the station.

In the early days, two radiomen were carried on flights from New York to Europe. These flights with fuel stops in Gander, Newfoundland; Shannon, Ireland; or Goose Bay, Labrador; Keflavik, Iceland; and Prestwick, Scotland took about 24 hours in the DC-4.



The author's ship, the Jersey. Electronics plays an increasing role in modern marine operations, from communication and navigation to the discharge of cargo.

Back to sea

When the airlines converted to long-range radiotelephony, it was the end of a wonderful era for the FROs, many of whom went back to sea. Some FROs saw the writing on the wall long before the end came, and became pilots, navigators or flight engineers.

In the meantime electronic equipment on the ships was slowly changing and becoming more elaborate. With the addition of radar, echo sounders, automatic direction finders, VHF and UHF, satellite navigation, radio facsimile, walkie talkies, and entertainment equipment such as TV, HiFi, shortwave broadcast receivers, video tape players, etc, the Radio Officer became the Radio Electronic Officer with a corresponding increase in pay. The average pay of an American REO is \$US5500 per month (before taxes). The pay on tankers and the larger bulk carriers is much higher.

Gone are the days when the RO could secure the radio shack upon entering some exotic port, go ashore, and return to the ship a couple of hours before sailing time. There is so much equipment to care for now that there is always something that needs attention. If it is not the radar or the echo sounder that is kaput, some sailor is complaining about one of the TV sets.

Compared to the modern REO, the radioman had a relatively simple job in the old days. He had in his care only two transmitters, two receivers, a manual direction finder, an automatic alarm, lifeboat radio, emergency batteries, and the ship's antenna system. All communications were by Morse on CW (continuous wave), or MCW (modulated continuous wave). The transmitters were therefore very simple. Some were MOPA (master oscillator, power amplifier) of only two stages. Some included buffer stages and driver stages, and some used crystal controlled oscillators.

Then, as now, the RO stood watch on 500kHz (600 metres or 500 kilocycles in those days), the international distress and calling frequency, for eight hours a day between 8am and 8pm. When going off watch the RO turned on the automatic alarm, which stood his distress watch for him. The auto alarm is activated by series of four second dashes separated by a space of one second. When a ship within about 1000km to 2000km transmits the auto alarm signal a relay in the auto alarm closes, energising the alarm bells on the bridge, in the radio room and in the RO living quarters.

In the old days the auto alarm was a very clumsy and cantankerous device. Timing was effected by motor driven wheels, cams, and relays. It was the greatest source of maintenance headaches.



Cluster of antennas on the MV Zim Kaohsiung is typical of modern vessels.



Transceiver, automatic alarm and emergency equipment in the care of the author.

The RDF (radio direction finder) was a simple device consisting of a rotatable directional loop and a receiver. The lifeboat radio was a ponderous box shaped instrument which was powered by a hand-cranked generator. It was kept on the bridge and carried to one of the lifeboats at the beginning of lifeboat drill.

In those days there was no radar. Radar came much later and it was years after the end of World War II that all merchant ships were equipped with radar and even longer before they started carrying two radars.

Most ships now have two radars. One of the most advanced ships' radar (exclusive of naval radar) is the Decca radar, not to be confused with the DECCA Navigation System. The Decca radar is all solid state, except the CRT, with the

klystron local oscillator replaced by a Gunn diode. Two Decca radars may be installed so that if a modulator unit, display unit, or scanner of one is faulty, and some other unit is faulty in another, the good units may be switched to operate together, so that you have one radar that is operational.

Navigation equipment

The most advanced and elaborate piece of ship's electronic equipment is the "Satnav" (satellite navigator). Satellite navigation operates on the principle that, if a satellite's orbit, and its position in that orbit, is precisely known at any time, then the ship's position can be determined by measuring the Doppler shift on signals from the satellite.

Best bass yet from a kit!

As featured in
Electronics
Australia Projects
June and July
1981.

Now Peerless introduces another major advance to kit-set loudspeaker technology. A bass speaker with a rigid polypropylene cone that clearly outperforms traditional paper composite cone speakers to provide: • Cleaner, tighter bass sound reproduction • Low colouration and distortion • High efficiency, suiting 25W to 100W amplifiers • Consistent rigid panel, low mass speaker cones.

Other outstanding features of Danish-built Peerless speaker kit-sets are: • Sealed back mid-range with excellent linearity and low distortion • Latest Peerless 1" soft-dome tweeter • State-of-the-art crossover networks • Exceptionally flat response extending to 25,000 Hz.

Choose from these EA/Peerless speaker projects:





- PAS 100 12" 3-way 100W (100L)
- PAS 60 10" 3-way 90W (60L)
- PAS 25 8 1/4" 2-way 60W (25L)

includes drivers, crossover, wiring and instructions

Sole Australian Importer, G.R.D. GROUP PTY. LTD.
698 Burke Road, Camberwell, Vic. 3124. Trade enquiries welcome.



Peerless
CONCORD/6480

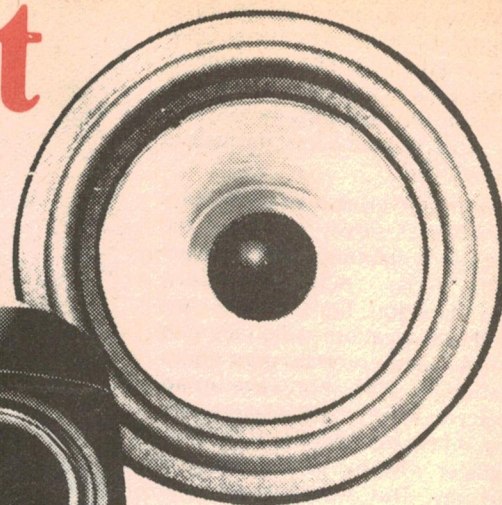

N.S.W.

Bondi Junction

Danish Hi-Fi Aust. Pty. Ltd. Ph: (02) 387 5878

Concord

Electronic Agencies Ph: (02) 745 3077

Crows Nest

Deeva Hi-Fi Ph: (02) 439 3999

Dee Why

David Ryall Electronics Ph: (02) 982 7500

Wagga Wagga

Car Radio & Hi-Fi Centre Ph: (069) 21 4618

VIC.

Ballarat

Turner Audio Ph: (053) 32 2042

Camberwell

Danish Hi-Fi (Aust) Pty. Ltd. Ph: (03) 82 7348

Cheltenham

Beland Electronics Ph: (03) 550 2279

Geelong

Steve Bennett Audio Ph: (052) 21 6011

Hawthorn

Tivoli Hi-Fi Ph: (03) 818 8637

Warrnambool

Bruce Henderson Audio World Ph: (055) 62 5147

S.A.

Adelaide

Hi-Fi Acoustic Ph: (08) 223 6774

Adelaide

Danish Hi-Fi Aust. Pty. Ltd. Ph: (08) 51 2124

Goodwood

The Acoustic Foundry Ph: (08) 271 0276

Hawthorn

Sound Craftsmen Ph: (08) 272 0341

St. Peters

Miltronix Ph: (08) 42 3781

W.A.

Nedlands

Danish Hi-Fi Aust. Pty. Ltd. Ph: (09) 386 8564

Kalamunda

Kalamunda Hi-Fi Ph: (09) 293 4333

QLD.

Brisbane

Brisbane Agencies Ph: (07) 221 9944

Audio Centre

Ph: (07) 391 5606

Barunda

G. Mills Stereo Ph: (07) 284 2495

Redcliff

Hi-Fi Sales Ph: (07) 284 2495

★ BRIGHT STAR CRYSTALS

Specifications, Dimensions and data sheets available on request


BULK ORDERS: In addition to our normal range we can supply quantity orders (100 up) at very competitive prices. All we ask is 50% of cost with order balance 30 days.

DELIVERY: 5-6 weeks from receipt of Order. Ring for quote: (03) 546 5076. Telex: AA 36004.


NEW NSW AGENT: APP Master Communications, Sydney (02) 682 5044

BRIGHT STAR CRYSTALS

35 EILEEN RD, CLAYTON, VIC
ALL MAIL TO: PO BOX 42, SPRINGVALE 3171




CRYSTALS



CRYSTAL UNITS
FOR QUARTZ
CRYSTAL CLOCK

CRYSTAL OVENS AND OVEN OSCILLATOR UNITS

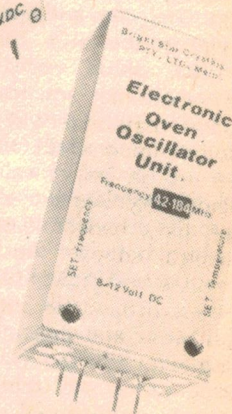

The equipment on the ship consists of a quarter wave ground-plane antenna to receive 400MHz signals, a receiver, and a microcomputer. The US Navy operates six "Transit" satellites in orbit and the life of a Transit satellite is over five years. The accuracy of Satnav is around 300 metres, and a major factor contributing to this accuracy is a crystal in a constant temperature oven giving an oscillator accuracy of 1 part in 10^{11} .

In addition to the signal by which the Doppler shift is determined, the transmitted satellite data includes fixed and variable parameters. Fixed parameters are those of the satellite's orbit. Variable parameters are the small changes in the orbit over time and are determined by the US Navy tracking stations and up-dated every 12 hours. The up-dated information is transmitted to the satellites by the monitoring stations.

The input to the microcomputer consists of the above data plus the Doppler shift as measured by the receiver.

The read-out is on seven segment LEDs or on a VDU. By feeding course, speed, and current or drift into the input of the computer, the VDU will display the position at any time between fixes. Alternatively, the computer will give course and speed using the information obtained on the last pass of the satellite. Each measurement of Doppler shift gives an LOP (line of position). Several LOPs are obtained on each pass of the satellite. There are four polar orbiting satellites, their orbital planes separated by 45 degrees. The position of the ship is fixed by the intersection of two or more LOPs.

Other navigation systems are Loran, Decca, Consol, and Consolan. Loran and Decca are known as the hyperbolic systems because their LOPs are hyperbolas.

Marine electronics

Electronics on board ships has increased enormously in complexity so that the REO has had to study and learn continuously to keep abreast of his equipment. The shipping companies plan to eliminate the radioman on ships by 1990. They probably will be able to eliminate him as a key pounder, but ships will always need a man to care for the electronic equipment and make repairs when underway.

Some American REOs have university degrees in electrical or electronic engineering. Almost all of the young ones have had at least three years at technical college. Australian radio officers are being given study leave in addition to their regular leave and are constantly working to up-grade their knowledge and ability to maintain modern electronic equipment.

An example of radio officers of other nations around the world is Hein


Marine electronics — then and now



The advertisement shown here is reproduced from the March 1, 1922 issue of "Sea, Land and Air" magazine. The Marconi School of Wireless then offered a home study course in radio, complete with a free gramophone and practice records. The advert concluded "With the limitless possibilities of Wireless, intending students should not delay".

WE GUARANTEE TO TEACH YOU UNTIL YOU
ARE PROFICIENT.

All Marconi Home Study Students are supplied free with a Gramophone and Wireless Training Records, Reference Books, and Key and Practice Buzzer Set. These instruments, etc., become the property of the student.

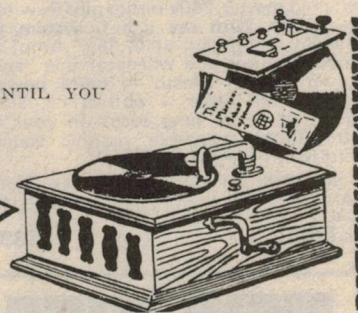

Schmidt of Bremen who is RO on the container ship MV Columbus Victoria/DGVX, which calls at Sydney. Two modern communications receivers, a 1kW transmitter with CW, MCW, and SSB, a reserve transmitter, solid state auto alarm, and an ultra modern operating console are part of the equipment in his radio room.

The antennas in the photograph are on the MV Zim Kaohsiung of Brake, Israel. In the lower middle of the photo, the hemispherical shapes resembling flying saucers are the Vorta TV antennas. The double rings at the top comprise the Bellini-Tossi direction finder antenna. Unlike the loop antennas which rotate,

the Bellini-Tossi is stationary and has a "search coil" in the receiver. This search coil rotates in the same manner as the loop in the loop antenna type. Just below the direction finder is one of the slotted waveguide type radar antennas. This is known as a "cheese" type antenna. The fork-like vertical antennas are for the transmitters.

There is still a future in marine electronics and young men who are interested in a career in marine electronics are trained at the Australian Maritime College in Launceston. Inquiries should be directed to the Admissions Officer, Australian Maritime College, PO Box 986, Launceston Tas, 7250.



Latest NV10 navigation system by Rediffusion uses both Omega beacons and Satnav satellite data. (Photo courtesy of Vicom International Pty Ltd).


YOUR MONEY BACK

PLUS \$5 If Altronics JetService Delivery is not the Best in Australia


ORDER FROM ALTRONICS WITH COMPLETE CONFIDENCE. Compare this check list with any other Australian Electronics Supplier ... ★ Delivery Time ★ Packing ★ Product Quality ★ Value for Money ★ Technical Queries Answered ★ Prompt Back Order Advice of not in stock items. If after receipt of your JetService order you are not convinced Altronics service is superior to any other Australian Electronics Supplier you may return your purchase to us for a full refund plus \$5 for your trouble.

Regards

Jack O'Donnell

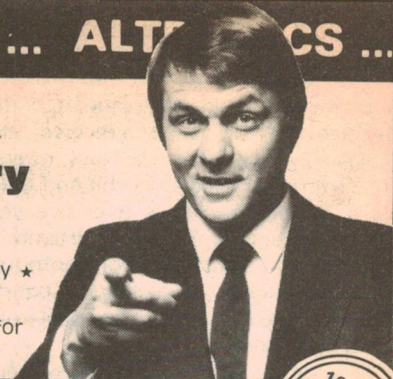

See EA November, 1982



POWER UP

A MUST
FOR YOUR
COMPUTER
SYSTEM

This great new Project from EA is the answer to a Maidens Prayer.

What Does it Do?

A single 240v mains plug and lead feeds one unswitched master 240v outlet plus 4 switched 240v outlets. With say a 'hi-fi system, plug your main equipment item (e.g. Amp) into the master outlet and whenever you "switch on" your amp — presto — mains power is applied to the other 4 outlets i.e. simply "turning on" your amp turns on your tape cassette, tuner, turntable, graphic equaliser without mains spikes, plops etc.

Just the shot for your Computer System. The Altronics Kit includes case and all outlets.


Cat K600. \$39.50

The Brilliant New MICRON 12 Green Phosphor Monitor

Features 12 inch Screen, Front Controls On/Off, Contrast/Reverse, Brightness, Power 240V/50Hz or 12V DC, Input RCA Type, DC Output Jack 12V/1.1 AMP — power your Micro direct without a power pack, Bandwidth 10Hz to 20MHz the resultant definition is truly amazing for a low cost monitor.

GUARANTEED BY ALTRONICS! Incredible Value

Cat D1112 \$199.50

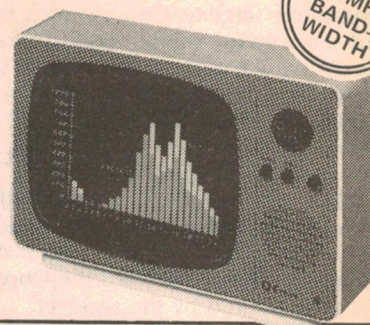

10 Hz -
20 MHz
BAND-
WIDTH

MICRON D1120



WHY
PAY
OVER
\$80

Adjustable Azimuth DATA CASSETTE


At last a Data Cassette Recorder/Player you can afford. The Micron D1120 is fully adjustable azimuth (absolutely essential in our opinion) and incorporates tailored audio frequency response audio stage together with low distortion.

Now you can save and load software in your Micro with confidence.

Micron D1120 Data Cassette Only \$49.50

NEW HITACHI F SERIES SQUARE SCREEN DUAL BEAM CRO

SUPERB NEW MODEL V152F DC TO 15 mHz 1Mv/DIV DUAL TRACE

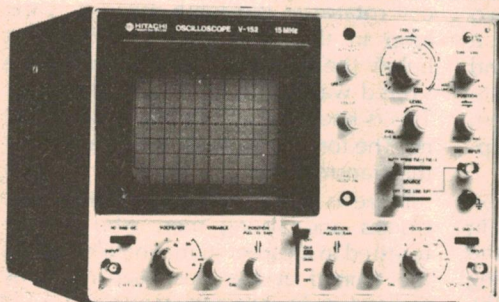

SPECIFICATIONS

Vertical deflection	5mV/div to 5V/div
Sensitivity	10 calibrated steps 1mV/div to 1V/div
	When using x5 amplifier: Uncalibrated continuous control between steps 1 - 2.5 (provided with click-positioning function)
Bandwidth	DC to 15MHz -3dB at 4div DC to 7MHz -30dB at 4div When using x5 amplifier: 24ns for x5 70ns typ
Rise time	
Signal delay time	
Max. input voltage	600Vp-p or 300V DC - AC peak, at 1kHz
Input Coupling	AC, GND, DC
Input impedance	Direct 1M ohm approx 30pF
Operating modes	CH1 CH2, DUAL, ADD, DIFF
X-Y operation	CH1 X axis, CH2 Y axis
Sensitivity	5mV/div to 5V/div When using x5 amplifier: 1mV/div
Phase difference	
X bandwidth	DC to 10kHz within 3
Dynamic range	DC to 500kHz -3dB
CH1 output	4div or more
Output voltage	20mV/div or more terminated into 50Ω
Band width	50Hz to 5MHz -3dB
Output impedance	Approx. 50Ω

FREE DELIVERY
ANYWHERE IN
AUSTRALIA THIS
MONTH


CAT 00152
PRICE ONLY

\$529⁵⁰ TAX
EXEMPT
\$599⁵⁰ TAX
PAID

Features ★ X-Y Operation ★ Vertical sensitivity 1mV/div. ★ 10 x Sweep time magnification with 1-touch operation ★ Convenient CH1 signal DVM output ★ Z-axis input provided — possible to use as CRT display ★ 0.2us to 0.2s — wide sweep range setting ★ Five modes of vertical operation ★ Panel layout with colour coding of respective functions.

Horizontal deflection	AUTO, NORM, TV (+), TV (-)
Trigger modes	CH1, CH2, LINE, EXT
Trigger source	AC
Trigger coupling	TV sync-separation circuit 1div or more (V sync-signal)
TV sync	1Vp-p or more (V sync-signal)
Internal	
External	
Trigger sensitivity	
	Frequency Internal External
	20Hz to 2MHz 0.5div 200mV
	2 to 15MHz 1.5div 800mV
	30Hz
AUTO low bandwidth	
Trigger slope	Input impedance approx 1M ohm, 30pF or less
External trigger input	Max. input voltage 100V (DC - AC peak at 1kHz)
Sweep time	0.2us/div to 0.2s/div -5%, 19 calibrated steps Uncalibrated continuous control between steps 1 - 2.5 (provided with click-positioning function)
	10 times (1-7%)
Sweep time magnifier	100ns/div (20ns/div and 50ns/div, not calibrated)
Max. sweep time	
Amplitude calibrator	
Waveform	Approx. 1kHz -10% (typ), square wave
Voltage	0.5V -15%
Power requirements	100/120/220/240V -10%, 50 to 60Hz, approx 40W
Dimensions	Approx. 275(W) x 190(H) x 400(D)mm
Weight	Approx. 8.5kg

The Famous Microbee Microcomputer in stock now at Altronics

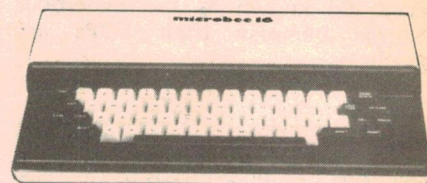

★ 16K PLUS PACKAGE ★

Full 16K Microbee including Power Pack. Battery Backup (allows you to store programme "on board" for months at a time). Parallel Port fitted. Fantastic Value!

Cat D1018 \$449.00

★ EDITOR ASSEMBLER OPTION ★
Includes Handbook

Cat D1030 \$59.50

★ WORD PROCESSOR ROM PACK ★

Cat D1035 \$89.50

★ 16-32K UPGRADE PACK ★

Cat D1040 \$125.00

★ 32-64K UPGRADE PACK ★

Cat D1045 \$175.00

Call in for a demo of the fantastic Microbee at Altronics Computer Centre 105 STIRLING STREET, PERTH.

For Address, Phone No. and Despatch details see our Double Page Advertisement pages 66 - 67

AT DOUBLE THE PRICE OUR DAINICHI HIGH FIDELITY SPEAKERS WOULD STILL REPRESENT OUTSTANDING VALUE

Altronics have teamed up with one of Japan's most respected speaker designer/manufacturers (Dainichi manufacture OEM speakers for Pioneer) The result, an outstanding range of pure fidelity speakers available to you at IMPORT PRICES for which we will no doubt incur the wrath of our competitors.

CONE TWEETER 50 WATT
50 watt max. power 8 OHM Z.

Amazing performance budget price. Frequency response 2 KHZ-18 KHZ. 110mm Diam. Hole centres 79mm. Australia's best value at this price.



C 3020 \$7.50
4 or more \$7.00

DOMT TWEETER 60 WATT
60 watt max. power.


Silky smooth frequency response. 1.5 KHZ to 20 KHZ. Wide Angle dispersion. Massive power handling capacity. Diam. 94mm. *High spectrum. Purity. incredible low price!*



C 3010 \$14.50
4 or more \$13.50

MIDRANGE 50 WATT
Midrange clarity that has to be heard to be appreciated!

Absolutely 1st class reproduction of mid-range - piano, vocal, guitar, violin etc. **Huge 50 watts max. input. 8 OHM.** Frequency response 700 - 5 KHZ. *Value Plus!*



C 3030 \$17.50
4 or more \$16.90

WOOFER 307 mm (12 in.)
40 watts max. power 8 OHM.

Roll edge cone suspension. Resonant fo 30 HZ. Frequency range 30-2 KHZ. Smooth faithful bass speaker. **Ideal Hi-Fi replacement.** 48mm voice coil.



C 3040 . . . \$29.50
4 or more . \$27.50

OUR POWER RATINGS are conservative RMS ratings NOT music power or peak power ratings that some manufacturers quote. **MAKE UP A LOW COST STEREO SYSTEM** The combination of C3010/C3030/C3040 will enable you to make up a simply superb speaker system for less than \$150 (less cabinets) — send stamped addressed envelope for enclosure and crossover designs.

MINI STRIP 100 HOLES

P 1000 \$2.50
640 HOLES

P 1005 \$9.80
640 + 100 HOLES

P 1007 \$11.95
640 + 200 HOLES

P 1009 \$13.95

BREADBOARDS


PROTO TYPE BREADBOARDS

- * You just plug-in vertically your components without soldering.
- * Proto Boards will accept all LSI's, semis, transistors, diodes, leds, resistors, capacitors etc.
- * 22-30 gauge solid hook up wire for inter-connection.
- * Boards are "keyed" enabling simple "add on" facility.

ASSEMBLE CIRCUITS IN MINUTES — INSTEAD OF HOURS. MAKE CHANGES AND MODIFICATIONS IN SECONDS. RE-USE COMPONENTS — SAVE MONEY ON HEAT AND DAMAGE.


FREE FREIGHT DELIVERY
ON THESE PRODUCTS THIS MONTH!

400 + 1280 HOLES

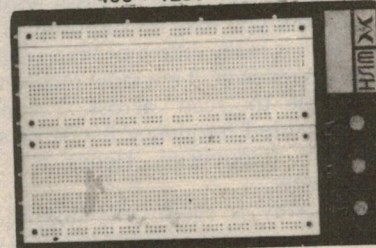

P 1012 \$29.50

500 + 1920 HOLES

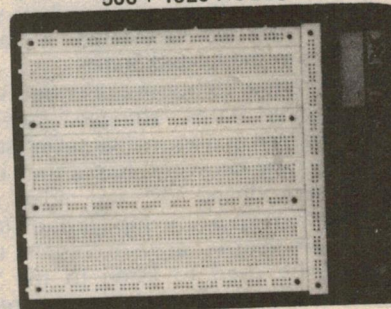


P 1015 \$45.00

NEW D RANGE CONNECTORS SUPERB AB UK QUALITY



				1-9	10 +
P0880	DB9	Male	9 Pin	2.50	2.20
P0881	DB9	Female	9 Pin	2.95	2.70
P0890	DB15	Male	15 Pin	2.95	2.50
P0891	DB15	Female	15 Pin	3.50	3.00
P0900	DB25	Male	25 Pin	4.50	3.95
P0901	DB25	Female	25 Pin	4.95	4.50




PRICE SLAUGHTER WITH TOP SELLING ETI BOOKS January Only

		Was	Now
B1150	ET1 Circuits No.1	2.95	2.00
B1155	ET1 Circuits No.2	2.95	2.00
B1156	ET1 Circuits No.3	2.95	2.00
B1165	ET1 Top Projects No.6	3.95	3.00
B1170	ET1 Top Projects No.7	3.95	3.00
B1185	Project Electronics	4.75	3.00
B1186	ET1 Circuit Techniques Vol.1	4.75	4.00
B1195	ET1 Electronics It's Easy	5.95	5.00

BANKCARD JETSERVICE-DELIVERY NEXT DAY

BANKCARD JETSERVICE-

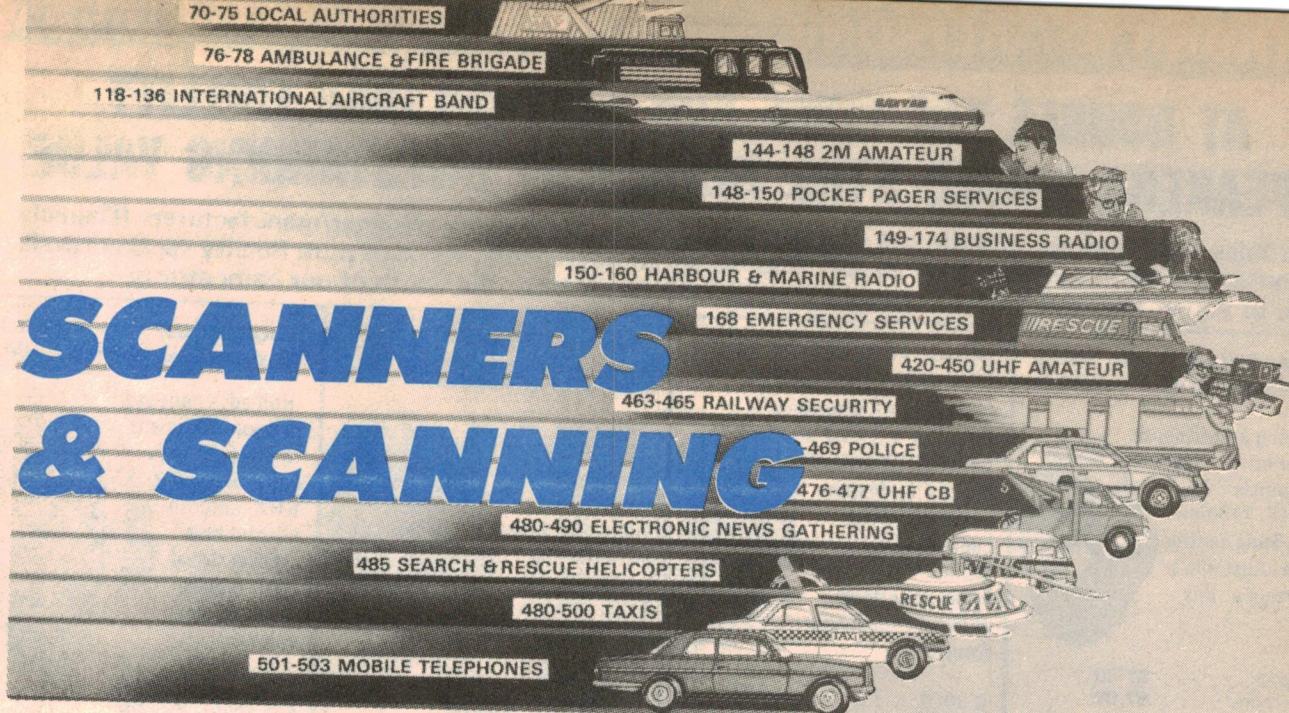

In recent months there has been a great deal of interest in the subject of scanners. What are scanners and what are people using them for? This article gives some of the history and technical background to this latest product technology.

When you have a close look at a scanner you may be surprised to realise that it is really little more than a glorified radio receiver. It is a radio receiver which is able to "scan" across a number of designated frequency bands or specific "spot" frequencies. Hence the name, "scanner".

So why is there any interest, then? Basically, people are interested in what a scanner can receive and how it receives it. To understand how this came about, it is necessary to go back a few years. More than ten years ago, in fact, it started in the United States.

Before the CB boom got under way in the United States, "stringers" (freelance cameramen and journalists selling stories to the new networks) found they could buy secondhand VHF taxi radios quite cheaply. With a little modification (often no more than a change of crystals), these could be used to listen to the local police, fire brigade and other emergency services and so the journalist could often obtain a good story ahead of colleagues not similarly equipped. (This story seems to have a close parallel with tow truck drivers in Australia. . Ed.) It wasn't long before US manufacturers caught on to the trend and in US magazines such as "Popular Electronics" one can find advertisements for scanners as long ago as 1969.

These early scanners were relatively unsophisticated and generally covered four or eight frequencies over a limited range and these were controlled by separate crystals. Perhaps the most advertised scanner in US magazines of

the period was one made by Regency. Just who the product was intended for was not stated.

Later on, as the CB boom got under way in the US, some CB transceivers were offered which had a "scan" facility but this was confined to the 27MHz CB band. For the most part though, it would appear that there was little general interest in scanners until the CB boom died a few years ago. Then, having lost interest in CB (or childrens' band as some people derisively called it) hobbyists began to cast about for a new electronic pastime.

Lo and behold, the scanner beckoned. Now, scanners are a great deal more complicated and cover a very wide range of frequencies. They are microprocessor-controlled and can be programmed with lots of individual frequencies without the need for anything as prosaic as ordinary crystals. Today's models use phase-locked loop

circuitry to synthesize all frequencies from a single crystal-controlled reference.

Scanners now cover both the VHF and UHF bands and have features such as "priority" channels, channel lockout and band search. Some models even use the microprocessor to control the volume and squelch levels.

How do they work?

As hinted at above, the phase-locked loop is at the heart of typical scanners. The PLL is essentially an oscillator which can operate at any frequency which is a multiple of the crystal reference oscillator which is typically at 2MHz or 4MHz. This reference frequency is divided down to 1kHz, 5kHz or 10kHz and the selected PLL frequency then becomes a precise multiple of this low frequency, eg, 66.152MHz.

In effect, the PLL is the first local oscillator in what is a double superheterodyne receiver. The PLL frequency is controlled by a counter/divider (in the microprocessor) and this can be stepped through a designated band of frequencies until a signal strong enough to break through the squelch level is received. The



The Bearcat 20/20 is one of the deluxe mains-operated scanners on the market.

receiver then locks onto this signal until it ceases.

Some scanners have an option whereby they will only stop and lock onto a signal for a few seconds. If you are interested in what is being said, you press a button to stop the scanning function.

If the scanner has the so-called "priority" channel function, it will automatically switch back to the priority channel if a signal is received on this frequency.

Since the functions are controlled by a microprocessor there is a random access memory (RAM) to store all the desired frequency settings. These are maintained in the RAM even when the unit is turned off, usually by a small 9V battery.

Since most scanners cover a very wide frequency range, they need to have a number of "front ends" and two detectors, one for amplitude modulation and one for frequency modulation. These are automatically switched in depending on the frequency being selected for reception by the microprocessor.

So basically a typical scanner is a microprocessor controlled double superheterodyne receiver which can be automatically set to scan almost any radio frequency band apart from those used for normal entertainment such as the AM and FM broadcast bands.

What can you listen to?

This will depend on a number of factors such as:

- (a) the frequency coverage of the particular scanner;
- (b) your location; whether you are at home or in your car;
- (c) your antenna; and
- (d) the channels actually in use at the time you are listening.

Perhaps the most important factor of those above is the antenna. All scanners are supplied with an extendable whip antenna which plugs directly into the back of the unit. For best results though, an outside antenna mounted on the roof of the dwelling is required. Then there is a choice to be made between broadband omni-directional antennas such as the groundplane or discone, or higher gain directional antennas. A selection of antennas is usually available from scanner retailers.

Depending on the final installation and the length and quality of coaxial cable required to bring signal from antenna to scanner, the additional cost to be added to a scanner purchase may be as much as \$100 or more.

Some scanners can operate from 240V mains or from 12V DC. Thus they can be used at home or in the car. Others operate from 12V DC only so they need an external power supply if they are to be used at home.

Again, if the scanner is to be used in

the car, an antenna installation will be required although this may be a relatively simple "gutter-grip" type.

The coverage of most scanners commences around 66MHz — the bottom end of the VHF "low band", a very popular business radio band. This extends right up to 88MHz, the bottom end of the FM radio band, which is normally not covered.

Some scanners cover the 108 — 136MHz international aircraft band. However, there is a problem here in that the aircraft band uses AM mode exclusively. So in order to do this the scanner has to switch in an AM detector. In models that offer this band, this is sometimes done by the microprocessor, but usually requires manual switching.


Above the aircraft band are TV channels, which are usually covered by a

UHF bands, as do security services, taxis, tow truck operators and news services. And right at the top of most scanner's coverage is the frequency allocation for mobile telephones.

Controversy

Understandably, some of the legitimate users of these services do not like the idea that what was once ostensibly private communication can now be listened to by all and sundry. In the United States the situation is apparently similar and some states enacted laws restricting scanner use. Whether these laws have been enforceable is another matter though, because of the US constitution.

Some US metropolitan police forces are now becoming favourably disposed towards the idea of their activities being

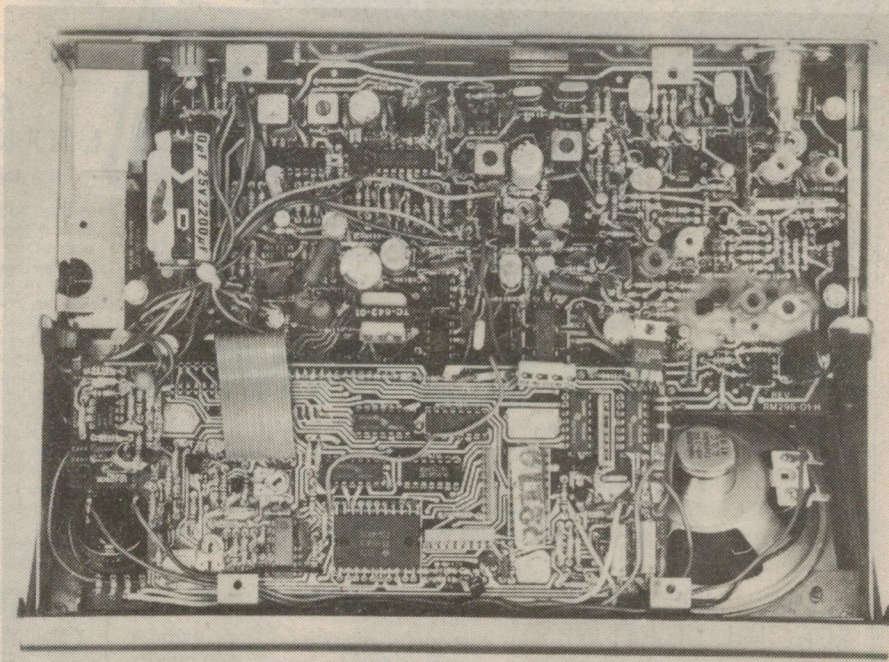

This is the interior of the Bearcat 20/20 scanner. Note the microprocessor which is a quad in-line package.

scanner more because it's easier to cover them than not to! Above this again, is the 2m amateur band which is predominantly FM mode. Then comes the international VHF marine band around 156MHz which is again FM.

Higher still is another business radio band, the VHF "high band". Also in this band are the many emergency services and municipal and county councils. Most scanners then end their VHF coverage at around 174MHz because above this is mostly occupied by television channels. As most would realise, these do not make very interesting listening anyway!

As far as the UHF bands are concerned, most scanners begin at around 420MHz. It would seem that much of what interests scanner listeners occurs on these bands. For example, most metropolitan police forces now use the

actively monitored by the public. The reason for this is that the public gain some idea of the great amount of law enforcement activity.

In Australia, though, most legitimate users of these bands are not so favourably disposed. Police forces in particular are hostile and some moves have been made to ban scanners or to have scramblers used on the police radio network.

Legality of Scanners

Many readers will want to be assured of the legality of scanner use before they consider purchase of a unit. This is a question which may not be resolved until the new Communications Bill is enacted into law and this may take some time. For the present, the current Wireless Telegraphy Act of 1905 (when technology was somewhat less

MORE FOR YOUR DOLLAR!

Latest Technology

The brilliant
DICK SMITH

PRO 40 SCANNER

Compare this superb Scanner with others of similar performance elsewhere at nearly twice the price! The new PRO 40 Scanner from Dick Smith represents the state-of-the-art in computerised scanning receivers! Completely solid state computer - controlled circuitry - no expensive crystals to buy - complete with backup battery for stored frequencies.

LOOK AT THESE SPECIAL FEATURES

Touch-type splash proof keyboards for direct entry of all operational commands, frequencies etc. Ideal as either a base or mobile scanner (operates 12V - beware of others that don't operate from 12V!) with its own self-contained whip antenna or external plug-in antenna. Also included is a specially prepared Australian instruction manual written and produced by our own engineers.

ALL FOR ONLY \$399

65-520MHz Antenna specifically designed for scanners
Cat D-4430 \$49.95

YOU CAN HEAR

Just about everything from harbour control nudging a supertanker into its berth, to telephone conversations from cars speeding along city streets! All the emergency services, authorities and forces And of course there are thousands of business radio stations, amateur and CB radio operators. Plus the thousands of stations in the band that we don't know about yet (we're waiting for you to tell us about them!) Cat D-2805

FREE THIS MONTH

This month 'Dick Smith's Australian Radio Frequency Handbook' (normally \$12.95) is yours free with every PRO 40 Scanner.



Or \$9.27 per week to approved customers.

FAMOUS BEARCAT

BEARCAT QUALITY — ECONOMY PRICE!

Amazing value - a quality micro-processor controlled scanner UNDER \$300! That's the superb Bearcat 150FB - the ideal monitor scanner for business, emergency services, news gatherers, etc. With up to 15 channels programmable into its computer memory, with lockout and delay facilities available, you're ready to monitor a huge variety of special interest frequencies. At the touch of a button, you can lock any of them on so you won't miss any of the action. And changing the frequencies is as easy as punching in a few digits from the touch-sensitive keypad. If you're business depends on reliable monitoring, you need the Bearcat 150FB. 12V operated, (240V with optional adaptor). Cat D-2800

That's the 150FB ONLY \$285

A BRAND NEW BEARCAT

Introducing the all-new Bearcat 200 - a feature-packed scanner at a budget price. With extended frequency range (covers up to 512MHz to include mobile telephones, etc) and splash-proof keypad, you'll be amazed at the Bearcat 200's versatility - especially at the low, low price. Holds up to 16 channels in memory, with priority and lockout capabilities, delayed scanning, full band search facilities and direct channel access. Ideal as a mobile scanner, too - operates from 12V DC - or use at home with an optional 240V mains adaptor. And no crystals to buy: everything is controlled by the inbuilt microprocessor! Catch all the action with this superb new Bearcat 200. Cat D-2801

That's the Bearcat 200 ONLY \$349

FIND OUT WHERE AND WHO!

DICK SMITH'S AUSTRALIAN RADIO FREQUENCY HANDBOOK

Up-to date and thorough listings of virtually all the VHF/UHF radio users we've been able to find. YES - find out who is where - and where to listen for all the excitement! PLUS: air land, marine band, and how to use a scanner, amateur radio and CB etc. Cat B-2323

VALUE AT \$12.95



DICK SMITH Electronics



SEE PAGE 5 FOR FULL ADDRESS PANEL

A405/CT


\$50,000 IN PRIZES TO BE WON IN THE MIGHTY MATCH-UP COMPETITION.

SCANNERS & SCANNING

advanced) clearly outlaws unlicensed receivers:

"No person shall erect, maintain or use equipment for the transmission or reception of messages by Wireless Telegraphy" (revisions to the Act include Telephony in the definition of Telegraphy). By the above clause, the use of scanners is well and truly caught.

Two previous court decisions may have some bearing on any future legal proceedings involving scanners. The first, some years ago, became known as the "Nova-tech case" and involved a receiver which was widely advertised as being capable of receiving police frequencies. The importer/retailer concerned was charged under the Wireless Telegraphy Act clause quoted above.

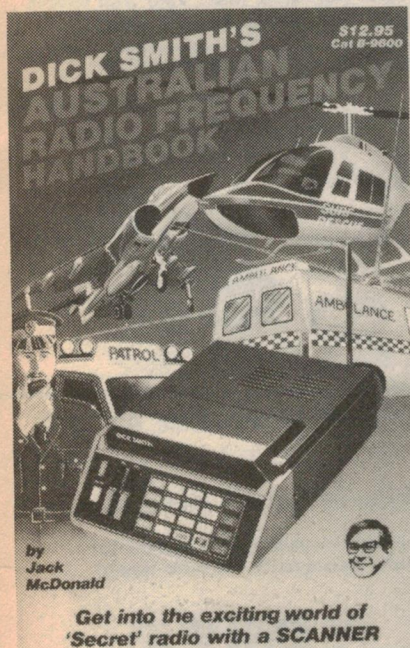

This book has been recently released to provide a guide to the scanning scene.


The case was eventually dismissed on the grounds that the Nova-tech receiver, as with most receivers available at the time, also had the AM broadcast band available. (Editor's note: Scanners do not include AM or FM broadcast bands although they do include some of the television channels).

A more recent and indeed, much more relevant case, occurred in Melbourne in 1979. The Victorian police discovered that a journalist was using a scanner to monitor their activities to gather new stories. The journalist was again charged under the Wireless Telegraphy Act.

Justice McInerney of the Supreme Court ruled that the journalist had no case to answer. An appeal by the Commonwealth was mooted at the time



This is the Dick Smith Pro 40, one of the lower priced scanners available.

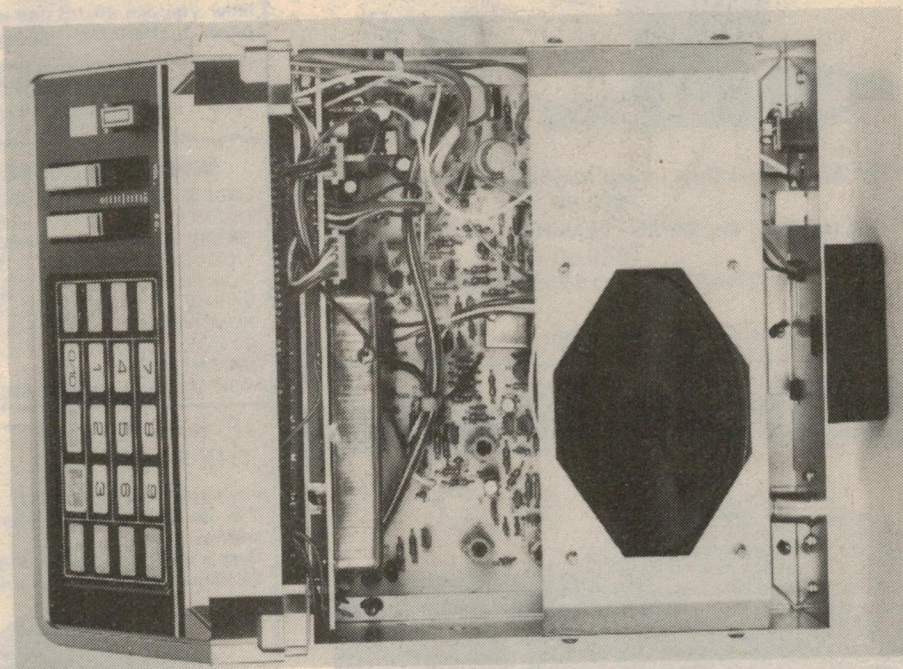

This is the interior of the Dick Smith Pro 40. The battery for the memory backup supply is on the back of the case.

but to this date, it has not been moved. This may or may not have created a precedent. Essentially then, the strict legality of scanner use remains doubtful and this may still be the case when the newly drafted Communications Bill is enacted into law at some time in the future.

Perhaps predictably, many purchasers have not worried about these questions because a large number of scanners have been sold in Australia in the last few months. Some estimates have put the figure as high as 15,000 so far.

Reflecting the high level of sales, there has even been a book produced on the scanning scene. It is "Dick Smith's Australian Radio Frequency Handbook". As the accompanying photograph of the

book's cover shows, the reader is invited to "get into the exciting world of 'secret' radio with a scanner". It remains to be seen whether scanner purchasers decide that the generally prosaic conversations on the VHF and UHF bands are, in fact, exciting. In the meantime though, there appear to be parallels between the present burgeoning sales of scanners and the exploding sales of 23-channel Citizens' Band transceivers before these units became legitimate.

Eventually, the CB boom led to many people becoming more seriously interested in electronics and many have become Amateur Radio operators. Do scanners have the same potential to interest people in the wider fields of electronics? That remains to be seen.

HEAT WAVE


WE'VE ASSEMBLED A GREAT BUNCH OF SPECIALS AT "RED HOT" PRICES!!

FUEL SENSOR

GENUINE MORAY UNIT SACRIFICED!!

This is the original unit as used in the EA Car Computer (Ref: EA July/August 1982).

They were very scarce (and expensive!) — until now!! If you are assembling this project from parts you will need this unit. Remember! The Jaycar unit is the LATEST MODEL fresh from the U.K.

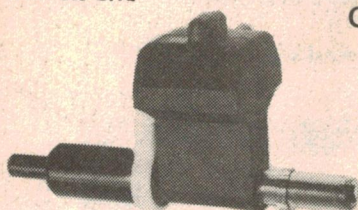

GREAT SAVINGS!!

ALMOST
30%
OFF

The Moray fuel flow sensor normally sells for up to \$69.50

You can buy the SAME ITEM from us for — wait for it \$49.50

THAT'S UP TO \$20 SAVING!!

Hurry! Quantities strictly limited

LCD panelmeters



DPM-05 **\$39.50** DPM-200 **\$49.50**

We have been unable to keep up with demand for these, that is why you have not seen them in our ads for the last few months.

DPM-200 — 3½ digit display with annunciators (pictured). 0.6" high. 200mV full scale. Each unit supplied with data sheet.

DPM-05 (Not illustrated). 3½ digit display with "plus", "minus" and "low batt". Annunciators with 0.5" readout. Both units sample at 3/second.

If you want to express any physical measurement in a bright easy to read display these are for you. They contain all analogue-to-digital electronics and LCD drive circuitry. Send SAE for more information.

"PANBRAKE"

SHEET METAL FOLDER

\$69.50



- Handles up to 16 gauge aluminium!
 - Slotted upper clamping bar allows complex corner bends etc.
 - Handles material up to 445mm wide!
- Save a fortune building metalwork yourself!!!
ONLY \$69.50

Now you can afford one in your own workshop. Make your own chassis, boxes, brackets etc. (Please allow \$8 for freight as it is very heavy!)



ELECTRET MIC
INSERTS

CRAZY PRICE!!


JANUARY ONLY — 2 FOR \$2.00

Each unit supplied with data sheet.
1000's of uses

SUPER SPECIAL

URGENT. WE HAVE SECURED A QUANTITY OF 240V. DISCO STROBES, NOT KITS. BUILT-IN WOODGRAIN CABINET. 0-12 FLASHES PER SECOND VARIABLE. BRAND NEW BUT REWORKED Q.C. CONTROLLED STOCK. ALMOST 1/3 OF NORMAL PRICE. . . NOW ONLY \$12.50 WERE \$36.50.

\$2
for
2




IF YOU THOUGHT MUFFS WERE SCARCE AT THE KLONDIKE. . .

you should see our stores!!

Yes, we have the Sennheiser HD414 earmuffs back in stock — for a while anyway.


Grab a muff now (you will get either blue or yellow — no choice) for \$5.95 per pair. (The high price reflects their quality Teutonic origin).



ONLY
\$5.95
per pair

Green Screen

MONITOR — NEW LOW PRICE!!
A BREAKTHROUGH!!!

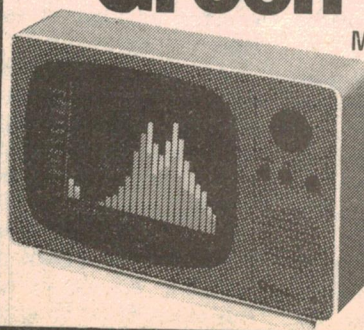

Now you can enjoy the benefits of high quality for less than the cost of some B/W monitors!
— 18MHz Bandwidth!!
— Direct Video Connection
— High Resolution

only \$199


SPECIALS

WE'VE ASSEMBLED A GREAT BUNCH OF SPECIALS AT "RED HOT" PRICES!!

final runout of GE Consumer Products

WE HAVE SOLD OVER 1000 OF EACH OF THESE ITEMS. ONLY A FEW ARE LEFT NOW.

Smoke Detector

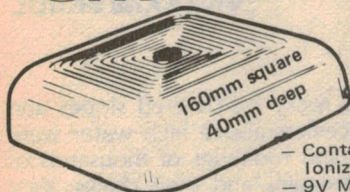

FROM \$12.50


- Contains Americium 241 Ionization Chamber
- 9V Mallory Duracell included
- Contains very loud solid state buzzer
- 12 month factory warranty.

One of the greatest consumer flops of the last decade was the Ionization Chamber Smoke Detector. Even though it is a brilliant product (reliable compact, easy installation, fail-safe etc) it just did not sell. Human nature being what it is finds safety-oriented products just not worth the investment. We all know that accidents and fires never happen to US!! As smoke is the greatest killer in a fire, the market research gurus thought that such a product would have a wide appeal. When they were \$49.50 no-one wanted them. The price fell to a very reasonable \$29.50 and still they stayed on the shelf. We have now been instructed to clear them for less than 1/2 of \$29.50.

Burglar Alarm

GENERAL ELECTRIC

BURGLAR ALARM SLASHED!!!
HUGE SCOOP PURCHASE -
ONCE SOLD FOR OVER \$100

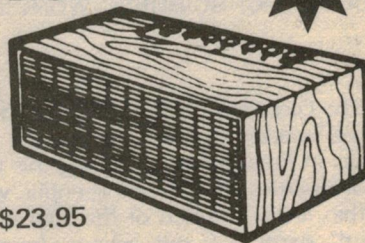

FROM \$23.95

Amazingly low price for a full feature ultrasonic proximity/burglar alarm. + Completely self contained + 12 month manufacturer guarantee + Instant or delayed alarm + Handsome imitation woodgrain + Cabinet measures 180(w)x85(h)x100(d)mm + Programmable multi-code disable switch + Single 9V Alkaline battery* lasts one year + unit beeps when battery gets low + Contains receiver element designed for greater sensitivity without false triggering + Uses state-of-the-art LSI circuitry + Worth the money in parts alone + Comprehensive 24 page manual included + Comes complete with 4 window deterrent stickers + Absolutely no installation needed * Battery extra.

QUANTITY PRICES

1-\$14.50: 2-5 \$13.50ea: 6-10 \$13.00ea: 10 up \$12.50ea

1-\$29.50: 2-5 \$25ea: 6-10 \$24.50ea: 10up \$23.95ea

4116 RAMs 150nS - GOING CHEAP

We have secured a quantity of 4116 (150nS) RAMs at a price which means great savings to you. Why are they cheap? Well they don't actually have '4116' branded on them. They have '9016 FPC' on their little backs. They are used in a well known TV game computer and this is the 'House Number' for their 4116. If you have ever had to buy a non-standard replacement part you will know that the 'House Number' part can be VERY expensive. We don't want to sell as 9016 FPC's we want to sell them as 4116's - and at a great price. The normal (i.e. lower than most) price for our 250nS 4116 is \$2.50. You can grab a 9016 FPC (150nS) 1-off for only \$1.95!!! For larger quantities see below:

This price includes sales tax!!



1-9 pcs \$1.95
10-24 pcs \$1.85
25-99 pcs \$1.75
100+ \$1.65

-1 Edgeconnectors * *

1-9 \$3.50 ea

10+ \$2.95 ea

Collectors special. Made by UECL of England. Sold in quantity for over \$10 each. Each Diallyl Phthalate moulded connector contains 170 heavily gold plated bifurcated contacts. (2x 85 way). Each contact is solder eyelet terminated. The connector is 217mm long but you can cut it down to any length you wish. Outstanding quality

AM/FM STEREO CAR CASSETTE

Unbelievably low price! (Pre Budget tax) That's right! An AM/FM Stereo Radio and Cassette!

- Features:
- * 2 x 7 watts * One lever operation (fast forward and eject) * Tape run indicator
 - * FM Stereo indicator * Auto stop * Adjustable pitch controls * Mounting hardware included.



STAGGERING \$
VALUE ONLY **69.50**

LOW COST WALKIE TALKIES

What can we say?

Both voice and morse transmission

ONLY

12.50
ea



POWERTRAN

TRANSCENDENT 2000

This is the famous UK designed single-board synthesiser from the UK kit experts POWERTRAN. Jaycar imported a kit and had it professionally built for evaluation. It works beautifully and is very well put together. We estimate that it cost us over \$700 including airfreight, duty, cost, customs and labour. We decided not to go ahead with an Australian version but we still have this beautiful prototype. You can have it for \$500 - No deals. Ring first to check to see if it has already been sold.

SAVE OVER \$200!!

S0-239

UHF PANEL SOCKET

1/2 Normal Price

\$1.20

1-9 75c
10+ 59c



Ref March 1982.

NEW LOW PRICE

This P.A. Module is chock full of high quality Jaycar goodies like, extruded jig drilled heatsink bracket, Beryllium Oxide washers etc. Were selling at \$79.50 but, despite inflation, despite sales tax now only \$69.50.

ETI 499 150W
MOSFET AMP
ONLY
\$69.50
SAVE
\$10!!



Jaycar NUMBER 1 FOR KITS

125 York Street, Sydney 2000
Phone: 264 6688 Telex: 72293
"Nevilles Corner"
Cnr. Carlingford & Pennant Hills Road,
Carlingford
Phone: 872 4422
Mail Orders To: Box K-39 Haymarket
Sydney 2000

POST AND PACKING CHARGES
\$5-\$9.99 (\$1.20) \$10-\$24.99 (\$2.40)
\$25-\$49.99 (\$3.50) \$50-\$99.99 (\$4.60)
\$100 up (\$6.20)

NEW SHOP HOURS
Mon-Fri 8.30 to 5.30pm
Sat 8.30 to 12.00pm
Thurs night to 8.30pm

MAIL ORDER BY
BANKCARD VIA
YOUR PHONE



Expedition to the Antarctic — Pt 2

Last month we told the first part of the story of the "Dick Smith Explorer" expedition to the Antarctic in commemoration of the Mawson expedition of 1912. Part two continues the tale with an account of scientific work in the area and the voyage home.

by **DON RICHARDS**
VK2VXM/VK0DL

"The Dick Smith Explorer" spent almost three weeks moored to land-ice and rocks in Boat Harbour. During this time shore parties carried out scientific work within a day's march of the ship and a "bird" party was put ashore, from inflatable boats, on the Mackellar group of islands, where they stayed for several days amongst the penguins.

Within a few hundred yards of the boat, on land there were signs of previous human inhabitants. Foremost was Mawson's hut, at the head of the bay; two large joined huts, at the foot of a slope, strongly built in Baltic Pine during the short summer of 1912. It was from here that Mawson left with his two companions, Ninnis and Mertz, to explore the continent to the east during a

three month sledge trip, a trek from which Mawson alone returned, his companions and dogs dead in the ice and snow.

Mawson's party erected several smaller huts for scientific observations and these were still standing. And above the harbour stands a wooden cross, erected to the memory of Ninnis and Mertz who gave their lives in the cause of science.

On the slope opposite stands a modern hut erected by ANARE (Australian National Antarctic Research Expeditions) that housed a group of four people in 1978 for several weeks whilst they examined and reported on the work necessary to restore Mawson's hut. We had been given permission to use this hut during our stay.

On the rocky ice-covered slopes and on the ice-flats above high water were colonies and rookeries of thousands of Adelie Penguins and their chicks; they croaked and squarked and flapped their wings and turned their backs to the freezing gales and blizzards that sweep down from the interior of the ice-covered continent.

Our communications changed whilst moored, in accordance with our changed activities. Walkie-talkies were taken each time a party went ashore for more than a few hours and by parties staying in the ANARE hut. The party taken by boats to the Mackellar Islands maintained contact by walkie-talkie and were alerted to bad weather or warned to prepare to be taken off. This type of communication is essential to reduce the risk caused by a change in the weather — which can happen in seconds. The general coverage of the FT-ONE was particularly useful for such contacts.

Now that the sails were down and the booms lashed I had space for a wire antenna, so I cut a dipole for 14.105MHz and rigged it from the mizzen to the inner end of the main boom. This gave it an angle of about 30° to the vertical. I also brought out the TS820S and set it up on the chart table which was no longer in use. Connections to the Tono RTTY were checked and leads repaired.

Our daily schedules contained some interesting traffic. Not only was there more to talk about but we also received a stream of congratulatory messages from many quarters. The Minister for Science and Technology exchanged messages with Dr David Lewis, as did Lord Shackleton and Dr Harry Edwards, MP.

Teletype communication was set up with VK2APQ, this mode suiting our circumstances very well. Not only was it "easy on the ears" but as Barbara could touch-type, the many personal and family messages could be passed quickly and accurately. Malcolm and Barbara often



A view of Mawson's hut, looking south. Entrance is by a tunnel in the ice. All photographs in this article were taken by the author.

took on the job of second operator, which was most welcome if I wanted a spell or was preparing for a commercial schedule.

The Mawson expedition

The expedition organized and led by Douglas Mawson in 1911-1913 is rated by Antarctic historians as the best equipped and scientifically successful of the pre-World War I era. Mawson, a geologist and engineer, was the first to make effective use of radio communication for control and expedition news. He also realised the problems of Antarctic communication and set up a relay station on Macquarie Island. He carried electric generators, a well equipped workshop and an aircraft. The expedition members included Frank Hurly, a professional photographer of great skill and fortitude.

The expedition story is told in Mawson's book "The Home of the Blizzard" (Rigby) and later, by Lennard Bickel in "This Accursed Land" (Macmillan of Australia).

Permission had been given for us to enter Mawson's hut but we were not to move any of the things inside it. From the outside every passage way, doorway or opening seemed blocked with ice but an entry was dug through a narrow tunnel, just wide and high enough to push yourself along on elbows and knees — very cold, dark and wet! Inside, it was more than half full of ice. Ice hung from the ceiling and the roof beams were splintering under its weight. The workshop and observatory were almost impenetrable but a small section of the main hut was clear, as was Mawson's cubicle.

Around the walls were the bunks, two high, of the party members with their names carved or burnt into the wood. Shelves crammed with jars of food and medicines (mostly based on opium) — Mawson's bunk and chair — old magazines, telling of the sinking of the Titanic, and Sherlock Holmes novels, apparently preferred Antarctic reading. It all looked as though it had been left in a hurry when the relief ship appeared and the ship's boats could get to the shore to take off the seven men after that long second winter.

I brought the Honda generator across from the ANARE hut and took a 240V lead in through the roof so Malcolm could get light for his documentary shots. Eventually, we closed up some of the splits in the roof and replaced shingles. Then we closed the hut and left it until the Australian government can decide what to do with this national monument.

The next leg of the voyage was to the Mertz Glacier about 60 nautical miles to the east. The expedition geologist, Dr



Inside the Mawson expedition's hut thick ice hangs from the roof beams.



The author inspects the cubicle in which Mawson worked.

Harry Keys, was to conduct iceberg studies, plot the tongue of the glacier and, if possible, locate the tip of the tongue.

Gales at the glacier

Here gales held our vessel against the glacier tongue for two days, ice floes and icebergs threatening to trap the "Explorer" and crush her against the ice cliffs. It was here also that the stern helical antenna was ripped off by a passing ice floe, as if to give warning of the true danger of the situation.

At the first break in the weather a lookout went to the crows nest and we set about finding a way out. About 12

hours later the vessel was in fairly open water and making for the French base at Dumont D'Urville. French champagne and steaming hot showers were the conversation topic en route but, in the event, it was water rationing and Australian Riesling. However, the hospitality and help given us by the French, and the secure mooring provided, compensated for both the shortage of water and the lack of bubbles!

The opportunity to go ashore into comfortable surroundings, enjoy the company of a group of young, friendly people, eat in a dining room, and sleep in a stable bed for a few nights was a wonderful change and a welcome

DICK SMITH



NEW ZEALAND

**PRO.
SIZED
COMPUTER YOU
BUILD YOURSELF
& SAVE**

The DICK SMITH SUPER 80

A professional sized computer you build yourself — you are supplied with everything : including power-on EPROM monitor, 16K of RAM, cassette interface (relay activated), power supply including transformer, TV modulator and direct video output **PLUS** full size professional keyboard — not a 'feel less' toy!

- RAM expansion up to 48 K on board
- S-100 expansion on board
- Room for further development on board
- Keyboard mounted on board — or fully detachable

OVER 2000 SOLD!

AMAZING VALUE **\$445⁰⁰** NZ

SUPER 80 ACCESSORIES

BASIC Interpreter (tape) (K-3602)	NOW
WAS \$29.90	SAVE ALMOST 50% ... \$14⁵⁰
Basic in EPROM (K-3604)	
WAS \$120	SAVE \$40 NOW ... \$79⁵⁰
IC Socket Set (K-3603)	\$18⁵⁰
Lower Case Generator Option (K-3607)	\$79⁵⁰
S-100 Expansion Unit (K-3606)	\$29⁷⁵
Metal Case (H-3200)	\$59⁵⁰
Debug/Disassembler for Super 80 (X-3790)	\$49⁹⁵
Editor-Assembler for Super 80 (X-3791)	\$49⁹⁵

SUPER 80 MANUALS NEW

NEW SUPER 80 PROGRAMS
16 programs written especially for the Super 80 by enthusiasts like yourself. (B-3606) **\$7⁹⁰** NZ

SUPER 80 TECHNICAL
All the information of the 'works' available for all Super 80 builders. (B-3600) **\$13⁹⁵** NZ

SUPER 80 BASIC
Easy to understand — fully explains BASIC used in Super 80 — you can actually write your own programs! (B-3602) **\$13⁹⁵** NZ



The amazing DICK SMITH WIZZARD

A home computer that goes far beyond anything you've seen before. The design is absolutely the very latest in technology. With a huge 12K BASIC interpreter — as much (or more than) most other microcomputers around!



LOOK AT THESE FEATURES

- Outstanding picture quality : Resolution (49,128 pixels) is far greater than most other machines.
- Connects to your **standard** TV set (colour or b&w) — no need to buy an expensive monitor. You just plug it in!
- Sound effects with 4 different sound outlets.
- Hand controllers with 24 separate keys (as well as the NASA-type joystick controller). Splash-proof keyboard with slide-in overlays.

Who could ask for more? Collect your free brochure and be amazed!
— FIRST SHIPMENT SELLING FAST!

**ALL THIS
ONLY**

\$495 NZ
Cat X-1600

**BE
QUICK
MODELLERS
LOOK AT
THIS VALUE!**

4Ch DIGITAL PROPORTIONAL REMOTE CONTROL

HERE AT LAST — life for your model boats, tanks, cars, planes — everything that will take a radio control!

Cat Y-1240

Beware of inferior units which are not true digital proportional

\$279 NZ



LESS THAN HALF PRICE! PEN WATCH

A superbly styled ball-point pen complete with an LCD digital clock right inside the pen — shows day, date and seconds, too! Takes standard Parker refills.
Cat. Y-1030 **\$9⁵⁰** NZ **\$19⁵⁰**

NIBBLING TOOL

Can cut any shape in sheet steel up to 0.6 mm thick or light alloy to 1.5 mm. Great for plastics too!
Cat T-4600 **\$15⁹⁵**



**STOP PRESS
INCREDIBLE
SAVING
ON THE DICK SMITH
BLUE LABEL SYSTEM 80
COMPUTER
WAS NOW ~~\$1295~~ **\$995** ~~\$300!~~
x4005**

DICK SMITH Electronics
98 Carlton Gore Rd.
Newmarket,
Auckland 1.
Ph: 504 409

POST & PACKAGE CHARGES

ORDER VALUE	
\$5 — \$9.99	\$1.00
\$10 — \$24.99	\$2.00
\$25 — \$49.99	\$3.00
\$50 — \$99.99	\$4.00
\$100 or more	\$5.00

Mail Orders: Private Bag, NEWMARKET



DSE/A388M/LM

Shop by phone
Use your Bankcard
Or Visa card

Expedition to the Antarctic

preparation for the long voyage home. The scientists on board were able to carry out ice studies and biological studies at the one time so we made up for the days lost at the Mertz glacier.

Daily schedules went on as usual, one of particular interest being with an English expedition en route to the North Pole. This was arranged by Harry Caldecott, VK2DA, and through his efforts we made contact with Ric, VE8RCS at Alert, a weather station on Ellesmere Island, north of the Canadian Continent. Alert is the most northerly settlement in the world, at a latitude of 84°. Sir Ran Finnes, a British explorer, was leaving on an ice traverse to the North Pole and Jeni and Paul talked with Lady Virginia Finnes who was known to them from previous expeditions.

The voyage home

The weather was getting colder, the blizzards were more frequent and the sea water around the boat was starting to freeze. On Saturday, February 22, a break in the weather occurred so we took up the mooring lines and motored slowly through the narrow pass that led to open water – which by now was anything but “open”. Icebergs, brash ice, and ice floes were all around and it was an anxious two or three days before we were clear.

I had changed the dipole from the main to the mizzen mast as the mizzen sail would probably not be used on the way home. I had also decided to mount the TS820S for the return voyage and use the Sony 2001 receiver for cross-band reception from the Australian bases. This meant the FT-ONE had to be taken out of action, which I did with reluctance because its general coverage receiver had given excellent results.


I should mention that the Australian bases are issued with their own frequencies for inter-base communication. To work them, which I did almost every day for weather and ice reports and to give our position, it is necessary to receive on their transmit frequency using a general coverage receiver. They, in turn, receive our crystal controlled signal by similar means. The little Sony did this job well, keeping us in daily touch with the bases until I could work Hobart Radio using full crystal-locked transmit and receive.

During the return trip I had the opportunity to contact stations that had not been on the daily net, two interesting QSO's being with Frank VK9NYG on Cocos Keeling and Bob VK9NND on Norfolk. At other times I moved to 40 metres to keep in touch with Tasmanian amateurs and soon we were able to work Sydney on 40 metres which we did

all the way up the NSW coast, both morning and evening.

“The Dick Smith Explorer” entered Sydney Heads on March 16 and anchored in Watsons Bay for customs and immigration. Pierce brought a 2-metre pack on board and talked us up the harbour as he drove by car to our berth at Circular Quay.

The path of the Explorer

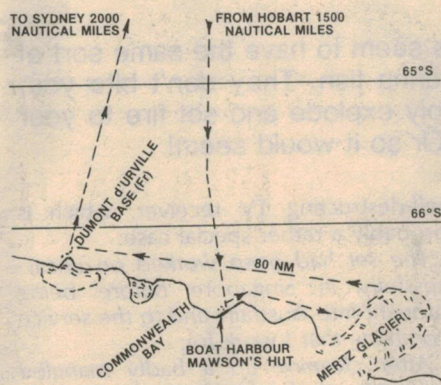

During the course of the Oceanic Foundation Antarctic Research Expedition the “Dick Smith Explorer” covered 3600 nautical miles. First land-fall was Boat Harbour, in Commonwealth Bay, the site from which Mawson's historic expedition set out 50 years ago. The expedition also made a study of the Mertz Glacier and visited the French station at Dumont d'Urville before returning to Sydney. The journey occupied a total of almost three months.

Lessons learned

During the expedition of almost 100 days we were able to contact Australian or New Zealand amateurs on all but three occasions: twice due to solar flares and resultant ionospheric disturbance, and once due to low battery power. Contact was most usually on phone, but RTTY proved very reliable and convenient. I used CW twice when neither phone nor RTTY could get through, but it was amazing how well a weak RTTY signal would print.

Contacts were made with 110 amateur stations, covering Canada, Ireland, the USA, Pacific Islands, the Indian Ocean and Antarctica. Two amateur “firsts” are claimed – contact between an Arctic and an Antarctic expedition, and RTTY contact between a yacht at sea in Antarctica and an Australian station.

Our experience confirmed previous findings that a wire dipole on a yacht is a very effective antenna for long distance communication, the broad-band helical

giving good results on 40 and 80 metres over shorter distances. Amateur operation has many advantages over commercial – for example, ease of changing frequency, range of frequencies available, useful receiver and transmitter features such as speech processing, RIT, IF shift, etc.

Commercial yacht equipment is required to be simple and rugged and capable of being operated by a relatively unskilled person. However, for the conditions we experienced, the amateur gear should be easy to operate. Gloved fingers do not cope readily with small co-axial knobs on a crowded panel, for example.

The 20 metre band provided good communication most hours of the 24, but was affected by solar blackouts as badly as all other bands. Frequencies above 20 metres were not useful and I could not get consistent results on 10 or 15 metres day or night using tuned wire or helical. Operating at times was difficult due to the low temperature and the motion of the boat. Also, standing up to operate for several hours at a time is hard on the feet!

So perhaps, out of that, come some suggestions for future maritime amateurs in the Antarctic!

Altogether, the expedition was a most interesting and enjoyable experience. I am amazed by the number of people who, since my return, have commented on how much they enjoyed being “with us” and I was always pleased to hear a new station come up in the net and say that he listened regularly to our messages and couldn't resist a contact. The interest and good fellowship generated by a well-run net relieved the frustrations that sometimes occurred when passing detailed messages under difficult conditions.

The benefits arising from the crew being able to talk with friends and family cannot be over-estimated, particularly when life is difficult or dangerous. All crew members drew strength from such contacts. The safety of the expedition was enhanced by the fact that the vessel's latitude and longitude were always known “at home” and this was reflected in crew morale.

I spoke with operators at the Australian bases almost every day. They were professional, friendly, helpful, patient – and always busy! The same comments apply to the operators at the ship-to-shore bases in Hobart, Adelaide, Melbourne and Sydney.

My thanks to all who participated and gave encouragement and assistance to us!



FORUM

Conducted by Neville Williams

Where there's smoke, there's a TV set — perhaps!

Self-destructing television receivers seem to have the same sort of fascination as rattlesnakes and piranha fish. They don't bite you, they don't consume you; they simply explode and set fire to your home at the slightest provocation. Or so it would seem!

Back in September, last, we ran an instalment of "Forum" with the heading: "TV receivers still catch fire — occasionally!". I mentioned in the introduction that, for a topic that by then should have been dead, "it exhibits a remarkable disinclination to lie down."

The remark still applies. The issue had been on sale only a few days when a reader posted to me a copy of the "Manly Daily" (Sydney) for September 11, 1982. The lead headline on page 1 proclaimed in bold type "Woman dies after TV fire wrecks home".

The story beneath the heading told how neighbours had noticed a fire in the elderly woman's home and had smashed their way in to find her unconscious. The lounge was on fire and one neighbour is quoted as suggesting that the lady, who died before reaching hospital, could have gone to sleep while watching television.

CAUSE OF FIRE?

Of the fire itself, the report said:

"Two large holes were found in the lounge room where fire had burned through flooring.

"One was thought to have been started by a cigarette and the other when a television set caught fire."

The reader who sent in the cutting asked simply and rather pointedly: "Based on the story, as published, wouldn't it have been just as pertinent to headline it another way?

"Woman dies after cigarette fire wrecks home".

It might even have caused a few people to question the safety of cigarettes, rather than of TV receivers!

Another letter came to hand from about as far away, in Australia, as one could get from Manly, NSW — from Berrimah, Northern Territory. It refers to a

self-destructing TV receiver, which is probably a rather special case:

The set had been worked on unsuccessfully in Singapore before being brought into Australia and to the service company that I work for.

After cleaning up a badly mangled soldering job that had been done on the power supply board, and checking a few components, I tried it but nothing fired up. Further checking showed a faulty regulator transistor, which was replaced.

At the next switch-on, the power supply fired up but, about a second later, there was an almighty explosion as a 160V electro on the 130V line destroyed itself. Pieces of the capacitor lodged firmly in the wiring harness — a half-inch round bundle of plastic coated wires and burned quite intensely in about three different areas, with flames about two to three inches long.

I managed to blow the flames out. If the set hadn't been on the workbench, with the back off and someone on the spot, it would soon have been engulfed, with wooden case, plastic panels and wiring, and the picture tube exploding as well.

There wasn't enough left of the capacitor to determine if it had been put in the right way round but I guess that exploding electros could explain some of the situations talked about in your column.

We never did fix the set; scrapped it instead!

K. C. (Berrimah, N.T.)

Yes, K.C., I agree that there is evidence to suggest that exploding capacitors could be responsible for some of the traumas but there are at least two reasons why the case you refer to could have been non-typical.

One you have already mentioned: the possibility that the electro may have been wired in back-to-front — causing

the demise of the regulator transistor. The next time around, the transistor won't!

The other is that the receiver could have been designed for, or set for, a 220V mains supply. If connected to Australian mains, particularly during a period of over-voltage, the components could be subjected to considerable voltage stress.

MAINS VOLTAGE

This is one of the practical hazards of bringing in electronic equipment, bought over the counter in foreign cities. Whereas imports through normal channels are designed to cope with supply voltages of 240-plus, many near-equivalent models overseas are fitted with a switchable 110/220V mains transformer — seemingly near enough but not good enough for Australian conditions!

As a matter of interest, I have on my desk at the moment a table of standards and voltages from the British "Television" magazine. Of the many countries using the PAL system of colour television, most of them are shown as having 220V supply mains.

So there's ample reason for jetset bargain hunters to be careful!

The problem of high voltages is most commonly identified with Western Australia, where 260V is regarded as normal, by reason of the generation/reticulation equipment. However, according to a South Australian reader there are also problem areas in that state. I quote:

Some years ago, we were connected to the SWER — Single Wire Earth Return, with 19000V delivered to a transformer at the door. Voltages of 270 were not uncommon at the time. They were hard on light globes but using 250V rather than 240V globes eased things somewhat.

Talking to an ETSA technician one day, he said that their aim was to maintain 250V but voltage drop on some lines

made higher voltages at the source end necessary, with higher voltages to the consumer if the line drop was less, at a given time, than anticipated.

Later installation of automatic switching transformers, suitably sited on heavily loaded lines, levelled this out.

Another electrician made an interesting point. He said that a long power line system can show an excessive voltage rise as it nears a resonant length, similar to an RF transmitting aerial. In fact, he said, measures are taken to keep the rise down.

With all of agricultural South Australia and much of the inner pastoral area now covered by SWER, there are some very long lines around!

R. B. (Quorn, S.A.).

The same reader comments on the tendency for Fire Brigade personnel to favour turning off appliances at the wall switch and even removing the plug from the socket when an appliance is not in use.

He says that, in older houses, there is no standard in regard to the wiring of power points and mains plugs, with the result that "there is a 50% chance that the appliance switch is in the neutral line, leaving the works live and looking for a stray path to earth."

By way of example he quotes the case of some friends who returned from a holiday to find that there had been an electrical breakdown in the washing machine. A fire had occurred but, for-

tunately, it had not spread. The washing machine was turned off but the wall switch was still on.

These days, most appliance switches should be of the double-pole type, interrupting power to the internal "works" of the appliance, irrespective of the supply wiring. However, there are probably a fair number of older appliances and gadgets around which still rely on a single-pole switch and there is always the possibility that the switch itself may fail, as per the September '82 "Forum".

SUPER PESSIMIST?

Another advocate for unplugging electronic equipment, when not in use, is an electrical engineer from Cairns in Queensland — emphasising the widespread nature of the discussion:

If you live in an area serviced by overhead electricity mains, there is a risk of damage by voltage surges during thunderstorms. Admittedly the risk is small but why increase it by leaving equipment plugged in when it is not necessary?

There is also a chance (again small but unfortunately on the increase) that a car will collide with a pole carrying both high voltage and low voltage cables, with the result that they touch. The time taken for the high voltage breakers to trip, back at the substation, is much too long to save solid state devices.

H. H. (Cairns, Qld).

FRENCH TELEVISION: Key dates


Turning back the clock, or rather the calendar, L. McD of Yeppoon, Qld, came across some information on French television in a copy of "Practical Television" magazine dated October, 1952. He recalled having seen another reader's question on the subject in an old issue of EA (November, 1980, page 25).

"Practical Television" pinpoints the following dates, which may be of interest:

- 1937:** The first regular French TV transmissions commence using a temporary transmitter installed in the 985ft Eiffel Tower. Transmission standard 455 lines.
- 1938:** Permanent equipment installed in the tower, fed by cable from three studios in Cognacq-Jay, Paris and an associated mobile unit. (Transmission was discontinued during the war).
- 1944:** Transmission resumes on October 1, after wartime shut-down.
- 1948:** French Authorities decide to adopt a higher definition system using 819 lines, but to maintain the low definition system for 10 years to service existing receivers.
- 1949:** Low definition system readjusted to 441 lines. (It was later abandoned when fire destroyed the installation in the Eiffel Tower).
- 1950:** A high definition service opens in Lille in September.
- 1951:** High definition transmissions commence from the Eiffel Tower in May. Picture carrier 185.25MHz (3kW), sound carrier 171.1MHz (700W), both horizontally polarised.

THE PRESENT: The principal service is 625-line SECAM colour, with 819 lines regarded as an obsolescent monochrome system.

MICROPROCESSORS AND PERSONAL COMPUTERS

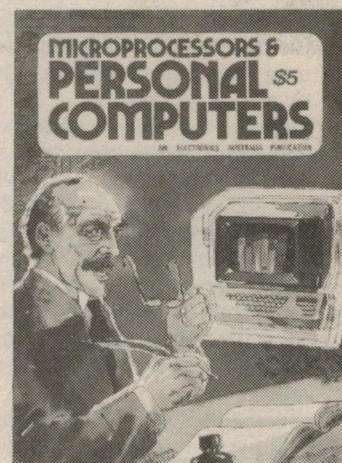

Microprocessors and personal computers, little more than a dream a few years ago, are now changing the face of electronics. This book introduces the basic concepts, describes a selection of microprocessor and personal computer systems, and details a build-it-yourself computer designed especially for beginners.

HERE ARE THE CONTENTS:

PERSONAL COMPUTERS: TANDY ELECTRONICS TRS-80 PERSONAL COMPUTER, EXIDY SORCERER PERSONAL COMPUTER SYSTEM, HEATH H8 HOME COMPUTER SYSTEM, HEATH H11 16-BIT MINICOMPUTER KIT, COMPCOLOR II PERSONAL COMPUTER SYSTEM.

MISCELLANEOUS EQUIPMENT: E & M ELECTRONICS CASSETTE INTERFACE KIT, PARATRONICS MODEL 100A LOGIC ANALYSER, PARATRONICS MODEL 10 TRIGGER EXPANDER, LEAR SIEGLER ADM-3 VIDEO TERMINAL KIT, TAPE READER KIT FOR HOBBY COMPUTERS, SIGNETICS INSTRUCTOR 50 TRAINING SYSTEM.

DREAM 6800 COMPUTER: INTRODUCTION TO THE DREAM 6800, BUILDING THE DREAM 6800 COMPUTER, INTERESTING PROGRAMS FOR THE DREAM 6800, CHIP-8 PROGRAMMING FOR THE DREAM 6800, DREAM 6800 POWER SUPPLY.

GENERAL: THE PERSONAL COMPUTER REVOLUTION, MICROPROCESSORS: THE BASIC CONCEPTS, PLOT BIORHYTHMS WITH YOUR TRS-80, UNDERSTANDING BASIC PT 1, UNDERSTANDING BASIC PT 2, GIVE YOUR COMPUTER AN RS-232C INTERFACE.

MICROPROCESSORS: INTEL 8080A & SDK-80 EVALUATION KIT, INTEL 8085 & SDK-85 SYSTEM DESIGN KIT, MOTOROLA 6800 & MEK6800D2 EVALUATION KIT, MOTOROLA 6802D3 EVALUATION KIT, NATIONAL SEMICONDUCTOR SC/MP CHIP & EVALUATION KIT, SIGNETICS 2650 CHIP & EVALUATION SYSTEMS, FAIRCHILD F8 & F8 DESIGN EVALUATION KIT, MOSTEK F8 & MOSTEK EVALUATION KIT, SIGNETICS 8X300 & EVALUATION KIT, NATIONAL SEMICONDUCTOR PACE & DEVELOPMENT SYSTEM, TEXAS INSTRUMENTS TM990/189 TRAINING SYSTEM.

Available from "Electronics Australia", 57 Regent St, Chippendale, NSW. **PRICE \$5.00** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. **PRICE \$5.90.**

Back to the Sydney area, another electrical engineer (E. R. of Earlwood) debates the findings of the serviceman who was quoted in the September '82 "Forum". He had concluded that the fault in the particular TV receiver had occurred in the most damaged part of the set, the double-pole on-off switch. In so doing, he may have dismissed too lightly, the possible role of the fuses.

E. R. maintains that fuses operate with the least trauma when they are subjected to a moderate overload. When they are faced with a high current short across a high voltage, well regulated supply, they can rupture and track in a way that can set up an arc between the fuse connections. Thus, damage may concentrate around the fuse area, even though the fault may be a short in a remote part of the wiring.

I have seen this sort of thing happen with DC power mains, as in pre-war downtown Sydney, but never with AC mains. In any case, I doubt that it could have happened in the TV fire discussed in the September '82 issue, because the fuses were presumably isolated from the mains by the double-pole switch.

E. R. also expresses apprehension about TV receivers with "instant picture" circuitry, but that would be the least of our problems, if problem it is. As I pointed out in the September issue, the average modern home is thick with gadgets that are normally left plugged into live power points and are turned on and off by their own switches.

And, with the proliferation of devices with in-built clocks and timers, some of the circuitry is never turned off!

Included in that last category is a round half-million VCRs which spend their idle hours in the "Standby" position, maintaining the clock and timer and the TV antenna splitter/amplifier.


Perhaps we should be talking about the relative safety of modern electronic equipment, at least as normally marketed in Australia!

MICROPHONE MADNESS?

Visitors to stall 206, hall 2 of the "Fera" Fair in Zurich, Switzerland, could have been excused for believing that an attendant at the AKG display had suddenly flipped.

He had picked up one of the demonstration microphones, which was coupled to an active amplifier and had hurled it at a pile of rocks that just happened to be in the middle of the display area.

The amplifier protested loudly and the onlookers cringed, but the AKG attendant casually picked up the mic and repeated the Swiss equivalent of "Testing, testing, one, two, three..."

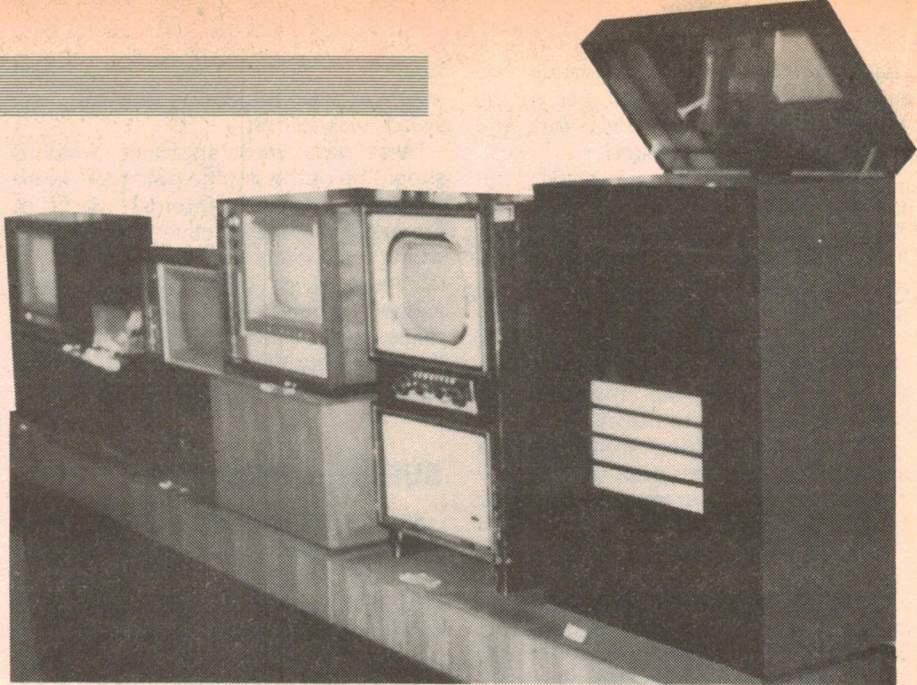

A line-up of historic television receivers at the Matsushita company museum in Osaka, Japan. In the model on the right, the picture is viewed via a 45-degree mirror beneath the lift-up lid.

And now, thirty years later . . .

In the same 1952 issue of "Practical Television", which gave details of the French system, there is an announcement of the establishment of television broadcasting in Japan.

It says that, after months of inquiry and consideration, the Radio Regulatory Commission granted a provisional licence to a private company, the Japan Television Broadcasting Company described as "a £2,000,000 amalgamation of three leading newspapers and three film companies."

The report goes on to say that "many newspapers express approval that private enterprise was entrusted with the initial start of television in Japan, rather than allowing it to become a state monopoly of the Japan Broadcasting Corporation."

Target date for the commencement of the service is the spring of 1953, with the Japanese Ministry of International Trade and Industry readying to help manufacturers get started in receiver production . . . "with 10,000 receivers off the line by March next".

Major producers of TV receivers would be Japan Electric, Tokyo Shibaura Electric, Matsushita Electric, and Mitsubishi Electric. Estimates put the cost of receivers at £150 for a 12in screen and £130 for a 7in screen . . . "prices which will certainly not lead to widespread use, as they are prohibitive for the bulk of the population".

But R. F. Tiltman, who wrote the article was less pessimistic: "If the present ambitious plans mature . . . there is every possibility of Japan entering the electronic field and making a determined bid for world markets in this modern industry."

Now, a mere 30 years later . . .

The thing still worked, so he hurled it at the rock pile again, and again . . . Finally, he handed the microphone to the spectators and invited them to have a go.

Mind, you, the microphone concerned was no ordinary model. It was AKG's D 330 BT stage model, advertised by the makers as being "the world's toughest stage microphone."

Being manhandled and dropped by Abba, Frank Zappa, Police, Manhattan Transfer was one thing, however. Being hurled against a pile of (non) rolling stones was something else!

Next day, a couple of soccer players

show up and repeatedly boot the mic viciously against the rocks. More ear-splitting protest comes from the amplifier but still the 330 BT survives: "Testing, testing . . . one, two, three . . ."

Three days after the show opened, after countless drops, throws and kicks, the mic finally succumbs: the connector has broken and the shaft is too bent to allow another one to be fitted. But the transducer inside is still functional.

The above story came to us via AWA but they didn't invite us to come out and play missiles with an AKG mic in Paramatta Rd, Ashfield!

NOW OPEN AT 48-50 A'BECKETT STREET, MELBOURNE




C. Itoh PRINTERS

FROM ROD IRVING ELECTRONICS

THE
PRINTER
PEOPLE

WE NOW HAVE 2 LOCATIONS IN MELBOURNE!!!!

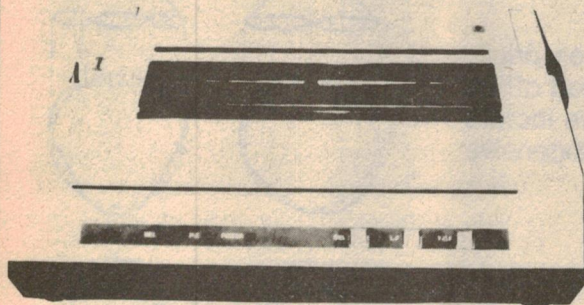

Pro/Writer Printer 8510

Print Features: Number of columns—136 col. max. Print Speed—120 CPS. Print Direction—Single-directional and Bidirectional, Switch Selectable. Throughput Speed—From 44 to 152 lpm. Character spacing (max. number of columns per line)—Pica 10 CPI (80), Double Width 5 CPI (40), Compressed Font 17 CPI (136), Double Width 8.5 CPI (68), Elite 12 CPI (96), Double Width 6 CPI (48), Proportional Double Width Proportional. Line Spacing—Variable to 1/144". Print Width—203 mm (8") max.

Forms Type: Fan Fold Roll or Cut Sheet: Width—113 mm to 254 mm (4.5" to 10.0"). Total Thickness—0.05 to 0.28 mm (0.002" to 0.011"). Number of Copies—Original + 3 copies nominal.

Form Feed: Method—Tractor or Friction. Form Loading—Either rear or top.

Interface—Serial: Method—EIA RS232-C and 20mA (40 & 60mA switchable option)

Current Loop Serial Interface. Baud Rate (BPS)—110, 300, 600, 1200, 2400, 4800, 9600.

Transmitting Method—Half Duplex. Synchronization—Asynchronous.

Interface—Parallel: Method—TTL compatible, 7-bit, parallel interface. Control Signals—ACK, BUSY, SELECT, DATA STB, INPUT PRIME FAULT, INPUT BUSY, PAPER EMPTY.


Instruction Codes—(ASCII): CR, LF, VT, FF, CAN, SO, SI, DEL, DC1, DC2, DC3, DC4, GS, RS, US, FS, EM; GRAPHIC SYMBOLS: BIT GRAPHICS.

Error Detection: (1) Parity (VRC)—Odd, Even, No-parity. Switch selectable. (2) Framing Error—Stop bit check. (3) Overrun Error—Error is detected when data are received before the previous data have been processed.

Physical dimensions: 398 mm W x 120 mm H x 285 mm D (15.7" W x 4.7" H x 11.2" D). Weight: 8.5 kg (18 lbs., 12 oz.)

P* \$795 (\$725 ex)

S** \$845 (\$775 ex)

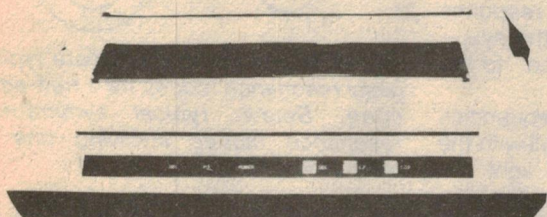

Model 1550

The Model 1550 is a compact desk-top dot matrix serial impact printer used for data communication terminals, hardcopy of CRT displays, peripheral terminals for minicomputers and microcomputers, and small-sized business systems.


The character format is a dot matrix of 7(H) x 9(V). or 8(H) x 8(V).

Print speed is 120 characters/second. Up to 136 characters can be printed per line at 10 CPI.

Its main features are: • Compact desk-top dot matrix printer • 136-column print • Lightweight • Low power-consumption • High-quality print • Bit image graphics • Graphic Symbols • Prints in six different languages • High reliability • Low cost.

P* \$1225 (\$1050 ex)

S** \$1275 (\$1195 ex)

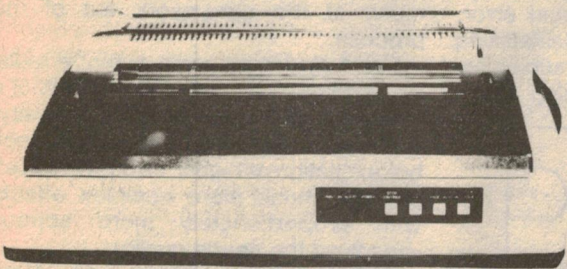

F-10 Printmaster Daisy Wheel Printer

Print Speed: 40 CPS. **Print Method:** Static Print Impact. **Number of Printable Columns:** 136, 163, Variable. **Character Spacing:** 1/120 Inch (minimum). **Line Spacing:** 1/48.

Return Time: 900 msec. **Line Feed Time:** 40 msec. **Paper Width:** 406 mm (maximum).

Print Characters: 96. **Printwheel:** Industry Standard 96 Character Wheel. **Interface:**

Industry Standard 8-bit Parallel, RS232-C Compatible, X-ON, X-OFF, 12-bit Qume and Diablo Compatible. **Dimensions:** 574 mm W x 405 mm d x 153.5 mm H (22.5" W x 15.9" D x 6" H). **Weight:** 14 kg (30.8 lbs.) with cover and power supply. **Noise:** Less than 65 Db (1M from Platen, A Scale).

P* \$1850 (\$1600 ex)

S** \$1925 (1675 ex)

* Parallel Interface ** Serial Interface

Extra Special Microline 80
\$499 incl. tax \$435 tax exempt

RITRONICS WHOLESALE


425 HIGH STREET, NORTHCOTE 3070. MELBOURNE (03) 489 8131.

48-50 A'BECKETT STREET, MELBOURNE. 3000

TO ORDER: Heavy items sent Comet Freight on Mail Order Phone 481 1436. Wholesale Customers Phone: 489 7099. Mail Orders to RITRONICS WHOLESALE, P.O. Box 235, Northcote 3070. Telex No. AA38897. Minimum P&P \$2. Add extra for heavy items, registration and certified mail. Prices and specifications subject to change without notice.

CALL IN AND SEE US IN THE CITY YOU WILL BE
PLEASANTLY SURPRISED

Bankcard mail orders welcome
ORDER FORM
Please Debit my Bankcard
No.
Expiry Date
Name
Signature

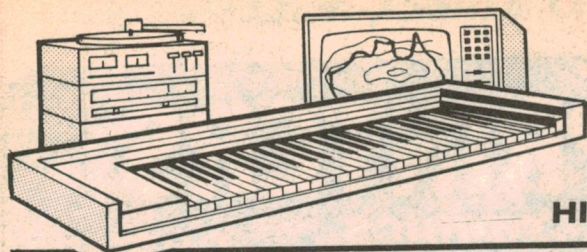

Audio-video Electronics

HIFI • HOME VIDEO • PROFESSIONAL AUDIO

LOUDSPEAKERS: Laser test equipment does away with the guesswork.

Time was when the design of a loudspeaker was based on price, precedent, theory, gut-feeling and listening tests — rounded off by a limited amount of measurement. Nowadays, the subjective factors are greatly diminished in importance, in the face of more extensive and more precise measurement of actual performance.

by GEORGE TILLET

It has been known for years that loudspeaker diaphragms vibrate in nodes and anti-nodes, depending on their structure, their dimensions and the frequency at which they are excited.

Back in 1787, long before loudspeaker cones existed as such, Chladni published his "The Theori des Klanges", which described how the notes from an organ could vibrate flat diaphragms and form intriguing patterns in sand sprinkled over them. In later years, until quite recently in fact, lycopodium powder was used to make these "Chladni Patterns" in experiments performed in school labs for the edification of students.

Designers of loudspeakers have to contend with these nodes and anti-nodes, these "Chladni Patterns", these

cone "break-up" patterns, which cause peaks and dips in the perceived frequency response, as sections of the diaphragm move independently in or out of phase. They constitute one reason why loudspeaker response curves can look so jagged to the eye — and sometimes sound "jagged" to the ear, as well!

Cone behaviour at low frequencies can be studied reasonably well with the help of an ordinary strobe light but behaviour at high frequencies was very difficult to analyse until the laser appeared on the scene.

Up till that time, diaphragm design was really a matter of trial and error, involving instinctive and painstaking work, and culminating in subjective evaluation by way of listening tests.

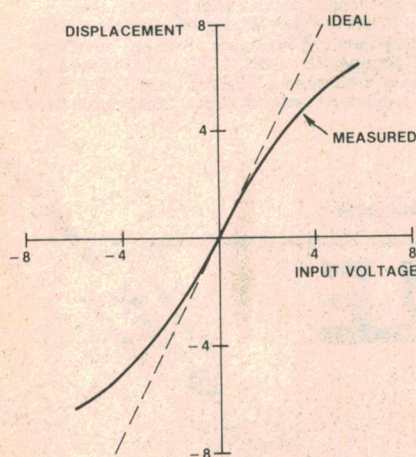


Fig. 2: As measured on the B&W Interferometer: a non-linear static transfer characteristic between the voice coil input and actual cone displacement.

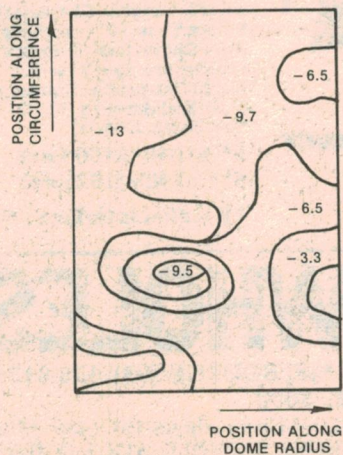


Fig. 3: A freehand tracing of a contour map showing the amplitude of a 2.5kHz signal over the surface of a 26mm dome tweeter. Harmonics can also be plotted.

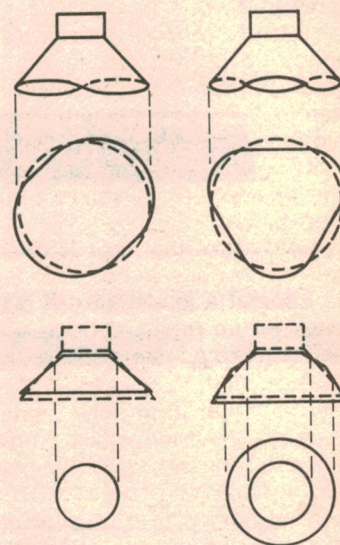


Fig. 1: Illustrated at the top are typical radial resonance modes for a free-edge cone. Below: typical symmetrical resonance modes involving one or more nodal circles.

Even now, loudspeaker design is as much an art as a science but tools like the computer and the laser are taking much of the guesswork out of the process.

Fig. 1 illustrates some potential radial and symmetrical resonance modes of a free-edge vibrating cone. Of necessity, the modes illustrated are simple ones but excitation at higher frequencies can produce much more complex effects with proportionately more serious impact on the sound quality.

Radial mode effects are most commonly caused by irregularities in the suspension or by cone flexing. Symmetrical modes commonly result from energy reflected back from the free edge towards the centre; they interact with the source energy to form concentric "standing wave" patterns, and are more serious in their effect on sound quality than radial mode aberrations.

Early methods of using the laser as a research and design tool involved illuminating the whole cone with laser light. This was reflected on to a photographic plate, which was also illuminated by a reference beam from

the laser, the two beams creating an interference pattern.

After the plate had been developed, the resulting "hologram" could be viewed by laser light. Parts of the cone at rest (nodes) might typically appear light while those in motion (antinodes) would appear dark.

Because the wavelength of laser light is extremely small (only about $0.6\mu\text{m}$ for a helium-neon type) the technique enables displacements down to about $1\mu\text{m}$ to be seen but each procedure took appreciable time and the holograms were frequently difficult to interpret, anyway.

In 1978, the well known British Company B&W Loudspeakers Ltd decided to invest in a "Vibration Interferometer", as developed by the Atomic Energy Establishment, based at Harwell England. This, too, uses a laser but the principle of operation is much more advanced.

The beam from the laser is directed towards the surface to be examined — in this context a loudspeaker cone — but passing, en route, through a Kerr cell and a polarised beam splitter (more about these later).

Reflected light from the cone is passed back along the optical path and then diverted through one of a pair of photomultipliers to electronic processing circuitry: a differential amplifier and frequency discriminator, as well as to a counter/processor and thence to both analog and digital

Fig. 4: A "three-dimensional" display showing amplitude as a function of frequency and cone diameter in a dome tweeter. Note the resonance peak centred at about 6kHz.



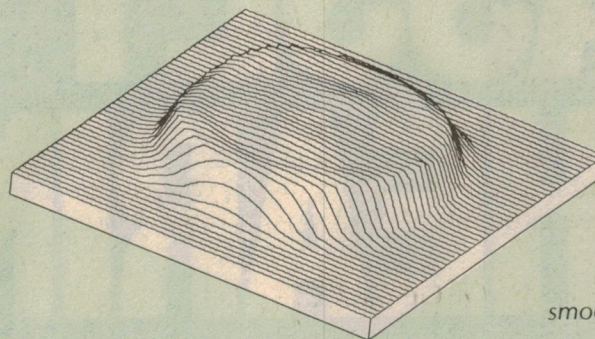


Fig. 5: Another "three-dimensional" plot, this time of B&W's new TM20 LM 12mm tweeter, at 12kHz. The contour is notably smooth and free of peaks.

instrumentation, including a PDP 11/40 computer.

Reverting to the Kerr cell, mentioned earlier, this modifies a small proportion of the laser beam energy, causing a 90-degree polarity shift and a constant frequency shift of about 5MHz.

Because of the polarity shift, it is diverted by the polarising beam splitter (also mentioned earlier) clear of the loudspeaker cone and back along another optical path to the second photomultiplier and the second input to the differential amplifier and output

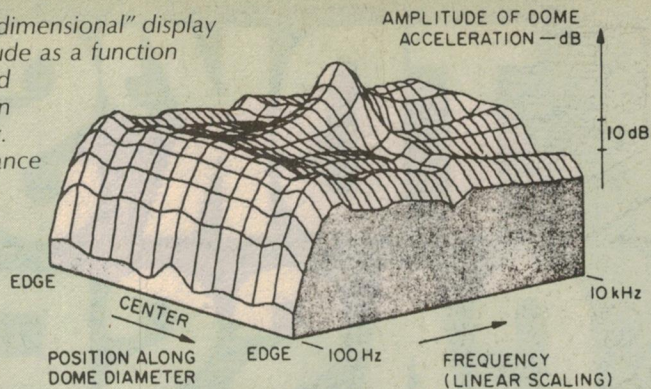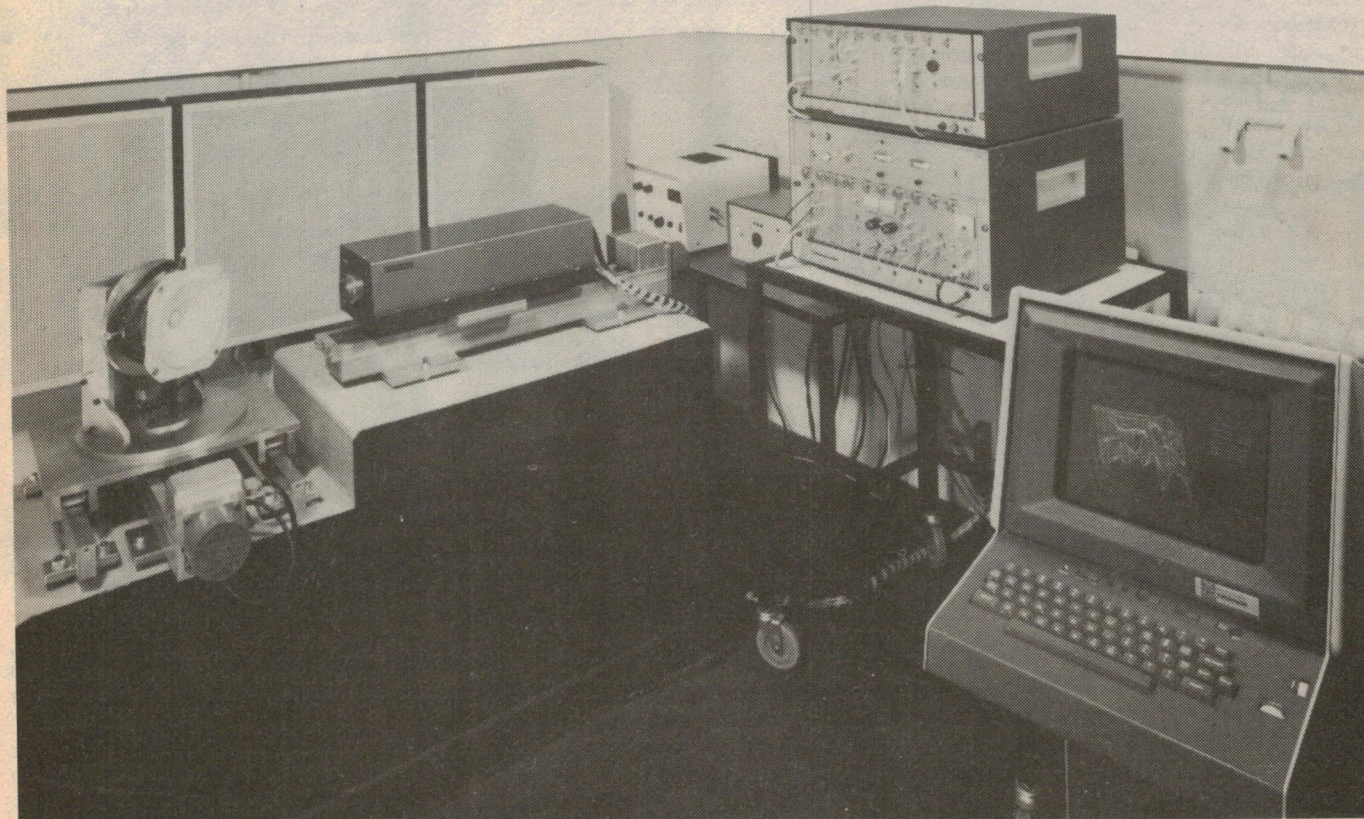

The B&W Interferometer set-up on the left and electronic instrumentation and computer terminal (right).


TDK'S NEW CASSETTES. HEARING IS BELIEVING.



The lab data supporting the just-released line-up of new TDK cassettes is impressive. But to fully appreciate the dramatic difference between these new tapes and any others you are using, ours included, you should hear for yourself. Choose from new MA-R and MA for metal position, new SA-X and SA for high position and new AD-X, AD and D for normal position. Also, we would be delighted to send you our free 26-page

Guide to Better Recording. Just write to:


TDK (Australia) Pty. Ltd., Unit 5, Level B South, 100 Harris Street, Pyrmont, NSW 2009.



Now TDK does even more amazing things to your system.

Note: Any person practising tape-recording should observe the provisions of the Copyright Act 1968.

John Bevins TDK/09

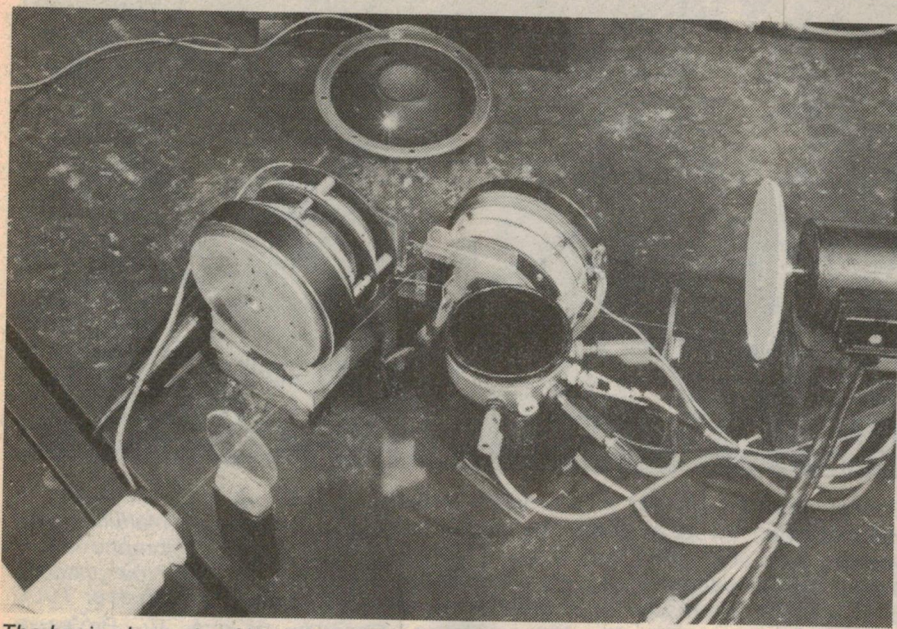

The basic elements of Wharfedale's SCALP (Scanned Laser Probe) system, set up on a benchtop for display purposes. Like B&W's Interferometer, it provides Wharfedale engineers with vital information about loudspeaker behaviour.

instrumentation. In short, it serves as a reference beam, constant in frequency but displaced from the original beam by about 5MHz.

The two frequencies are sensed and compared by the instrumentation when the cone surface is not moving.

When the cone is in motion, the reflected beam is modulated and a voltage is generated by the FM discriminator. The order of frequency modulation is, of course, proportional to the velocity of the illuminated portion of the cone surface.

Because of the initial frequency displacement of the reference beam, the system can sense not only the direction in which the cone is moving, but also the instantaneous displacement. Amplitude and phase responses can be displayed and stored on a magnetic disk by the PDP 11/40 computer.

(It is evident that the computer is a most useful "tool" and, on a recent visit to B&W I noted several access terminals in the factory.)

The position of the beam on the cone surface can be controlled manually but, for some applications, it can be controlled by a system of stepping motors, with a suitable data feed from the motor shafts to the computer. Complex measurement programs can therefore be initiated and the data stored for subsequent examination.

Fig. 2 illustrates how the laser interferometer can measure a non-linear transfer function — a distortion caused by a too-tight suspension system.

Fig. 7: A frequency response plot of a slice across the centre of a mid-range cone from 100Hz to 7kHz. Odd behaviour is apparent.

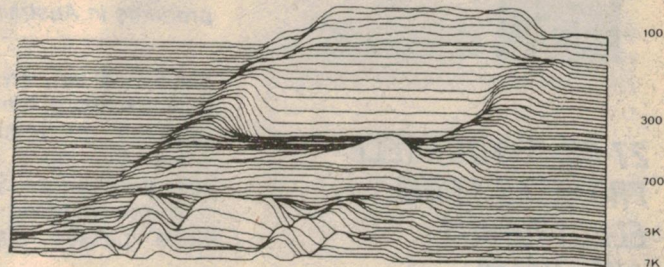


Fig. 6a: Seen through the eyes of Wharfedale's SCALP, the cone on the left has severe break-up problems while the cone on the right (Fig. 6b) is free of the effect.

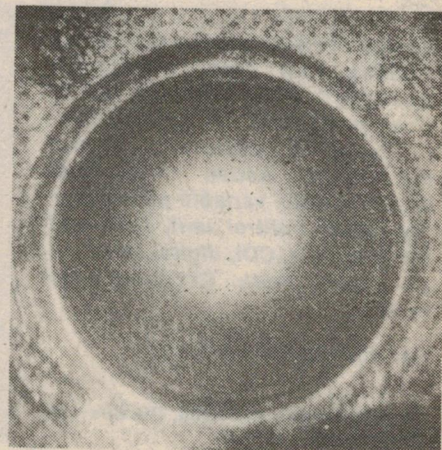


Fig. 3 represents a planar computer plot of the amplitude of a 2.5kHz fundamental drive signal over the surface of a 26mm dome tweeter. Similar contour maps can be drawn for the second, third, or any other harmonic.

"Three-dimensional" displays are also very useful as they can show the actual position of defects that cause

trouble and a typical example can be seen in Fig. 4. The resonance is centered on 6kHz with a peak of some 30dB.

The response of B&W's new TW20 LM tweeter (Fig. 5) is notable for a smooth, symmetrical contour pattern and it demonstrates what can be achieved with this remarkable new laser technique.

The graphical representation of the dome behaviour was derived from the velocity impulse responses measured at 180 points distributed over the dome surface. The frequency of the applied signal was 10kHz.

WHARFEDALE ALSO

I also visited the Wharfedale factory on this trip and again, I was impressed with the advances in laser technology. Wharfedale were pioneers in the use of holography and Dr. Fryer is justly proud of his Scanned Laser Probe system which rejoices in the name SCALP.

It is quite similar to the B&W system: Light from the laser is divided into two parts or beams; one is directed to the loudspeaker being tested and the other

to a rapidly rotating disk which changes its frequency by exactly 10.7MHz. Both are returned to the beam splitter which then sends a composite beam to a photocell.

The two components beat together to produce a signal which is amplified, passed to an FM discriminator and an X-Y plotter. When the speaker cone is stationary, a steady DC signal is

YOUR LAST CHANCE



27 DO-IT-YOURSELF PROJECTS FROM ELECTRONICS AUSTRALIA

You can't afford to miss out on this exciting book from "Electronics Australia". Here are just a few of the projects it contains: loudspeaker protector, digital metronome, active filter, drill speed control, variable power supply, wiper control unit, tach and dwell meters, CDI, digital clock... plus many more. Get your copy now!

Use this handy order form

To: Electronics Australia, PO Box 163, Chippendale, 2008.

Please send me... copy of "PROJECTS & CIRCUITS No. 2" at \$3.90 each. (Price includes packing and postage.)

NAME

ADDRESS

STATE POSTCODE

I enclose a cheque/postal order to the value of \$

AUDIO-VIDEO ELECTRONICS — continued




Shortly after World War II, a small enterprise was set up in a farmhouse in Wennebostel, Sweden, under the name "Labor W". It began by manufacturing vacuum tube voltmeters but, in 1947, diversified into dynamic microphones. In 1958, the company was renamed Sennheiser Electronic and, under the guidance of its founder, Professor Dr F. Sennheiser, grew into a concern with over 1000 employees and world-wide representation. Recently, at age 70, Professor Sennheiser (left) handed over control of the company to his 37-year-old son, Dr J. Sennheiser (right). In the centre of the picture is Mr Jim Cunningham, Managing Director of R. H. Cunningham Pty Ltd, authorised distributors for Sennheiser products in Australia.

generated but, as soon as the cone moves forward, the light beam is shifted upwards in frequency. Conversely, when the cone moves back, the reflected frequency will be lower.

The beam falling on the loud speaker cone passes through two mirrors

connected to magnetically energised coils: one drives the beam across the cone while the other scans vertically, enabling the plotter to build up a three-dimensional picture of the cone's vibration.


"Contour Maps" can also be

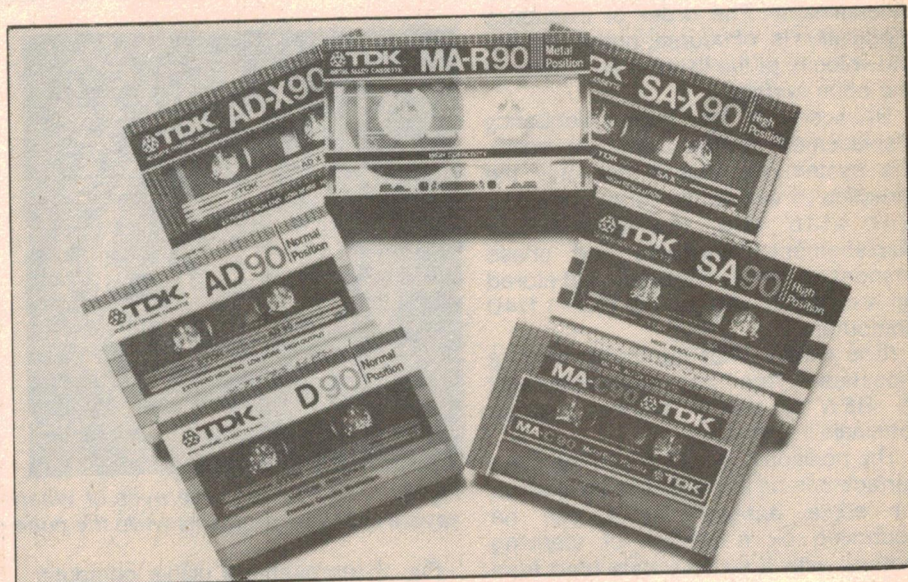

Unabashed by the challenge of new technology discs, TDK have upgraded the performance of their range of audio cassettes and re-packaged them for immediate recognition. The Laboratory standard mechanism, once reserved for the SA-X, MA and OD (now AD-X) series is now used for the AD and SA series. Silver striping distinguishes the good-results-modest-price cassettes, while a gold stripe indicates hifi specialist quality. Performance specifications have been revised upwards. [For details, contact Miss Colleen Maloney, at TDK (Australia) Pty Ltd, PO Box 100, Pyrmont NSW 2009. Phone (02) 660 4955].

TWO NEW TAPE RECORDERS FROM TEAC

Pictured on the right is the newly developed TASCAM model 58 0.5in eight-track recorder and reproducer, successor to the well proven professional model 80-8.

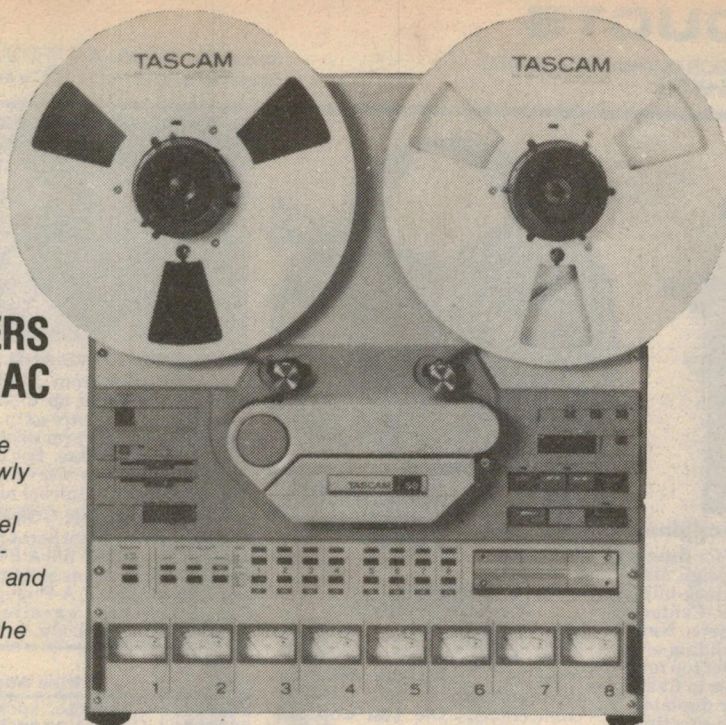

For those who need a deck of similar quality but with fewer channels, the TASCAM model 52 is available, a 0.25in two-track master recorder and reproducer, which replaces the 35-2D. Both have facilities and performance commensurate with a professional recording environment and warrant close consideration by anyone planning to equip or update. For detailed information, contact Travers Falkner, Tascam National Product Manager, TEAC Australia Pty Ltd, 115 Whiteman St, South Melbourne 3205. Phone (03) 699 6000.

produced and Fig. 6a and 6b show a cone with break-up problems compared with a high quality one as used with Wharfedale drive units.

SCALP gives "three-dimensional" plots of a cone's behaviour in a frequency range and a variation is called FRESP which is translated as Frequency Slice Plot (Fig. 7). With this method, the vertical scanning beam is turned off and each curve plotted is of the same horizontal slice but at a different frequency. With both kinds of plots, it is possible to change the phase of the display so "holes" become peaks.

Yet another possibility with FRESP is to make curves at any phase angle in relation to the loudspeaker input and the way a slice across the cone behaves throughout a complete vibration cycle can be studied.

As a matter of interest, both Wharfedale and B&W use computers for crossover design and it was fascinating to see complex equations solved in seconds. However, engineers still have to carry out the programming...

In brief

TELDEC of West Germany, well known for their expertise in phono record vinyl technology, have come up with a technique which may well supersede vinyl in at least one important role —

that of the master recording.

Traditionally, master cuts are made in vinyl, which is then given a thin coating of silver or gold to form the base for an electroplating operation.

While the technology has been highly refined, it does have its drawbacks. For example, the stylus needs to be heated and also specially shaped to produce a clean groove, with edges free of burrs and tears. The silver or gold metal deposition can also introduce problems, with dust particles being a particular hazard at this stage.

The new Teldec development replaces the vinyl master with a stainless steel disc, heavily plated with copper. They say that the inscribed groove is inherently clean (no burrs or tears) and is a more accurate record of the signal shape, because of the absence of plastic deformation.


Also, because the master is already in metal, the whole operation of depositing silver or gold and plating is eliminated. The master can be used more directly for the manufacture of dies and stampers.

AKG ACOUSTICS have gone one better than other manufacturers, with their latest hifi headphones. Not only are they miniature, not only do they fold flat, but the band folds like a pantograph so that they can fit into a pouch. (Talk to AWA at 554 Parramatta Rd, Ashfield, NSW 2131.)

AUDITEC AMPLIFIERS

THE HIGH QUALITY ALTERNATIVE

- Australian made
- Professional designs
- Carefully tested
- Rugged and reliable
- 12 month warranty

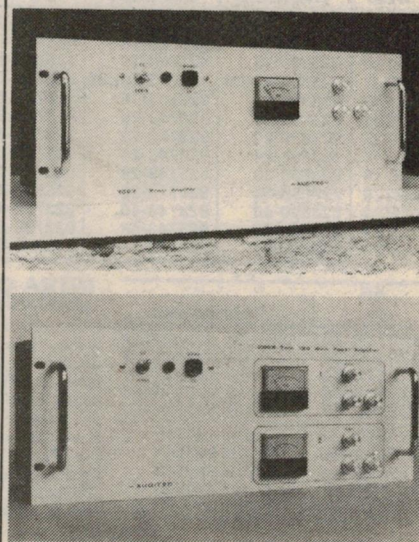

The 1027 and 2009 — still the best 250 watt and twin 100 watt amplifier value around.

For illustrated literature on our wide range of modules and amplifiers, write to

AUDITEC

Australia Pty. Ltd.

10 Waitara Avenue,
Waitara N.S.W. 2077


Or Phone: NSW, AUDITEC (02) 48 4116; QLD, DELSOUND
(07) 229 6155. VIC: ZEPHYR (03) 553 3266. SA:
NEIL MULLER (08) 272 8011



A P PRODUCTS

9450 Pineneedle Drive • P.O. Box 603 • Mentor, Ohio 44060
(216) 354-2101 • TWX: 810-425-2250

In Europe, contact A P PRODUCTS GmbH
Baumlesweg 21 • D-7031 Weil 1 • W. Germany

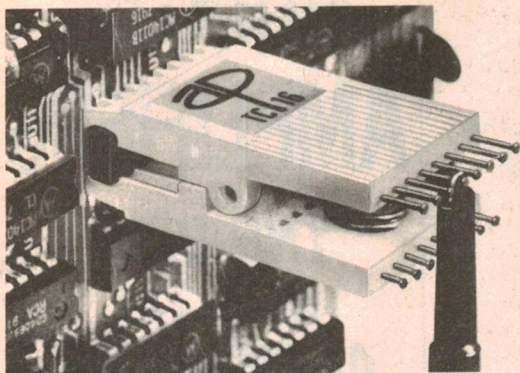

IC TEST CLIPS — We've improved on the original

The Super-Grip II IC Test Clip has a narrow nose for fitting on DIP's on high-density boards. "Open-nose" design also permits probe tip access at DIP leads. New "duck-bill" contacts are flat, won't roll off narrow DIP leads. Contact comb fits between DIP leads, eliminates shorts. New "nail-head" contact pins keep probe hooks from sliding off. Offset pin rows allows probes to hang free on longer top row pins and not interfere with shorter lower row. Sizes to fit all DIP's (TC-14 fits 14-pin DIP etc.). Gold-plated or unplated alloy-770 pin contacts. Simplifies testing, trouble-shooting and QC inspection. Also available with long, headless lead pins for attaching cable connectors.

IC Test Clips — AP No.				IC Test Clips
Alloy 770		Gold-Plated		
Std.	Headless	Standard	Headless	
923695	923690-08	923743-08	923739-08	TC-08
923698	923690-14	923739-14	923739-14	TC-14
923700	923690-16	923743-16	923739-16	TC-16
923702	923690-16LSI	923743-16LSI	923739-16LSI	TC-16LSI
923703	923690-18	923743-18	923739-18	TC-18
923704	923690-20	923743-20	923739-20	TC-20
923705	923690-22	923743-22	923739-22	TC-22
923714	923690-24	923743-24	923739-24	TC-24
923718	923690-28	923743-28	923739-28	TC-28
923720	923690-36	923743-36	923739-36	TC-36
923722	923690-40	923743-40	923739-40	TC-40
923724	923690-48	923743-48	923739-48	TC-48
923726	923690-64	923743-64	923739-64	TC-64

AP No.	Description
922576-20	20-pin connector
922576-26	26-pin connector
922576-34	34-pin connector
922576-40	40-pin connector
922576-50	50-pin connector
922578-20	20-pin switch
922578-26	26-pin switch
922578-34	34-pin switch
922578-40	40-pin switch
922578-50	50-pin switch


INTRA-CONNECTOR and INTRA-SWITCH

Connector mates in-line with standard .1" x .1" dual-row socket connectors & headers. Right-angle pins permit probing or daisy-chaining. Intra-Switch permits in-line, on-off switching to test individual circuits. Switches actuated with pencil or probe tip.

DIP JUMPERS

DIP jumpers fit standard DIP sockets. Ideal for jumpering within PC boards; between boards, backplanes, and motherboards; I/O signals, etc. Connectors molded onto cable for optimum strain relief; factory tested; probe access holes on backs. Conductors: 28 AWG. Color-coded cable uses 10-color sequence.


BREADBOARD JUMPER WIRE KIT



Each kit contains 350 wires cut to 14 different lengths from 0.1" to 5.0". Each wire is stripped and the leads are bent 90° for easy insertion. Wire length is classified by color coding. All wire is solid tinned 22-gauge with PVC insulation. Packaged in a convenient plastic box.

JK1 Wire Kit ... 923351

RIFA PTY. LTD.
(02) 570-8122
(03) 480-1211

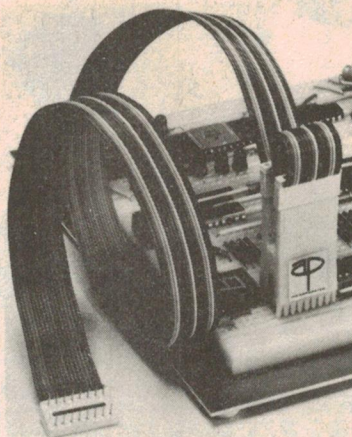


LOGICAL CONNECTIONS

A P Logical Connections are a Test Clip/Jumper Assembly combined. They are ideal for microprocessor-to-logic analyzer connections. The Test Clip end is a pair of single-row socket connectors attached to the pins of a Super-Grip II Test Clip. The remote end is a DIP connector. Connectors are molded onto the 18" color-coded flat ribbon cable. Probe access holes in backs of all connectors. Factory tested.

LOGICAL CONNECTION (Test Clip and Jumper)		JUMPER ONLY (No Test Clip)
End	AP No.	AP No.
With	923884-16	922594-16
DIP	923884-24	922594-24
Plug	923884-40	922594-40
No	923880-16	922590-16
DIP	923880-24	922590-24
Plug	923880-40	922590-40

Suffix denotes No. of pins.



Dip Jumper

Connector on both ends


AP No.	No. Pins
924106-06	14
924106-12	14
924106-18	14
924106-24	14
924106-36	14
924116-06	16
924116-12	16
924116-18	16
924116-24	16
924116-36	16
924126-06	24
924126-12	24
924126-18	24
924126-24	24
924126-36	24
924136-06	40
924136-12	40
924136-18	40
924136-24	40
924136-36	40

Dip Jumper

Connector on one end

AP No.	No. Pins
924102-36	14
924112-36	16
924122-36	24
924132-36	40

Suffix in AP No. is length (-06 = 6 in.)

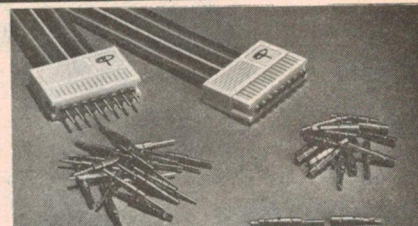

CONNECTOR PINS AND SOCKETS

Two sizes cover from .019" to .035" pin dia. Solder cup accepts up to 22 AWG wire. Has exceptionally secure grip. Units cannot be over-stressed, are practically indestructible. Pins are hard brass. Sockets are beryllium copper with brass sleeve, permit no contact damage. Gold-over-nickel plated. (100/pkg.)


MINIATURE 8-PIN CONNECTORS

Shown above; incorporates above pins and sockets. No. 923625 fits A P test clips with long, headless contact pins and fits on .025" sq. posts. No. 923626 fits all A P plug-in circuit boards. Cover provides excellent strain relief. Glass-filled nylon body.

AP No.	Pins and Sockets
923610	Connector sockets .019"/.028"
923612	Connector sockets .028"/.035"
923614	Connector pins .019"
923616	Connector pins .030"

AP No.	8-pin Connectors
923625	8-pin connector .028"/.035" (F) *
923626	8-pin connector .030" (M)
923627	8-pin connector .019"/.028" (F)
923628	8-pin connector .019" (M)

*Attaches to test clip.

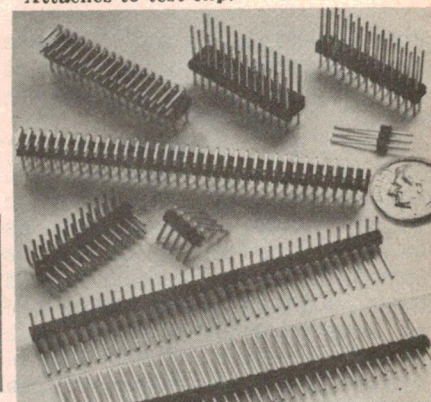

MALE AND FEMALE HEADERS

Molded-in, straight and right angle male headers have 36 posts per row. They are stackable to make up matrices of .025" sq. posts on PC boards or to use as patchboards for discrete connections. All mate with female connectors on .100" spacing. Posts extend .235" and .100" beyond .100" sq. header for wire wrapping and soldering. "Break to row length" feature. Posts are alloy 770, unplated. Female headers also are stackable and mate with matrices of .025" sq. or round posts on .100" centers. 36 "tuning fork" contacts per row are molded into header strip with .100" solder tails for PC board mounting or cable attachment. "Cut to row length" feature. Contacts are alloy 770, unplated. Dual-row headers are ultra-sonically welded at factory.

AP No.	Headers	No. Rows
929974	Female header	1
929975	Female header	2
929834-01	Male header, straight	1
929836-01	Male header, straight	2
929835-01	Male header, rt. angle	1
929838-01	Male header, rt. angle	2

XENITEK PTY. LTD.
(02) 938-4311
(03) 419-6606

IN
— STOCK —
AT




A P PRODUCTS

9450 Pineneedle Drive • P.O. Box 603 • Mentor, Ohio 44060
(216) 354-2101 • TWX: 810-425-2250

In Europe; contact A P PRODUCTS GmbH
Baumlesweg 21 • D-7031 Weil 1 • W. Germany

ACE ALL-CIRCUIT EVALUATORS

Two kits and five assembled breadboards for quick build-up and check-out of experimental circuits. All models have integral voltage distribution system with solderless, plug-in tie points on universal .100" x .100" matrix for excellent circuit design flexibility. These ACE's accept all DIP's, TO-5's, discrete components and solid wire patch cords to .032". Use buses for voltage, ground, reset and clock lines, shift command, etc. Five-way binding posts. Aluminum base serves as ground and has gold-anodized protective surface. Multi-tie-point terminals are non-corrosive nickel silver. Four rubber feet included.

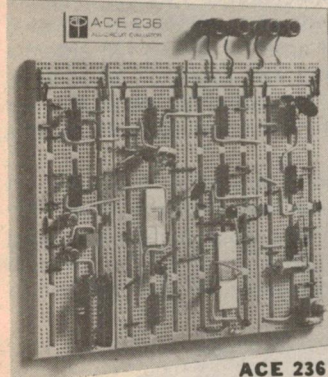


ACE 236

BREADBOARD II

Fully assembled. Unique system of 3 distribution strips, two levels of printed circuits and 3 binding posts. 18 buses are color coded and internally connected to 3 corresponding color binding posts. High distributed capacitance and low inductance design minimizes unwanted voltage spikes, provides superior low impedance system. Same solderless, plug-in matrix features as ACE's. Laminated NEMA G-10 glass epoxy; circuits and gnd. plane are 2-oz. copper; terminals are copper alloy 770.

AP No.	ACE's and Breadboard II	Tie-Pts.	DIP Cap.	No. Buses	No. Posts	Size (inches)
923333	ACE 200-K (kit)	728	8(16's)	2	2	4 3/4 x 5 3/4
923332	ACE 208 (assem.)	872	8(16's)	8	2	4 3/4 x 5 3/4
923334	ACE 201-K (kit)	1032	12(14's)	2	2	4 3/4 x 7
923331	ACE 212 (assem.)	1224	12(14's)	8	2	4 3/4 x 7
923326	ACE 218 (assem.)	1760	18(14's)	10	2	6 1/2 x 7 1/8
923325	ACE 227 (assem.)	2712	27(14's)	28	4	8 x 9 1/4
923324	ACE 236 (assem.)	3648	36(14's)	36	4	10 1/4 x 9 1/4
923605	BB II (assem.)	2696	36(14's)	18	3	7 x 9



TIE-POINT BLOCKS

Four models available with .1" matrix of solderless, plug-in, 4-tie-point terminals for custom layouts, attaching relays, displays, in/out patching. LED block accepts 3/8" dia. bulb (not included). All models have solder tails and mount by press-fitting into holes. All styles packaged 20 per pack

AP No.	Tie-Point Blocks	Tie-Points
923297	TB1 (single)	4
923299	TB2 (double)	8
923301	TB3 (triple)	12
923303	TB4 (quad)	16
923305	LB1 (LED)	1
923306	Assortment: 4 each of above 5 styles	

TERMINAL AND DISTRIBUTION STRIPS

For building custom breadboards. Solderless, plug-in matrices on .1" x .1" centers that accept all DIP's, TO-5's, discretes and solid wire jumpers to .032". Terminal strips available in 4- and 5-tie-pt. single and dual rows. Distribution strips available with 2 or 6 buses. Includes integral, non-shorting mounting backing.

AP No.	Terminal Strips, Distribution Strips and Super-Strips	Buses, Terminals and Tie Points	DIP Capacity	Size (in.) L. x W.
923273	217L Terminal strip	34 five-tie-point term.	2 (16's)	1.8 x 1.36
923269	234L Terminal strip	68 five-tie-point term.	4 (16's)	3.5 x 1.36
923265	248L Terminal strip	96 five-tie-point term.	6 (14's)	4.9 x 1.36
923261	264L Terminal strip	128 five-tie-point term.	9 (14's)	6.5 x 1.36
923291	154R Terminal strip	54 four-tie-point term.	*	6.5 x .63
923289	264R Terminal strip	128 four-tie-point term.	9 (14's)	6.5 x 1.1
923285	206R Distrib. strip	2 buses of 24 tie points	3.5 x .35
923281	209R Distrib. strip	2 buses of 36 tie points	4.9 x .35
923277	212R Distrib. strip	2 buses of 48 tie points	6.5 x .35
923293	606R Distrib. strip	6 buses of 24 tie points	6.5 x .43
923252	SS-2 Super-Strip	128 five-tie-point term. &	9 (14's)	6.5 x 2.25
923748	SS-1 Super-Strip†	8 buses of 25 tie points	9 (14's)	6.5 x 2.25

*Model 154R is a single strip of terminals; all others are dual row for DIP's.


†Gold-plated copper alloy terminals. #Height of all strips is .32 inches.



Powerace 101
923101 ... 120 VAC
923221 ... 220 VAC



Powerace 102
923102 ... 120 VAC
923222 ... 220 VAC



Powerace 103
923103 ... 120 VAC
923223 ... 220 VAC

POWERACE POWERED BREADBOARDS

Fully assembled. All three Powerace models offer a new dimension in convenience for fast, solderless, circuit building and testing. Each incorporates two A P Super-Strips with 1680 plug-in tie points to hold up to 18 14-pin DIP's. Breadboards accept all DIP sizes including RTL, DTL, TTL and CMOS devices, TO-5's and discretes with leads up to .032" dia. Built-in groundplane — ideal for high-frequency and high-speed/low-noise circuits. Interconnect with any solid 20 or 30 AWG wire via plug-in tie-point blocks on panels. Operate on 200 to 240 VAC at 50 Hz or on 110 to 130 VAC at 60 Hz (with fused power supplies). Ripple/noise is ≤ 10 mV at full load. Dimensions of all three Poweraces are: 7.5" wide, 11.5" deep, 4.0" high at the rear, but only 0.75" high at the front for working-level convenience. Weights are approx. 2.5 lb. Complete operating instructions included.

POWERACE 101 — General purpose for all types of circuits. Power supply is regulated, adjustable from +5 to +15 VDC at 600 mA. Line and load regulation is ≤ 3%. 0-15 VDC meter for monitoring power supply or circuits.

POWERACE 102 — For prototyping digital circuits. Power supply is regulated +5 VDC at 1 amp. Line load regulation is ≤ 1%. Built-in pulse detection with memory — combined with three buffered logic indicators, provide free built-in logic probe. Also contains two logic switches, four data switches, a clock generator and a one-shot pulse generator.

POWERACE 103 — Triple-output power supply for linear and digital circuits has outputs of +5 VDC at 750 mA; +15 VDC at 250 mA; and -15 VDC at 250 mA (±15-volt outputs track). Line and load regulation is ≤ 1%. Meter is built-in 15-0-15 VDC. Also contains two buffered logic indicators, two logic switches and two data switches.




Universal, breadboarding elements have 840 solderless, plug-in tie points, integral, low-impedance distribution system, accepts all DIP's, TO-5's, discretes and solid jumpers to .032". Hold up to nine 14-pin DIP's. Choice of contact finishes. Includes integral, non-shorting, instant-mounting backing.

RIFA PTY. LTD.
(02) 570-8122
(03) 480-1211

IN
— STOCK —
AT

XENITEK PTY. LTD.
(02) 938-4311
(03) 419-6606

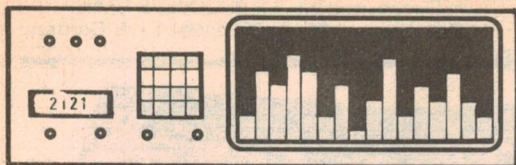

Hifi Review

Teac T-707 synthesised AM/FM tuner

The T-707 tuner is an attractively styled unit with features such as quartz locked circuitry, fluorescent display and a 12-station memory. An inbuilt 400Hz oscillator provides a constant level reference tone for use with tape recorders.

The T-707 digital synthesiser AM/FM stereo tuner is one of the latest offerings from Teac. With an overall height of only 72mm, there should be no problem finding enough space in the average hifi system for this tuner.

Other dimensions of the tuner include a width of 432mm and a depth of 289mm. The weight is listed as 3.7kg and the power consumption is 10W.

"memory". A portion of the fluorescent display will then light up with the word memory, and upon touching one of the buttons labelled 1-6, the station frequency will be stored at that location.

If no station is stored within a short time of pressing the "memory" button, then the tuner will "time out" and return to normal operation. Stations may be stored in any order and are recalled by

against power loss (eg blackouts) for up to a week by a 3.6V nicad battery which is presumably float charged during normal operation.

The back panel of the tuner has provision for connection of a variety of antennas. Screw-down terminals are provided for an AM antenna, a 75Ω FM antenna and a 300Ω FM antenna. In addition there is a 75Ω Belling Lee panel plug for the termination of a coaxial antenna cable.

Two minor criticisms of the connection arrangements are: one, the screw terminals are too close together, making the actual attachment of the antenna wires unnecessarily difficult; and two, a



Tuning knobs are a thing of the past with this synthesised tuner from Teac.

The front panel has a two-tone colour scheme of silver and grey, the silver being a scratch finish aluminium panel into which is set a grey plastic section housing most of the pushbutton controls and the fluorescent display.

The fluorescent display contains illuminating segments to show such information as frequency selected in MHz or kHz, received signal strength, stereo mode operation, band selected (AM or FM) and whether the memory is in store mode.

The pushbutton controls include AM or FM selection, a memory activation button, six memory enter and recall buttons, mode and muting buttons and a "rocker style" tuning button. In addition there is an inbuilt 400Hz oscillator to allow calibration of a tape recorder (either cassette or open reel) so that signals from the tuner can be recorded on a tape at the optimum level.

The tuner contains memory to store the frequencies of six AM and six FM stations. To place a station in memory it is necessary to tune to the desired station and then press the button labelled

simply pressing the buttons labelled 1-6 without first pressing the "memory" button.

If the desired station is on the other frequency band, ie AM instead of FM, then it is also necessary to push the button selecting that frequency band before recalling the station from memory.

Manual tuning is achieved by pressing either side of the large tuning button according to the desired direction of change. Touching the right hand side of the button causes the tuner to move up in frequency while touching the left hand side moves it down. Short touches on the button step the tuner in increments of 9kHz on AM and 50kHz on FM.

Sustained pressure on the button will cause the tuner to scan up or down the band with the output muted. There is no provision for an automatic stop when the tuner reaches a station so a close watch needs to be kept on the bar graph display to see when a station is reached.



When first turned on, the tuner will come up on the last station to which it was tuned in the frequency band selected. The tuner memory is protected

Belling Lee panel socket, rather than a panel plug, should have been used for the 75Ω FM antenna connection since most people will have antenna fly leads with plugs on each end rather than sockets.

A 300Ω dipole antenna is provided with the tuner for FM reception. However in many parts of Sydney (and around most other cities) it will not be directional enough to screen out multipath interference.

Also on the back panel is a symbol indicating that the tuner is "double insulated" although examination of the internal mains terminations tends to suggest that it would not comply with the Australian standards on "double insulation".

The internal examination also revealed another interesting fact. The Teac T-707 has a front-end input module that appears to be similar with the module used in the Technics ST-Z45 tuner reviewed in the September, 1982 issue. The modules are apparently made by an outside company called Mitsumi and are probably purchased already aligned to reduce

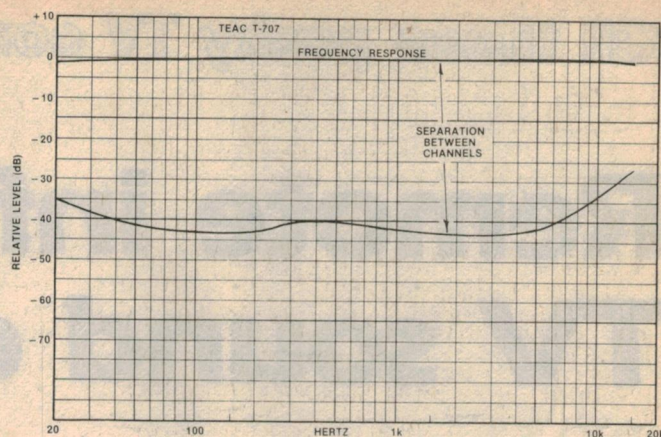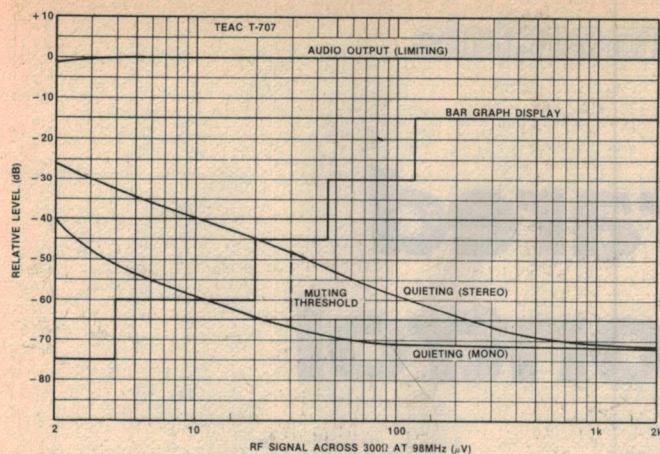

The quieting or s/n characteristic of the T-707 for various RF input levels. Frequency response across the audio band was very flat.

production costs.

Most of our test results have been summarised into the two graphs allowing a quick and easy comparison with other tuners we have tested.

Looking at the graph of the quieting characteristic it can be seen that 50dB of quieting was achieved in mono mode with an input of $3.5\mu\text{V}$. The automatic switch to stereo mode occurs around $2\mu\text{V}$ meaning that for all practical received signals the tuner will be stereo unless deliberately placed in mono mode.

The muting threshold is $30\mu\text{V}$ corresponding to a stereo quieting of about 50dB. There is a small amount of hysteresis associated with this threshold to prevent the tuner going into mute with signal strength variations in a borderline signal.

The five-step bar-graph display works well except that the threshold level of the first segment has been set too low and interstation noise keeps it on all the time. By resetting the threshold of the first segment and respacing the other thresholds to cover a greater range, the usefulness of the bar-graph could be further increased.

One point against bar-graph displays as signal strength indicators is that they cannot indicate the presence of multipath distortion. A conventional moving coil meter shows multipath signals as a wavering or flickering of the needle. Since bar-graph segments turn on abruptly, and employ hysteresis on the thresholds to prevent flicker, they cannot indicate the tell-tale small variations in signal strength caused by multipath.

Ultimate quieting was 72dB in mono and 71.5dB in stereo, a good result. The 19kHz stereo sub-carrier had a measured residual only 3.5dB above the noise and the 38kHz switching frequency could not be measured at all, its amplitude being below the noise. These are excellent figures.

Total harmonic distortion with a 100% modulated (75kHz deviation) input signal was: in mono mode, 0.18% at 6kHz, 0.06% at 1kHz, and 0.07% at 100Hz. In


stereo mode the figures were: 0.5% at 6kHz, 0.6% at 1kHz, and 0.5% at 100Hz. The manufacturer's claimed specification for stereo is 0.1%.

Limiting audio output was achieved with an RF input of only $3\mu\text{V}$. The frequency response was extremely flat being only 1.5dB down at 20Hz and 0.2dB down at 15kHz with respect to 1kHz. Response above 15kHz is not shown since this is affected by the 19kHz filter.

Channel separation equalled or ex-

ceeded 40dB over most of the audio band. There was a deterioration in the separation at 15kHz to only 27dB but this is to be expected and is quite adequate.

members. In particular, the AM bandwidth is unnecessarily restricted leading to muffled reproduction. The performance of the AM section of the tuner was not actually measured in the review, however we have no reason to doubt the manufacturers specifications. The specifications read as follows: Usable sensitivity - $450\mu\text{V/m}$ (loop antenna), selectivity ($\pm 9\text{kHz}$) - 30dB, harmonic distortion - 0.5%, signal to noise ratio - 50 dB. There was no

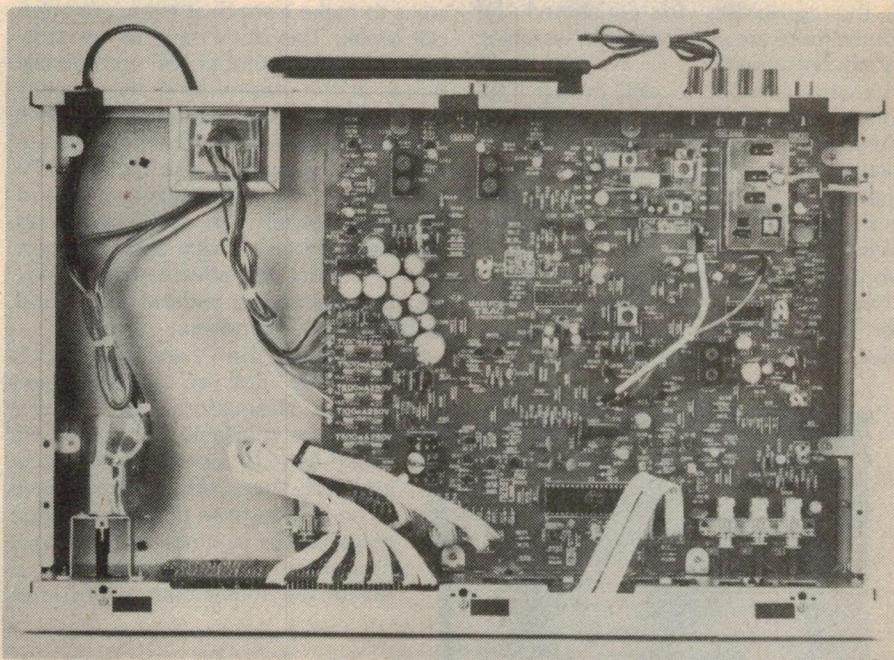

This photo shows how few components are needed to produce a tuner these days. The battery back-up for the memory is on the bottom left hand corner of the PCB.

ceeded 40dB over most of the audio band. There was a deterioration in the separation at 15kHz to only 27dB but this is to be expected and is quite adequate.

Listening tests confirm that the Teac is well up to par as far as FM reception is concerned and the digital tuning certainly works well and without any hitch. However the AM reception is poorer than found on most AM/FM tuners and could be said to be "equivalent to a \$6 portable" in the words of one of our staff

specification for AM bandwidth.

A loop antenna for AM reception is supplied with the T-707 and is held in place by a small clip on the back panel of the tuner. A hole is provided in the plastic moulding of the loop antenna to enable it to be hung on a wall or other convenient location away from signal suppressing metal surfaces.

The T-707 is available through all Teac dealers and carries a recommended retail price of \$299. (JS)

Kill those pesky TV commercials

Remote infrared TV sound control

Designed to relieve the long-suffering TV viewer from painful, brain-killing advertisements, our TV Sound Control provides remote control of volume. It gives eight steps of control, including full off, when total silence is called for. Give yourself a break and relieve advertising tedium today.

by JOHN CLARKE

To many commercial enterprises, television advertising has become an accepted means to persuade consumers to use or purchase their products. This acceptance is not necessarily mutual as far as the consumers are concerned. Of course there are alternatives to watching TV advertisements:

Viewers can opt to only watch non-commercial stations such as the ABC or multicultural television so that total protection can be had from advertisements. The only problem that can occur is what to do when a suitable program is being shown on a commercial station? Is it worth the torture of advertisements?

One alternative is to initiate conversation with fellow viewers during the advertisements, however, there is a

drawback. The conversation may prove far more interesting than the television program itself, rendering the TV redundant.

Another means to escape the advertising is to make a snack at every commercial break. This does have its rewards, but with the number of commercial breaks at the present time, the practice can lead to obesity. No, if your set does not already have remote control, the only practical alternative is to build our TV Sound Control. In this way the volume of the commercial can be turned off remotely and fast; a vital and important feature. In fact, the advertisements may be more interesting without sound and certainly more humorous.

Of course the TV sound control is not only just an advertisement volume attenuator. Eight volume steps are available to adjust the sound level to a comfortable listening level. The actual level may need to be altered from time to time due to variations in ambient noise in a household situation and this is where the sound control becomes

very useful. Just a touch of the button and the volume is adjusted.

Features

The TV sound control comprises two separate circuits; the transmitter and receiver. The transmitter is housed in a small plastic utility box and contains two control buttons, one for increasing the volume, UP, and the other for decreasing the volume, DOWN. It is completely self contained, powered with a small battery and transmitting with infrared light to the receiver. The receiver is housed within the TV cabinet and is powered from the low voltage supply of the TV set. The infrared receiver diode is mounted at the rear of the TV chassis so there is no need to drill a hole in the front of the TV and mar the finish.


Two relatively simple connections need to be made to the TV set. One is to break into the volume control of the audio amplifier circuit. This is easily found by locating the volume control and finding the wiper wire. The second connection is to pick up the low voltage supply to the TV circuitry and can be found by referring to the circuit diagram supplied with the TV set.

In use, the transmitter is located on the arm of the chair within easy reach of the viewer. When an advertisement intrudes the DOWN button can be pressed and almost immediately the sound is completely attenuated. When the adverts have finished, the UP button is pressed and the volume increases until the required volume is reached whereupon the button is released.

The eight volume steps can be chosen by either: a momentary press of the Up or Down button, whereby the volume will alter by one step only; or by holding the button, the volume will glide from one step to another at a 0.5 second rate.



The transmitter is housed in a compact plastic utility case that fits easily in the hand. Just press the down button to kill those commercials!

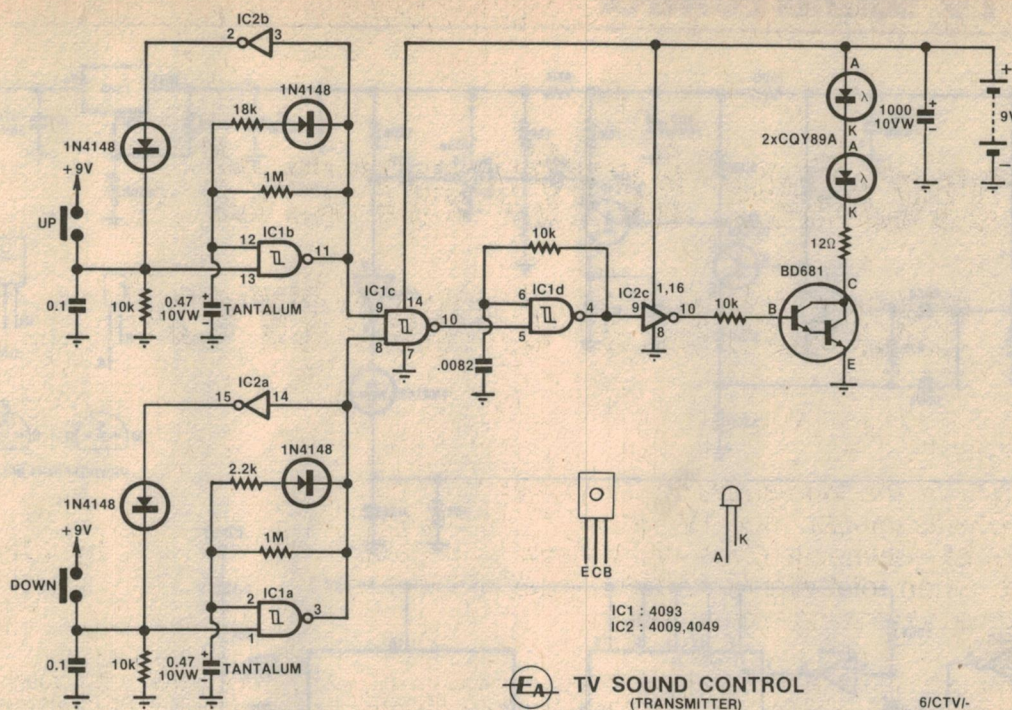

The transmitter circuit uses three gated oscillators and a Darlington transistor driving a pair of infrared LEDs.


When the volume reaches the extremes, either maximum or minimum volume, the volume will stay at that level until a change in volume direction is selected.

At first switch on of the TV set, the sound control will automatically reset to half volume. It is envisaged that the normal listening level will be first adjusted on the TV set volume control, and any further volume adjustments made solely with the remote control.

Attenuation at the highest volume level can be regarded as 0dB. From there down the attenuation increases in approximate steps of -3, 4, 5, 6, 7, 8dB and complete attenuation on the last step. The reason for this apparently strange series of attenuation steps rather than having, say, 3dB per step is that greater control is desirable at higher volume levels.

Infrared signals

The transmitter provides two types of signals: a 10kHz signal of 5ms duration for an UP code and a 10kHz signal of 1ms duration for a DOWN code. So that the TV volume will glide up or down through each attenuation level, the 10kHz signals need to be repeated at regular intervals whenever the UP or DOWN buttons are pressed. In addition it is necessary that a complete five or 1ms pulse is generated regardless whether the UP or DOWN button is pressed or released during this transmitting interval. Without this feature, an UP signal may be truncated to the length of a DOWN signal and be interpreted in-

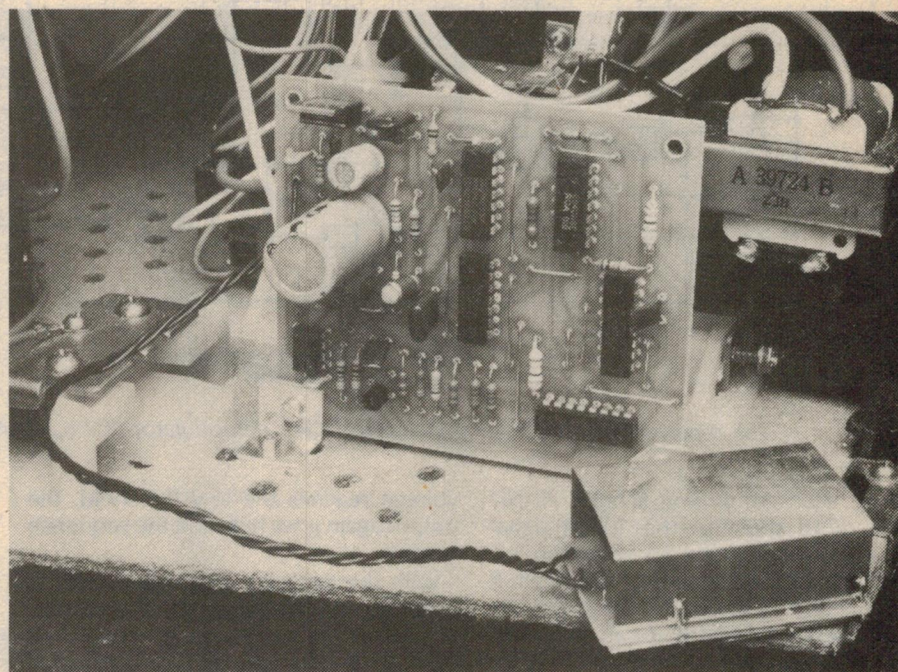

This photo shows the amplifier and demodulator boards mounted in a TV chassis. Metal shielding is fitted to the amplifier module to protect the circuit from line flyback pulses generated by the TV receiver.

correctly as a DOWN code by the receiver circuitry.

The receiver needs to reliably decode the transmitted signals and switch attenuating resistors to provide the requisite volume.


The circuit

The total circuitry for this TV sound control is relatively simple and low in

cost. The hand held transmitter uses a mere handful of components comprising two CMOS ICs, a Darlington transistor and a couple of infrared LEDs plus a few resistors, capacitors and diodes. The receiver includes six low cost ICs, a photodiode, voltage regulator and a few resistors, capacitors and diodes.

Let's look at the transmitter circuit first: There are three gated oscillators in this

Infrared TV sound control

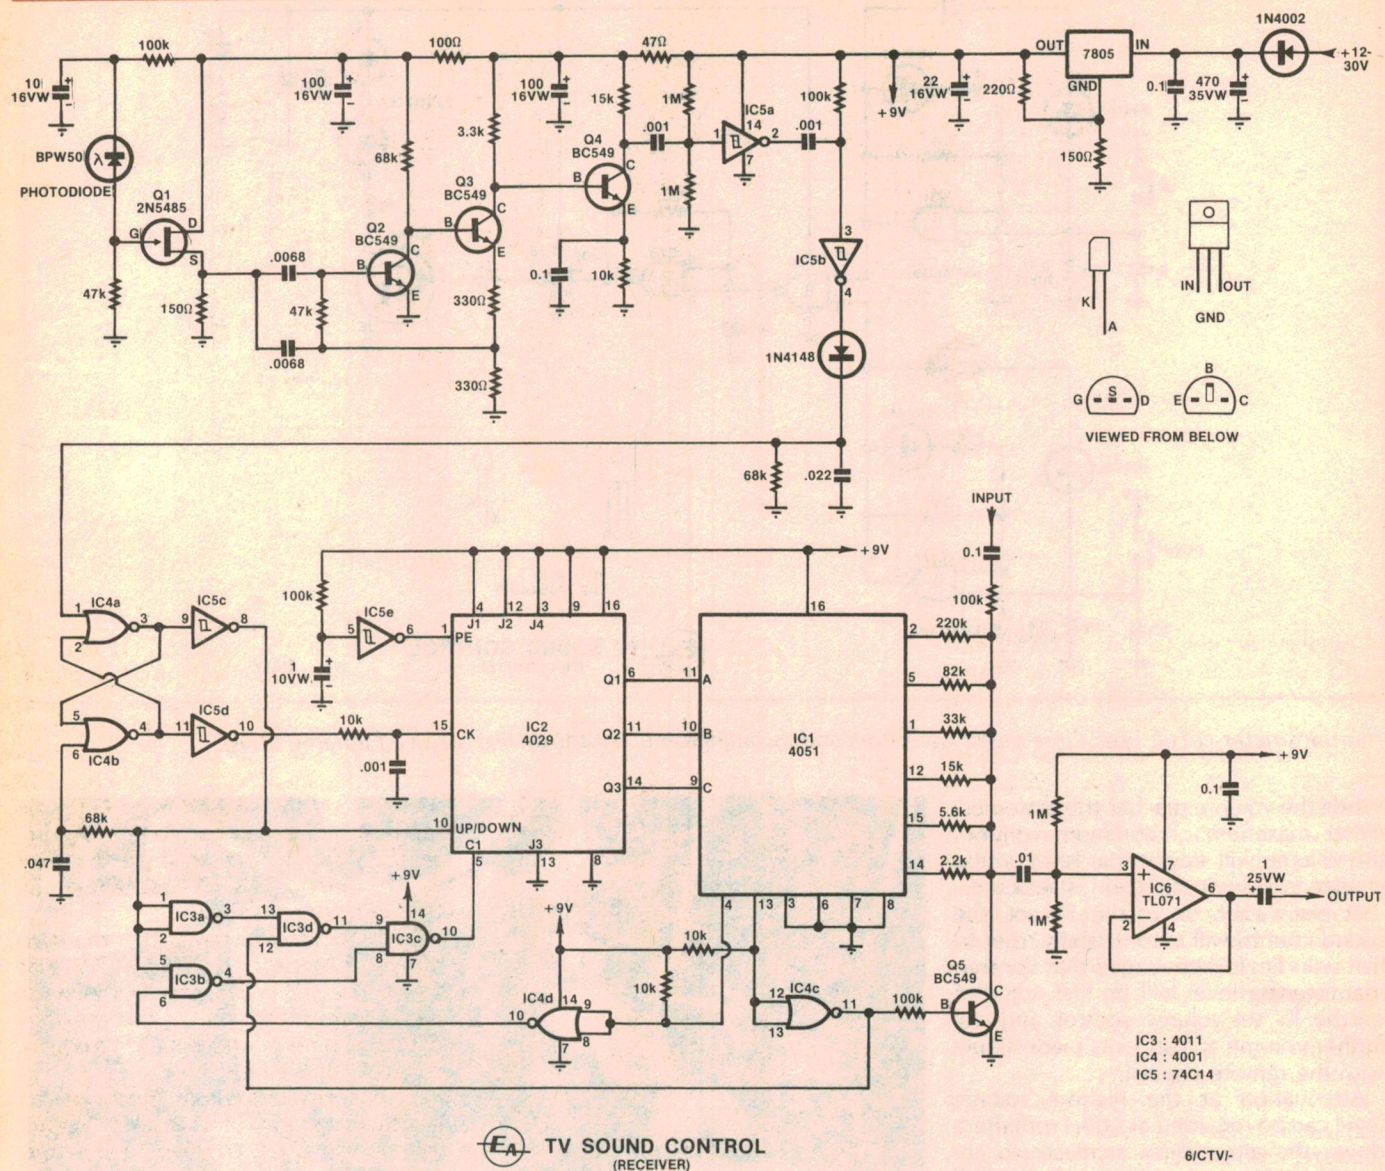

The receiver consists of an amplifier (Q1-Q4), demodulator (IC2-IC5), and audio attenuator (IC1, IC6).

circuit, each comprising Schmitt NAND gates. IC1d provides the 10kHz signal and is enabled, ie, it runs, when pin 5 is high. This only occurs when either pin 8 or pin 9 of IC1c is low. IC1b provides the low 5ms pulse, suitable for an UP signal. Similarly, IC1a provides a low 1ms pulse suitable for a DOWN signal.

To see how these Schmitt NAND gate oscillators function, we shall take IC1d as an example. Assuming pin 5 is high and the .0082 μ F capacitor is initially discharged, the NAND gate now functions as an inverter with pin 6 low and the output high. The capacitor now begins to charge via the 10k Ω resistor. When the capacitor voltage reaches the high threshold of the Schmitt, the output changes to a low state and the capacitor now begins to discharge through the 10k Ω resistor. When the capacitor

voltage reaches the low threshold, the output again goes high and the sequence repeats.


With the capacitor and resistor values specified, the oscillator runs at 10kHz. Whenever pin 5 goes low, the output of IC1d is forced to go high and remain in that state. This provides a simple method of gating the oscillator on and off.

IC1b oscillates in a similar manner to IC1d, except that two separate charging and discharging paths for the 0.47 μ F capacitor are provided. When the output, pin 11, is high, the capacitor takes about 0.5 seconds to charge via the 1M Ω resistor. This is the period in which the 10kHz oscillator is gated off. When the output of IC1b is low, the capacitor can discharge through the 1M Ω resistor and the 18k Ω resistor and forward-biased

diode. This allows the capacitor to discharge quickly providing the 5ms low signal to gate on the 10kHz oscillator.

To enable this oscillator, the second input of IC1b, pin 13, must be brought high and this can be done in two ways. Firstly, to begin the oscillator sequence, the Up button must be pressed, which pulls the input high. The switch contact debounce circuit consists of the 0.1 μ F capacitor and 10k Ω resistor. (The resistor keeps pin 13 low when the Up switch is open circuit.) The oscillator starts and after about 0.5 seconds the output goes low. IC2b inverts this to a high which keeps pin 13 high via the forward-biased diode. This second means of enabling the oscillator ensures a complete 5ms low output regardless of when the Up switch is released.

The Down oscillator, IC1a, operates in

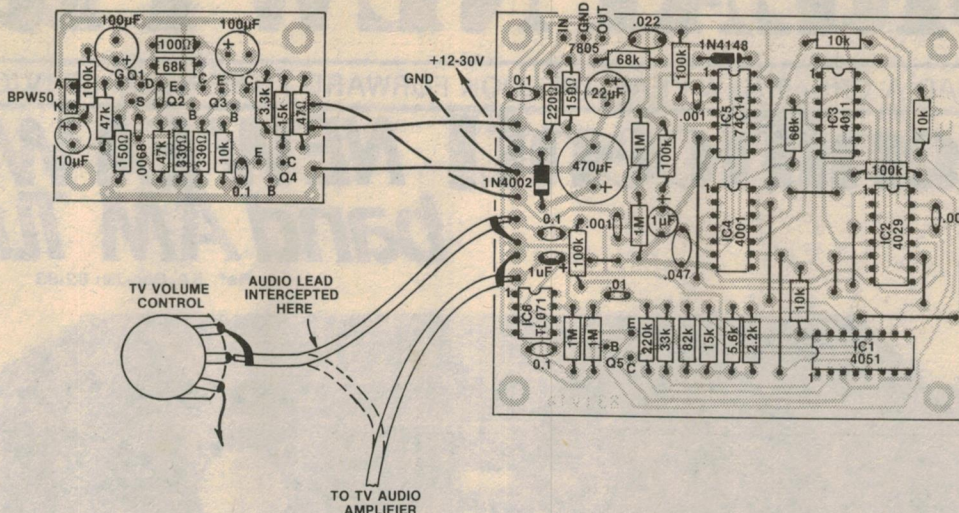

Above: parts overlay and wiring diagram for the receiver circuitry.

a similar manner to the Up oscillator with the exception that the discharge time is reduced to 1ms by using a 2.2k Ω resistor.

The output from IC1d, the 10kHz oscillator, is inverted with IC2c which provides a normally low signal when IC1d is gated off. This inverter drives a BD681 Darlington transistor via the 10k Ω resistor. The Darlington provides the necessary gain and high current capability to drive the LEDs while the 12 Ω series resistor limits the current to prevent damage to the LEDs.


Even so, the peak current is about 300mA which is more than the battery could supply on its own. Most of this peak current is supplied by the 1000 μ F capacitor across the battery. When the buttons are not being pressed, the current drawn from the battery is very low, typically around 10 μ A. Consequently, an on/off switch is unnecessary and even with frequent usage, the battery should last for more than a year.

The infrared LEDs used are either Philips CQY89A or Siemens LD271. These are similar in appearance to the more usual red LEDs, except that they are encased in a dark blue epoxy encapsulation which is translucent to infrared radiation.

Let us now turn to the receiver circuit which consists of three sections: the amplifier, demodulator and the audio attenuator.

Infrared light generated by the transmitter LEDs is received by an infrared photodiode. This is a Philips BPW50 and is specifically designed to match the CQY89A LED. The diode also has an integral infrared filter which almost completely rejects visible light.

The photodiode has its cathode con-

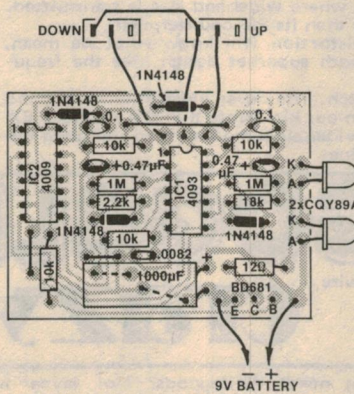

Switch connections for the transmitter are made to the common and normally open terminals, as marked on the switch body.

nected to the 9V rail via an RC decoupling network, while the anode is connected via a 47k Ω resistor to ground. In operation, the photodiode acts as a current source such that it generates a current proportional to the incident light. The current signal is converted to a voltage by the 47k Ω resistor.

The signal from the photodiode is fed to the input of Q1, an N-channel FET, connected as a source follower. The gain of this stage is about 0.5.

Output impedance of the FET stage is about 100Ω and this drives a bandpass filter consisting of transistors Q2 and Q3. The centre frequency of the filter is about 10kHz and it has a Q of 10; ie the bandwidth is 1kHz. This bandwidth is wide enough to pass the 10kHz signal from the transmitter, even allowing for some mistuning, yet effectively eliminates interference from other sources (eg fluorescent lights).

Disregarding the two $.0068\mu\text{F}$

capacitors for the moment, Q2 and Q3 form a two-stage inverting amplifier. Both transistors operate as common emitter amplifiers, with the second stage providing two separate outputs: one from the junction of the two 330 Ω resistors and the second from Q3's collector. The first output has a low impedance and is used to drive the filter and to provide DC feedback via the 47k Ω resistor to bias Q2.

The filter components are the two $0.0068\mu\text{F}$ capacitors and the $47\text{k}\Omega$ bias resistor (for Q2) which, together with the low output impedance of the previous FET stage, determine the centre frequency and Q of the filter.

The collector output of Q3 provides an amplified version of the filter output. This output is DC-coupled to the next stage which consists of transistor Q4 in another common emitter amplifier circuit. Gain of this stage is at least 150. A $0.1\mu\text{F}$ emitter bypass capacitor is included to provide further attenuation of unwanted low frequency signals.

Following Q4, the signal is AC-coupled to IC5a which is a CMOS Schmitt trigger. When the signal peaks from Q4 exceed the upper and lower thresholds of the Schmitt trigger, the device will square up the signal and provide a constant level 10kHz square wave output. If the input signal drops below the trigger thresholds, the 10kHz signals from the output will cease and the Schmitt will remain in its last state, either high or low. IC5b is capacitively driven from IC5a and has a normally low output due to the 100kΩ resistor connected to +9V at its input.


To convert the presence or absence of a 10kHz signal into a simple high or a low signal, the output of IC5b is filtered with the .022 μ F capacitor connected via

GREAT NEW PRODU

HOPE YOU HAD A GREAT NEW YEAR. WE LOOK FORWARD TO BEING OF SERVICE TO YOU IN '83

magnificent! *NEW EA Wide-band AM Tuner* ☆

Ref: EA Dec-Jan 82-83

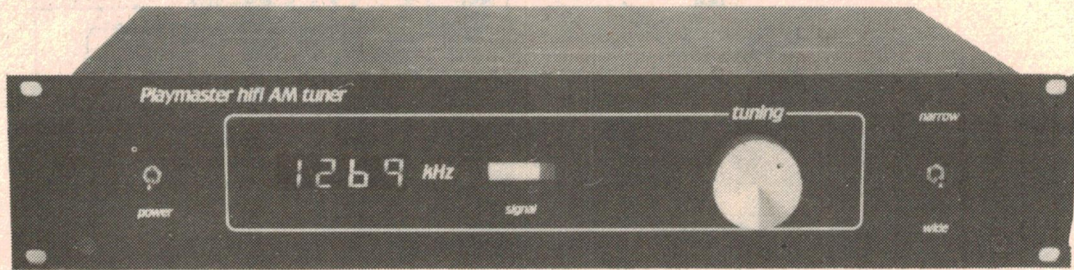

Australia is one of the few countries in the world where wideband AM is transmitted. In fact a good quality AM signal can be much better than its FM counterpart!! Anyone who has suffered from FM multipath distortion will know what we mean. The Playmaster AM tuner is a true broad-bandwidth superhet design. See the frequency response graph. Once again, the Jaycar kit is a high quality approach. The cover illustration shows the high quality front panel supplied EXCLUSIVELY in our kit. (Note that the standard EA front panel artwork is different). The Jaycar kit provides all components to complete the project INCLUDING a completely pre-punched cabinet.

FANTASTIC VALUE
AT ONLY

\$249



BOGGLE GOGGLES! crazy 9.50


You've wired your head for sound, now you can wire your head for light!! Great for parties or discos. Simply connect to your spectacles or sunglasses. CRAZY!!!

Ref: December 1982

JUMBO car vacuum cleaner

What next? Whitegoods? No! Jaycar has made a scoop purchase of what is in our opinion the best car vacuum cleaner around. Not a toy - it sold for \$29.95. We have less than 100 of these units (all accessories included) for only \$19.95. That's right \$19.95.

* 12V cig. lighter power * Powerful suction capability * Huge dust compartment for very dirty cars * Good for workbenches (12V reqd) * Inbuilt light.

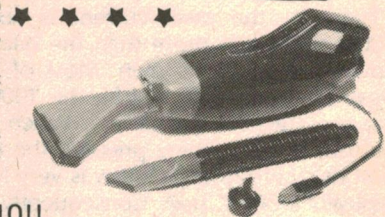

ONLY \$19⁹⁵ SAVE \$10!!

GREAT NEW KITS FROM DECEMBER ETI GREAT NEW KITS FROM DECEMBER ETI GREAT NEW KITS FROM ETI
GREAT NEW KITS FROM DECEMBER ETI GREAT NEW KITS FROM DECEMBER ETI GREAT NEW KITS FROM ETI

train controller

New project that features simulated inertia and loading.

- Throttle and brake controls like a 'real' train
- Will run Micro-gauge to twin 'O' gauge
- Complete with control panel

Ref: ETI December 1982

\$69
for single track




polyphonic organ ☆

- "Touch Sensitive" PCB board
 - Fully Polyphonic
 - Two voices
 - 25 note, 2 octave keyboard
 - Can run from battery or plugpack
- Unbelievable performance for the price.
(Case not included)

Ref: ETI January 1983

\$49.50

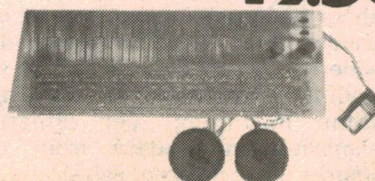

0-30V 1amp power supply ☆

- Fully protected
 - Output variable from 0-30V DC
 - Selectable current limit
 - Both voltage and current metering
 - After a multimeter & soldering iron an absolute must for the enthusiast.
- You will never own a more useful piece of gear.

Ref: ETI December 1982

\$49.50
complete



CTS & KITS FOR '83!

HOPE YOU HAD A GREAT NEW YEAR. WE LOOK FORWARD TO BEING OF SERVICE TO YOU IN '83


Video Enhancer

Unbelievable but true. This unit enables you to actually IMPROVE a copy of a recorded video tape. How? By amplifying the top end of the video signal by a small amount. This sharpens up the detail of the picture. Dubs can actually look better than the original. Works as a video distribution amplifier as well. Will drive up to 4 VCR's from one VCR input.

value for money

NOT A KIT
BUILT &
TESTED

\$89

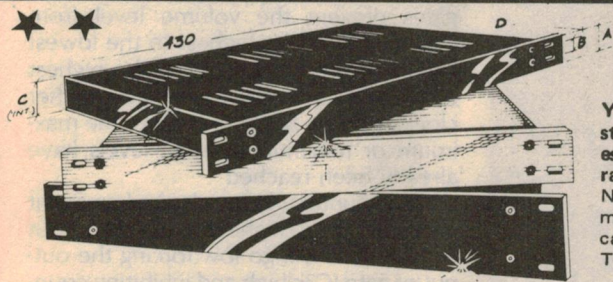

GREAT RACK CABINETS IN STOCK!!

Your Budget probably will stretch to afford our professional series all aluminium rack cabinets.

Now your Pre-amps, control modules, monitor panels etc can look every bit as good as Technics, Nakamichi etc.

Finish	A	B	C	Price	5 or more	Finish	A	B	C	Price	5 or more
Natural	44	34	38	\$39.50	\$38.00	Natural	88	57	82	\$45.00	\$42.50
Natural	132	89	126	\$49.50	\$45.00	Black	44	34	38	\$39.50	\$38.00
Black	88	57	82	\$45.00	\$42.50	Black	132	89	126	\$49.50	\$45.00

PRO-GRADE SOLDER SUCKER

SEE REVIEW EA DECEMBER 1982

Our claim. The best solder sucker for its price in Australia!

- Unique double diaphragm design
- O-ring seal
- Spare O-rings supplied
- Teflon tip
- Self-cleaning plunger
- One hand operation
- Non slip body
- Pro-grade for heavy usage.
- 225(l) x 28(d)mm
- Spare Teflon tip \$1.95




ONLY \$11.95

QUALITY FM ANTENNA "JABBER GRABBER"

\$29⁵⁰

Ground Plane Whips \$7.95ea



JABBER-GRABBER

OK. So you have spent a fortune on your Hi Fi system. The FM is great. Almost. You are in an area where the FM fades badly or is affected by multipath distortion. Not all stations but only the ones that you want to listen to!! We may have the answer to your problem!! Jaycar has had a helical FM antenna SPECIALLY MADE for vertically polarised transmissions (i.e. most FM stations). The unit is supplied with a vertical whip, heavy duty stainless steel bracket, pre-terminated coax lead (environmentally sealed), U-clip. It will mount on top of your TV mast and give about 3dB of gain over isotropic. The bracket is designed to fit any flat surface & will even lock into a window sill! If you cannot mast mount you will need the two ground plane radials as shown in the illustration. The "Jabber-Grabber" may be the FM antenna to solve your problems!!

low cost IC inserters extractors

Up until now these have cost a fortune!!

- Features:
- CMOS SAFE conductive plastic
 - Exclusive bent pin alignment guides in handle . 8 to 40 pins.
 - Ground strap can be connected.
 - One hand operation.

INSERTERS

CIT820	8-20 pin	ONLY \$5.95
CIT2428	24-28 pin	ONLY \$6.95
CIT3640	36-40 pin	ONLY \$8.95
CIT22	22 pin	\$6.50



from \$2.95

EXTRACTOR

Deceptively simple looking device. One piece metal construction. 8-40 pins ET-840 ONLY \$2.95 **IMPORTANT!!** Don't be conned into buying a non conductive inserter/extractor. The possible static damage to your MOS I.C.'s could cost you a fortune!!

'T-REX'

Our wirestripper, nicknamed 'Tyranosaurus-Rex' is far from extinct! It's a great way to strip all sorts of cable without damaging the conductors. It's also a price breakthrough!!

- Automatically adjusts to insulation diameter.
- One hand operation.
- New low price for an automatic wirestripper



top ONLY buy \$9⁹⁵

HIGH SPEED LOGIC PROBE



- DTL/TTL/HTL/CMOS/MOS compatible!!
- Pulse memory
- 10MHz input frequency (tested to 12MHz)
- ± 50V input overload
- Complete with leads.

ONLY \$29⁹⁵

Jaycar NUMBER 1 FOR KITS

125 York Street, Sydney 2000
Phone: 264 6688 Telex: 72293

"Nevilles Corner"
Cnr. Carlingford & Pennant Hills Road,
Carlingford
Phone: 872 4422

Mail Orders To: Box K-39 Haymarket
Sydney 2000


POST AND PACKING CHARGES
\$5-\$9.99 (\$1.20) \$10-\$24.99 (\$2.40)
\$25-\$49.99 (\$3.50) \$50-\$99.99 (\$4.60)
\$100 up (\$6.20)

NEW SHOP HOURS
Mon-Fri 8.30 to 5.30pm
Sat 8.30 to 12.00pm
Thurs night to 8.30pm

MAIL ORDER BY
BANKCARD VIA
YOUR PHONE



YOU CAN PHONE CARLINGFORD ON 872 4444 AS WELL!

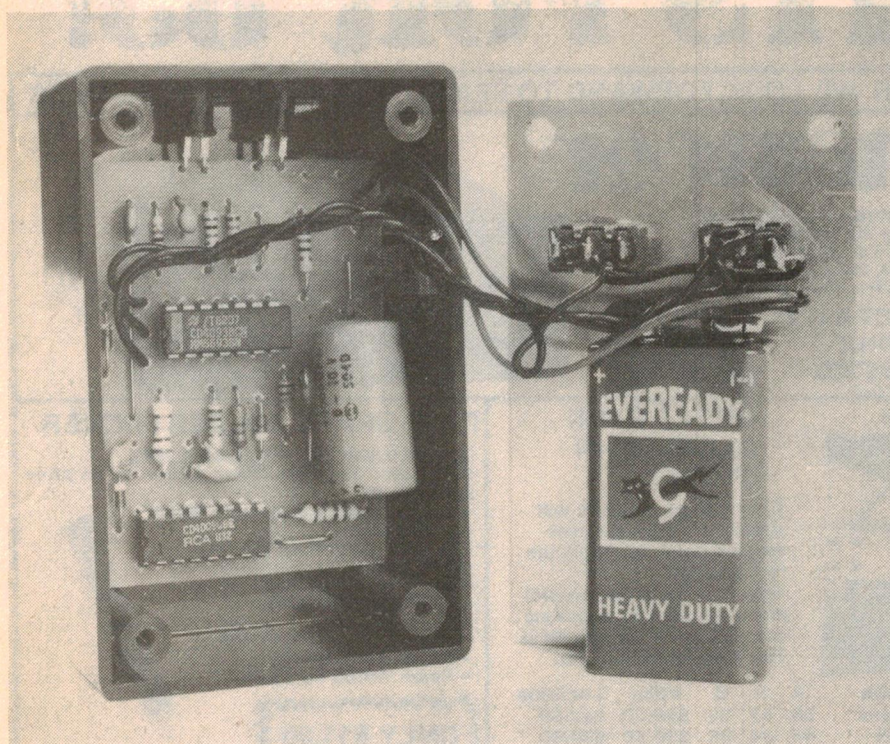

View inside the transmitter case.

the 1N4148 diode. This allows the capacitor to charge when the output of IC5b is high and the 68k Ω resistor discharges the capacitor when IC5b is low. Providing there is a 10kHz signal the capacitor voltage will be high. When there is no signal, the capacitor is discharged.

The output of the rectifier filter will appear as a pulse on pin 1 of IC4a and with the filter time constant used the duration of the pulse will be approximately the same as the signal originally transmitted. As noted above the "down" pulse is about 1ms long while the "up" pulse is about 5ms long. This difference in pulse length is decoded by NOR gates IC4a and IC4b (connected as an RS flipflop), and the inverter IC5c.

Normally both inputs to the flipflop, pin 1 of IC4a and pin 6 of IC4b, are low, but when a pulse from the filter arrives the flipflop is set, with the output of gate IC4a low and the output of gate IC4b high. The flipflop would remain in this state if it were not for the resistor at the output of IC5c charging the 0.047 μ F capacitor at the input of IC4b, pin 6, to form a time delay reset.

The reset for the flipflop occurs about 2.5ms after the leading edge of pin 1 goes high which is after a down pulse would finish and before an up pulse would finish. So if an up pulse was received the output of IC4a would be low since pin 1 will still be high immediately after the flipflop is reset. If a down pulse is received however, pin 1

would be low by the time the flipflop is reset and the output of IC4a will therefore be high.

The leading edge of the reset pulse is also used to clock IC2, a binary up/down counter, and the output of IC5c is connected to the up/down input of the counter. Since the output of IC5c will be low for a down pulse and high for an "up" pulse after the reset signal, the counter will count up for an "up" pulse and down for a "down" pulse.

The 10k Ω resistor and .001 μ F capacitor at the clock input of the counter delays the reset pulse slightly so that the up/down signal will have been present for an appropriate time before the counter is clocked.

Naturally, the most important part of the remote control is the audio attenuation circuit which consists of an eight channel analog multiplexer, IC1, and an op amp, IC6. The attenuation is passive, performed by a voltage divider consisting of a 100k Ω resistor in series with the input signal and one of six shunt resistors or a transistor (for full attenua-

tion), which are individually selected by the multiplexer.

Whenever pin 13 of IC1 is selected, driving the input of IC4c low and consequently the output high, the transistor is switched on to shunt the audio signal to ground. At the highest volume level, pin 4 is low and no resistor is switched in to attenuate the signal. This output when low drives the output of IC4d high.

IC4d and IC4c are used to detect the maximum volume level and minimum volume level respectively and these are connected to a gating arrangement formed by the NAND gates IC3. These gates prevent the volume level from changing from the highest to the lowest level or from the lowest to the highest level. IC3 therefore prevents further clocking in the same direction if the maximum or minimum volume levels have already been reached.

If the counter is being clocked up and it is already at the highest level, the output of gate IC3b will go low forcing the output of gate IC3c high and inhibiting counting. Similarly if the counter is being clocked down when it is already at its lowest level, gate IC3d will go low and inhibit counting.

The attenuating signal from IC1 is buffered by a TL071 op amp connected as a voltage follower to provide unity gain. DC biasing of the op amp is provided by two 1M Ω resistors, one from ground and the other from the positive rail. So that this DC level will not upset the attenuator, capacitive signal coupling is used. The output of the op amp is also capacitively coupled to remove the DC bias.

As mentioned previously, power for the receiver is derived from the main DC (12-30V) supply of the TV set. This is filtered with a 470 μ F capacitor and regulated with a three terminal regulator. Although a 5V regulator is used, the output voltage is around 9V and this voltage increase is achieved as follows: Since the regulator supplies 5V between the GND pin and output, there will be 23mA flowing through the 220 Ω resistor. This current plus the quiescent current from the GND terminal (about 4mA) produce about 4V across the 150 Ω resistor. Consequently when the 5V of the regulator is added to this, the output voltage is about 9V.

The 0.1 μ F capacitor at the input of the regulator ensures stability, while the 22 μ F capacitor at the output provides improved transient response of the regulator.

Construction

Construction of the circuit involves three printed circuit boards. One PCB coded 83tv1c is used for the transmitter

We estimate that the current cost of components for this project is approximately

\$40

This includes sales tax.

BILL EDGE'S

ELECTRONIC AGENCIES

115-117 Parramatta Rd. Concord 2137
(Corner Parramatta Rd & Lloyd George Ave)
Telephone (02) 745 3077 (two lines)
117 York St. Sydney Phone 29 2098

Mail Orders:
PO Box 185
Concord
2137

	NSW & ACT ONLY	VIC. SA. QLD. TAS. WA. NT
\$1	— \$ 9.99	\$1 — \$ 9.99
\$10	— \$24.99	\$10 — \$24.99
\$25	— \$49.99	\$25 — \$49.99
\$50	— \$99.99	\$50 — \$99.99
\$100	or more	\$100 or more

bankcard
welcome here

TRADING HOURS
BOTH STORES
Mon-Fri 9 am-5.30 pm
Thursday 9 am-8 pm
Saturday 9 am-12 pm

All heavy or bulky items (over 20kg) sent Comet Road Freight \$12.00 anywhere in Australia.

New from MicroBee... the 'PLUS' Series... from the new 16K PLUS to the 64K PLUS (with optional disk system) MicroBee now offers you a range of microcomputers with capabilities far greater than anything else in a similar price range.

The 16K PLUS and 32K PLUS are both stand alone personal computers based on the powerful Z-80 microprocessor, with either 16K or 32K of CMOS RAM. These low power RAMS allow programs to be held in memory by using the Battery back-up system now standard on the new MicroBee PLUS series.

Standard features of the MicroBee PLUS Series now include:

- RS232 serial interface.
- Parallel interface.
- Battery back-up.
- Programmable character generation.
- Cassette interface with I/O at either 300 or 1200 baud.
- 16k of BASIC in ROM.
- Selected continuous memory.
- Full size 60 key QWERTY keyboard layout.

HARDWARE:

XE5000 MicroBee 16K PLUS	449.00
XE5100 MicroBee 32K PLUS	549.00
XE5200 MicroBee 64K PLUS	699.00

SOFTWARE:

MicroBee CASSETTES

XE6000 Graphic Games	9.95
XE6010 Missile Wars	9.95
XE6020 PCG Tutorials	14.95
XE6030 Space Invaders	9.95
XE6040 Concentration	9.95
XE6050 Chess	9.95
XE6060 Typing/Solitaire	9.95
XE6070 Target	9.95
XE6080 Lunar Lander/Hurkle	7.95

XE6090 Star Shoot/Hangman	7.95
XE6100 Biorhythm/Calendar	9.95
XE6110 Eliza	9.95
XE6120 Kids Game	9.95
XE6130 Master Mind/Nim	9.95
XE6140 Chase/Wumpus	9.95
XE6150 Z Trek	9.95
XE6160 "Esc" Key	9.95

SOFTWARE IN ROM:

XE6500 MicroBee Editor/-Assembler	59.50
XE6600 MicroBee Word Bee ROMPAK	89.50
XE6700 MicroBee 5.1 Basic Upgrade	20.00

MicroBee



Bee Seeing You In The New Year

bankcard
welcome here

MicroBee
Phone Orders
(02) 29 2098



"NOT MORE SPEAKERS!"

With these new additions to our range, we have nearly 90 different speakers in stock. This gives us the largest range in Australia.

We are now stocking the fabulous range of Australian made Etone speakers. Etone drivers have the advantage over other speakers in that they may be reconnected if damaged.

We are only carrying in stock some of their HiFi speakers because they have such a large range of woofers and PA speakers we simply could not carry them all. If you require any Etone speakers other than those listed we can order them in for you upon receiving a deposit.

NEW SPEAKERS

CE2120	Eton 10" Woofer, 80WRMS No 118, Freq Resp 30-4,000Hz, Res freq 30Hz	\$49.00
CE2350	Etone 10" Twin Cone Wide Range (suitable for disco) 80WRMS No 119, Freq Resp 30-12,000Hz, Res Freq 30Hz	\$51.00
CE2140	Etone 12" Woofer, 100WRMS No 518, Freq Resp 30-4,000Hz, Res Freq 30Hz	\$56.00
CE2360	Etone 12" Twin Cone Wide Range (suitable for disco) 100WRMS No 519, Freq Resp 30-12,000Hz, Res Freq 30Hz	\$59.00
CE2200	Eton 15" Woofer, 100WRMS No 418, Freq Resp 30-3,500Hz, Res Freq 30Hz	\$99.00
CE2017	Novik Horn Tweeter 5" x 2 1/2", Freq Resp 2KHz-80 Watts	\$9.90
CE2303	5" Widerange speaker (Huge magnet) Freq Resp 80-15KHz 30 watts	\$14.50
CE2318	6" Coaxial Speaker (built in tweeter) Freq Resp 90Hz-20KHz 4/8 ohms 40 watts	\$21.90 each
CE2320	6" Triaxial Speaker (built in tweeter and midrange) Freq Resp 70Hz-20KHz 80 watts	\$35.00 each
CE2323	9x6" Triaxial Speaker (built in tweeter and midrange) Freq Resp 40Hz-20KHz 60 watts	\$35.00 each
CE2322	9x6" Twin Cone Speaker, Freq Resp 40Hz-15KHz 40 watts	\$16.90 each
CE2022	Flat Piezo Tweeter, Over 100 watts handling, No crossover needed, Freq Resp 4KHz-40KHz, Two drivers in each speaker, Extremely wide dispersion, Beautiful looking	\$26.00
CE2803	3" replacement speaker for radios, clock radios etc.	\$3.95

UPGRADED TRANSISTOR ASSISTED IGNITION KIT

See EA Jan. 1983

This new addition gives longer spark duration and more reliable operation. Our kit includes a die cast box for less interference and to keep out the nasties like water, dirt, grease and oil. STILL ONLY **\$35.00** KEI825

Why not add a Breakerless Ignition kit as well for a full reliable electronic ignition system.

\$19.50 KEI850

ETI 1508 TRAIN CONTROLLER KIT

See ETI Dec. 82

Short Form Kit. We supply PCB, all components. Quality C&K flattened toggle mini switches, relay. Single track unit, double for twin track. PL30/60VA Transformer ME2849 \$21.90 extra.

\$39.50 KE7000

ETI461 Balanced INPUT PREAMP KIT

See ETI Dec. 82

Short Form Kit. PCB and components only.

\$19.50 KE7001

WE ARE THE KIT SPECIALISTS

Beware of others advertising complete kits which don't supply everything you need to finish the job.



NEW PRODUCTS

KEI940	0-30v Power Supply kit	\$48.50
KEI016	Boggle Goggles kit	9.50
KEI055	Super Siren kit	22.00
KEI088	Driveway Sentry kit	32.00
CE2082	Philips ADO210/Sq8 Dome Midrange	19.50 Save
HE1442	Instrument case like Pactec	13.50 \$12.50
HE2414	TO18 Round Heatsink	65
KE9022	25 mhz Crystal	6.50
LE6810	75 ohm TV lead, 4 metre	4.20
LE8777	Alarm Tamper switch	1.90
SE2486	Watch Battery E-Ready 357	3.99
ZEI998	TRIAC, 15A, 500V SC250E Stud	4.50
ZE5390	MM5290N	2.95
TE4500	Micro Shears - Italian	8.50
TE4810	Electronic Snipper - Italian	12.50
CE8204	100 watt Stereo Fader Control	17.50
WE2243	10 way Rainbow cable	90 mt
WE2244	16 way Rainbow cable	1.50 mt
WE2247	24 way Rainbow cable	2.20 mt

DISCONTINUED KIT SPECIALS

KEI000	Selectalotto	\$17.95	Save \$5.00
KEI010	Photon Torpedo	19.50	Save 7.00
KEI025	Pools/Lotto Selector	14.95	Save 5.00
KEI027	Sandglass Timer	22.00	Save 4.50
KEI050	PC Birdies	9.95	Save 5.00
KEI075	ETI Drum Machine	69.00	Save 20.00
KEI076	Sequencer for above	12.50	Save 7.00
KEI090	Speed Sentry	8.00	Save 4.00
KEI125	Versatile Timer	34.50	Save 10.00
KEI410	TV Cro Adaptor	29.90	Save 10.00
KEI420	Dual Trace Switch for Cro	49.00	Save 16.00
KEI877	Low Ohms Meter	35.00	Save 10.00
KEI950	ETI581 = /-15v P/Supply	5.50	Save 4.00
KE2050	Stylus Timer	32.00	Save 13.00
KE2075	Loudspeaker Protector	16.00	Save 10.00
KE3000	EA Electronic Organ	53.00	Save 15.00
KE3041	ETI498 PA Preamp	89.00	Save 20.00
KE4075	LCD Digi Capacitance Meter	49.90	Save 10.00
KE4090	Audio Oscillator	65.00	Save 10.00
KE4150	On Screen Graphic Analyser	89.00	Save 30.00
KE4350	ETI479 Bridging Adaptor	6.95	Save 3.00

ALL PRINTED CIRCUIT BOARDS STOCKED FROM 1975

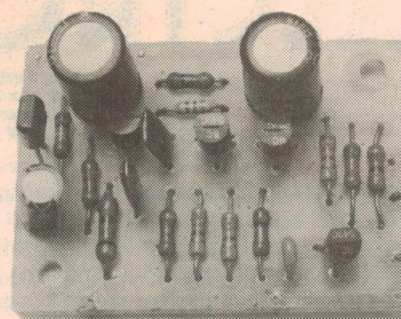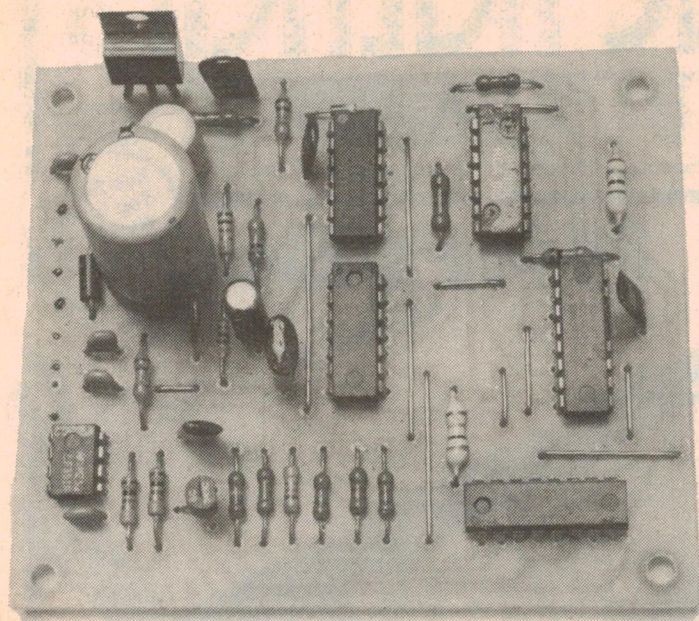

The demodulator (left) and amplifier PCBs are shown here approximately actual size.

and is housed in a plastic utility box measuring $28 \times 54 \times 83\text{mm}$. Of the two other PCBs, one coded 83tv1b and measuring $37 \times 53\text{mm}$ is the amplifier while that coded 83tv1a and measuring $79 \times 93\text{mm}$ is the decoder.

Start construction on each PCB by placing all the links, resistors and diodes into position. Make sure that the diodes are pointing in the correct direction. When soldering the ICs make sure that they are oriented correctly and that the power supply pins are soldered first, with the barrel of the soldering iron connected to the ground track of the PCB. Again when placing the transistors and capacitors in position ensure they are oriented correctly. The $1000\mu\text{F}$ capacitor in the transmitter is bent over and lies across the PCB, so ensure that there is enough lead length to facilitate this.

The $0.47\mu\text{F}$ tantalum capacitors in the transmitter are bent over sideways so that the 9V battery can be placed on top of the PCB and clear the lid. In fact this is the way in which the PCB is held within the case. The battery provides very little

clearance between the lid and so holds the PCB in place. Holes for the two IR LEDs should be drilled as well as those for the switches, after the Scotchcal label has been placed onto the front panel.

Wiring to the transmitter switches can now be completed and the switches secured to the lid. Note that these are oriented sideways to allow clearance for the battery. Place the PCB into the case, insert the battery with some foam insulation, and screw the lid down. The transmitter is now complete.

When the receiver PCBs have been completed, the TV sound control is ready to be tested. It is not recommended that you test the unit within the TV set initially since many TV sets have a live chassis, rendering any testing in this situation dangerous. Consequently it is advisable to ensure the circuit is operating as expected before installation into the TV set.

Wire the interconnecting leads between the two PCBs and connect a voltage between 12 and 30V DC from a suitable power supply to the decoder


PCB. Check that the voltage regulator is supplying around 9V and that all the ICs are receiving power.

To check that the receiver is operating correctly and attenuating the signal, it will be necessary to connect in a sound source and monitor it after attenuation. A suitable source would be from the eaphone socket of a radio, or a tone from a function generator connected to the audio input of the decoder PCB. Monitoring can be done by listening with an earphone at the audio output of the decoder or by amplifying the signal and listening with loudspeakers. Alternatively, the tape monitoring facilities provided on most amplifiers can be used by switching to tape monitor and connecting the audio output to the Tape input and the audio input to the Tape output.


When the Down button is pressed, the receiver should attenuate the signal at a rate of one step every 0.5 seconds. Pressing the Up button should increase the volume until maximum volume is reached. At first switch-on of the receiver the volume should be at mid volume setting with pin 12 of IC1 selected. Pin 9 of IC1 should be low and pins 10 and 11 high. At maximum volume, pins 9, 10 and 11 are all high and pin 4 is selected, while at minimum volume the pins are low and pin 13 is selected.

If the unit does not appear to operate correctly, check all the PCBs for broken or shorted tracks, incorrectly oriented components, bad solder joints and power supply connections to the ICs. If the sensitivity appears low, the gain can be increased by increasing the value of the $47\text{k}\Omega$ resistor at the anode of the photodiode. Values of up to $470\text{k}\Omega$ can be used. Do not increase the value to such an extent as to cause the circuit to trigger on ambient light.

The amplifier PCB requires a shield to protect the sensitive circuitry from the high level of line flyback pulses generated by the TV circuitry which would otherwise render the circuit in-

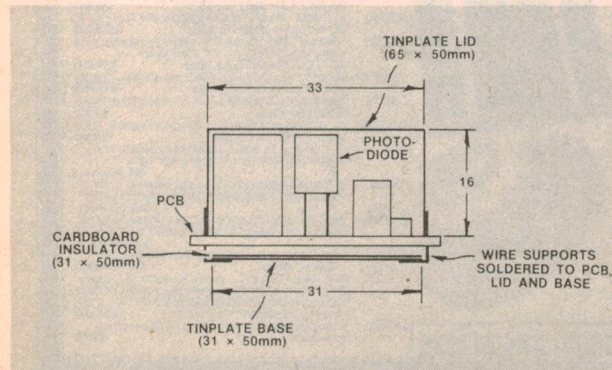

This diagram shows how the amplifier module is shielded using tinplate sheeting. Note that shielding is used on both sides of the PCB.

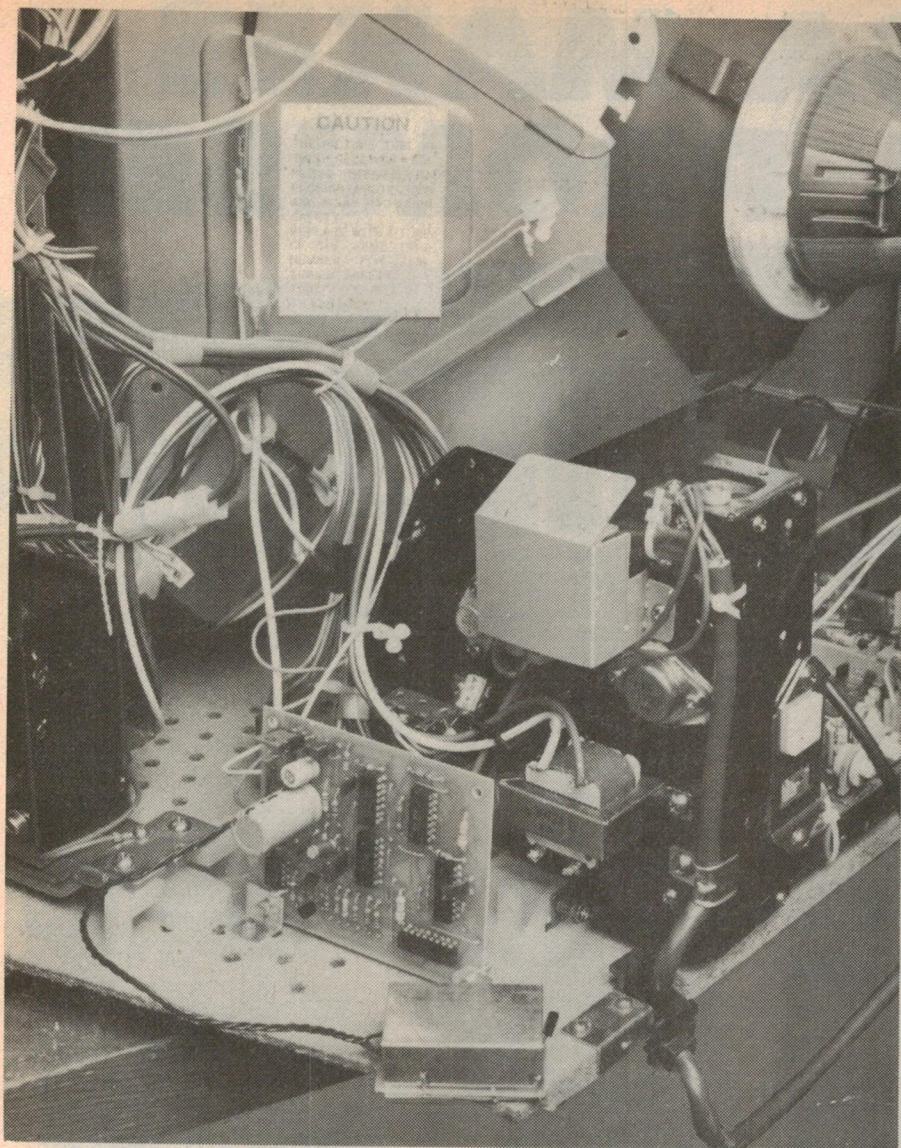

Power for the receiver circuitry is derived from a suitable 12-30V supply within the TV set. The photodiode should face through a hole in the rear of the cabinet, so that it receives energy reflected from the wall.

operative. We used tinplate sheeting salvaged from a tin can to make the shield. Use the diagram to aid you in construction of the shield. Wire links are used to mechanically support the shield above and below the PCB and these pass through the pads provided. There are three pad positions on each side of the board and all are connected to the ground rail rendering the shield earthed when soldered to these points.

The decoder PCB can now be installed into the TV cabinet. Before removing the rear cover of the TV set ensure that the power plug is removed from the wall socket to prevent electric shock. Note that many modern TV sets have a live chassis. Do not work on these sets when they are switched on under any circumstances. The PCB should be secured to the chassis with suitable angle brackets in a position that is close to the screened leads from the volume control potentiometer. We mounted our

decoder board vertically on two angle brackets and intercepted the audio lead from the wiper of the volume control at a point close to the decoder PCB.

Depending upon the positioning of the TV set, whether it is free standing with wall space behind it or wall mounted, the shielded receiver will need to be mounted at the front of the TV set or preferably at the rear (provided that light from the transmitter can be reflected from the wall behind a free standing TV). The receiver should be supported using suitable brackets and screws onto a convenient structurally solid point within the TV. With a front mounted receiver, it should be located so that a 4mm hole can be drilled in front of the TV opposite the IR photodiode and preferably in an inconspicuous position. Similarly for a rear mounted receiver, a 4mm hole should be drilled for the photodiode. The photodiode should not protrude from this hole.

PARTS LIST

- 1 PCB coded 83tv1a, 79 × 93mm
- 1 PCB coded 83tv1b, 37 × 53mm
- 1 PCB coded 83tv1c, 61 × 45mm
- 1 plastic utility box 28 × 54 × 83mm
- 1 216 9V battery and battery clip lead
- 1 tinned steel sheet, 53 × 120mm
- 2 C&K momentary contact switches (C&K preferred)

SEMICONDUCTORS

- 1 4051 single eight-channel analog multiplexer/demultiplexer
- 1 4029 binary decade up/down presettable counter
- 1 74C14 hex Schmitt trigger
- 1 4011 quad two input NAND gate
- 1 4001 quad two input NOR gate
- 1 4093 quad two input NAND Schmitt trigger
- 1 4009, 4094 hex inverting buffer
- 1 7805 positive 5V three terminal regulator
- 1 TL071, LF351, CA3140 op amp
- 1 2N5485 N-channel FET
- 4 BC549 NPN transistors
- 1 BD681, BD263 NPN Darlington transistor
- 2 CQY89A IR LEDs
- 1 BPW50 photodiode
- 5 1N4148, 1N914 small signal diodes
- 1 1N4002 1A rectifier diode

CAPACITORS

- 1 1000μF/10VW pigtail electrolytic
- 1 470μF/35VW PC electrolytic
- 2 100μF/16VW PC electrolytic
- 1 22μF/16VW PC electrolytic
- 1 10μF/16VW PC electrolytic
- 1 1μF/25VW PC electrolytic
- 1 1μF/10VW PC electrolytic
- 2 0.47μF/10VW tantalum
- 6 0.1μF monolithic ceramic
- 1 .047μF metallised polyester
- 1 .022μF metallised polyester
- 1 .01μF metallised polyester
- 1 .0082μF metallised polyester
- 2 .0068μF metallised polyester
- 3 .001μF metallised polyester

RESISTORS (1/4W, 5%)

- 6 × 1MΩ, 1 × 220kΩ, 5 × 100kΩ, 1 × 82kΩ, 3 × 68kΩ, 2 × 47kΩ, 1 × 33kΩ, 1 × 18kΩ, 2 × 15kΩ, 8 × 10kΩ, 1 × 5.6kΩ, 1 × 3.3kΩ, 2 × 2.2kΩ, 2 × 330Ω, 1 × 220Ω, 2 × 150Ω, 1 × 100Ω, 1 × 47Ω, 1 × 12Ω.


MISCELLANEOUS

Hook up wire, solder, mounting screws, brackets, etc.

NOTE: Components specified are those used in the prototype. Generally higher ratings can be used provided they are physically compatible.

OMEGA MAKES YOU A PROMISE!


**We aim to
inform you,
stimulate you,
excite and
entertain you
like no other
Australian
magazine.
Buy the latest
issue and see
if we don't
keep our
word!**

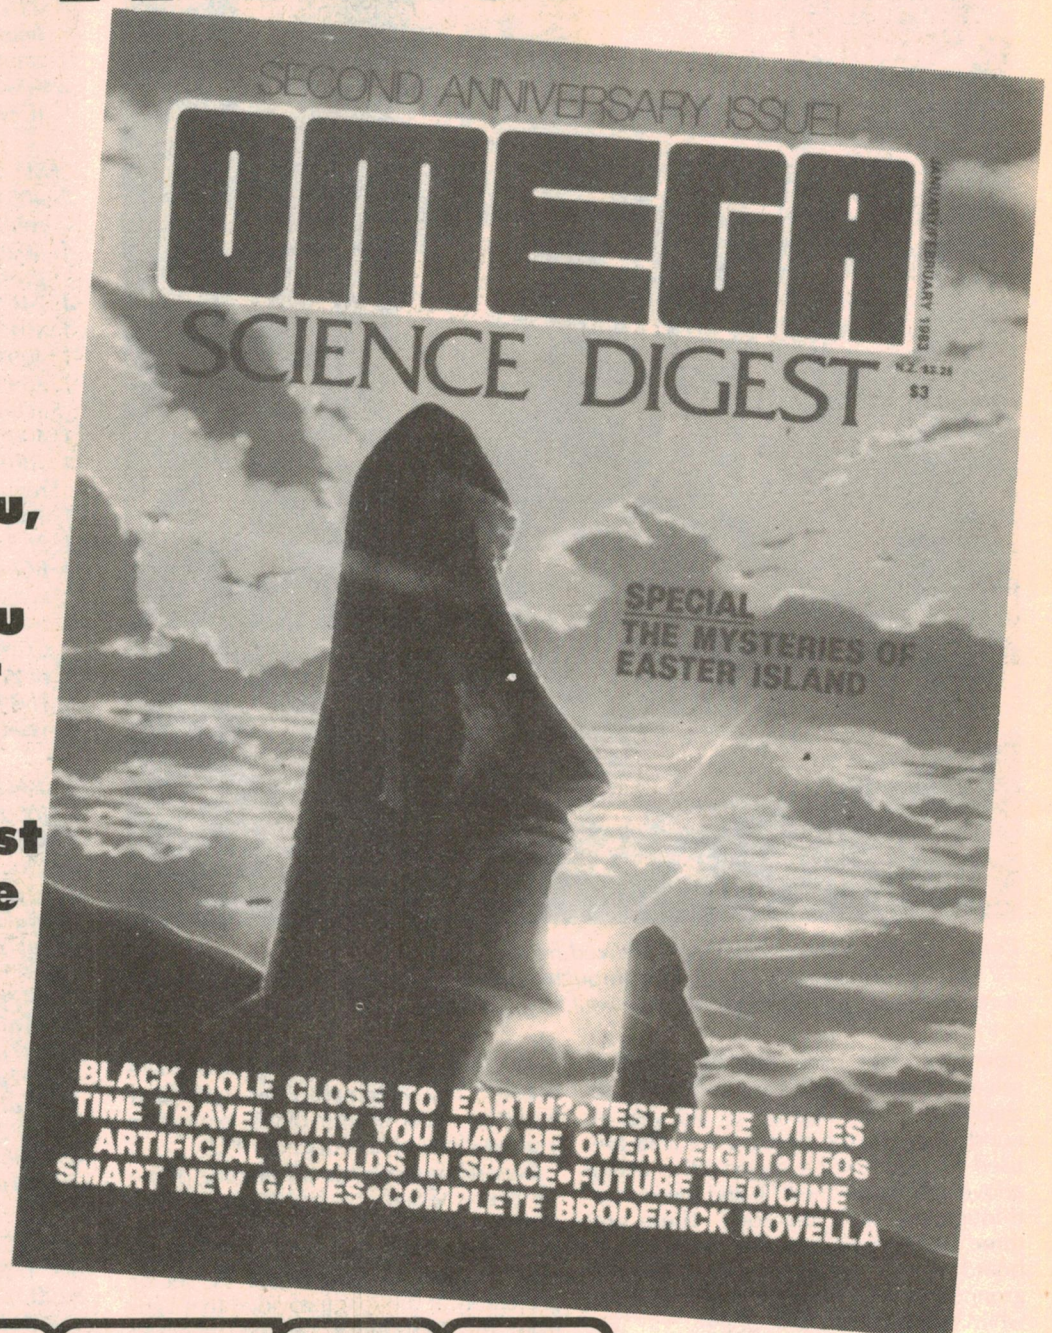



OMEGA

**ON SALE
AT YOUR
NEWSAGENT**

TOMORROW'S MAGAZINE TODAY

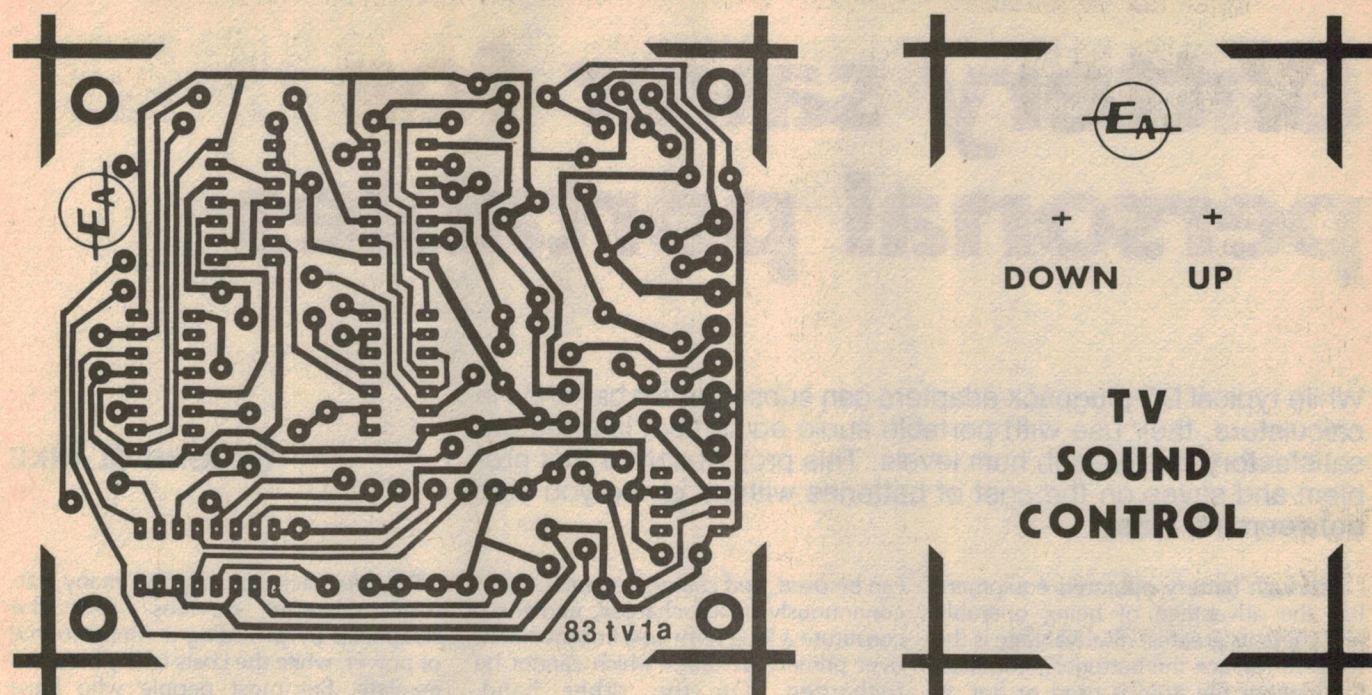

Here are actual size reproductions of the three PC artworks and the transmitter front panel.

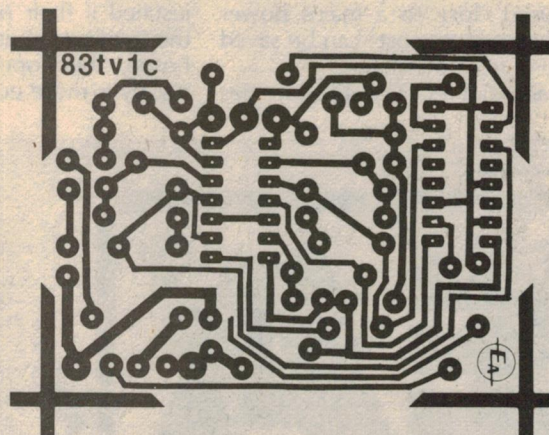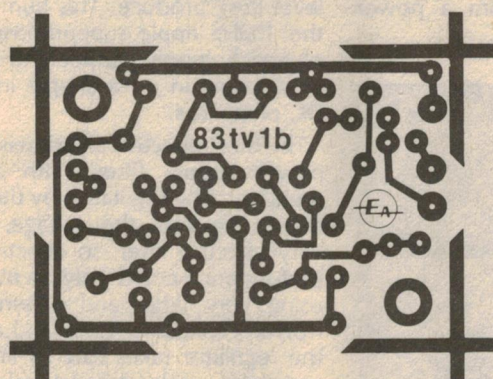

In either case, if the TV has a live chassis, in other words there is no power transformer, no screws should be exposed on the cabinet exterior since these may be live.

Wiring to the PCBs can now be completed. The audio lead from the TV volume potentiometer is intercepted and the attenuator on the decoder PCB connected in series with the line. The wiper from the potentiometer connects to the input of the attenuator while the output of the attenuator continues the audio signal back into the lead to complete the circuit.

The power supply connection to the TV set can be found by referring to the circuit diagram supplied with the TV set. Any DC voltage from 12 to 30V will be suitable and should be obtained from the main DC power supply of the TV circuitry.

When all wiring is complete and the

PCBs secured to the TV chassis, the cabinet back should be replaced and the unit tested. If not functioning satisfactorily, the power supply from the TV circuit could be derived from the wrong point or line flyback pulses could be entering the receiver. Ensure that there is a heavy earth lead running from the shield connection to an earth point in the TV.

In the case of a rear-mounted photodiode, the receiver obtains the light from the transmitter by reflection from the wall behind the TV set so the transmitter needs to be pointed towards the TV. Do not expect the transmitter to produce sufficient energy so as to allow light to reflect from one wall to another then to the photodiode.

We trust that you will enjoy having absolute control over the sound level of your most disliked TV adverts. Don't they look funny when soundlessly banging their gums together?

Stop Press

As this article went to press it was discovered that some recent model TV sets have a two-wire volume control which varies a DC voltage to a control pin on the sound IF detector IC. This means that the circuit published here needs to be tapped into the TV circuit at the input to the sound output stage. This will probably require the removal of a signal-coupling capacitor so that the input and output leads of the Sound Control can be connected.

An alternative and easier method is to reconfigure the Sound Control so that it directly varies the volume control DC level. The transmitter buttons then need to be swapped over to account for the fact that reducing the control voltage increases the sound level. Details of the modified circuit will be published next month.

Compact piggyback design:

Battery saver for personal portables

While typical DC plugpack adapters can substitute for batteries in calculators, their use with portable audio equipment is often unsatisfactory due to high hum levels. This project solves that problem and saves on the cost of batteries without giving you hum between the ears.

by JOHN CLARKE

Although battery operated equipment has the advantage of being operable anywhere its greatest disadvantage is the need to replace the batteries periodically, whether the item is used or not. In many cases, battery operated equipment is used close to a mains power point and so battery costs can be saved by powering from the mains.

Nickel cadmium rechargeable batteries

can be used, and charged periodically or continuously trickle charged, and these constitute a long term cost improvement over primary batteries which cannot be recharged. On the other hand, rechargeable batteries can only be justified if their portability is utilised. If the equipment is used mostly in the house, then operation from a power supply is more economical.

The plugpack has rescued many battery operated devices from the scrapheap by providing a cheap source of power, while the costs of dry batteries escalate. But most people who have tried a DC plugpack to power portable radios and cassette recorders have been very disappointed by the excessive hum level they produce. This hum is due to the 100Hz ripple superimposed on the plugpack supply output and is a common failing in most simple inexpensive DC plugpacks.

The most effective solution is to build a power supply fitted with a voltage regulator. The regulator, by the very fact that it regulates the voltage, acts as a very effective filter; so effective that its performance could only be matched by using very large and expensive electrolytic capacitors. Over and above this the regulator takes care of line voltage variations, and potential voltage variations due to changes in load, or output current.

Our plugpack regulator is housed in a small plastic utility box, glued onto the rear of an AC plugpack. The leads from the plugpack enter the regulator box and emerge fully regulated and without the ripple which causes hum. The voltage from the regulator is necessarily several volts less than the voltage available from the plugpack and so a 12V AC plugpack is a suitable choice.


Voltages available from the regulator can be selected from between 1.5 and 9V. This range is sufficient for virtually any piece of portable radio or audio equipment. At 9V the maximum current available before the regulation ceases is 350mA; at 6V, 430mA; and at 3V, 660mA. The regulator can be adjusted to any voltage required, by turning a small trimpot, or fixed resistors can be installed to provide a single preset voltage.



Our plugpack regulator eliminates the need for batteries and does away with the hum problems that can occur when audio equipment is used with a standard plugpack.

The plugpack regulator circuit is relatively simple and comprises an adjustable three terminal regulator, five diodes, and associated resistors and capacitors. A full wave bridge rectifier converts the AC voltage from the plugpack to pulsating DC and this is filtered to moderately smooth DC with the 470 μ F capacitor across the supply. For transient suppression, the 0.1 μ F capacitor is also included across the supply.

The remainder, and vital, part of the filtering is performed by the LM317T three terminal regulator which, as already hinted, also pegs the output voltage within very close limits over a wide range of input (line) voltage variations and output load (current) variations.

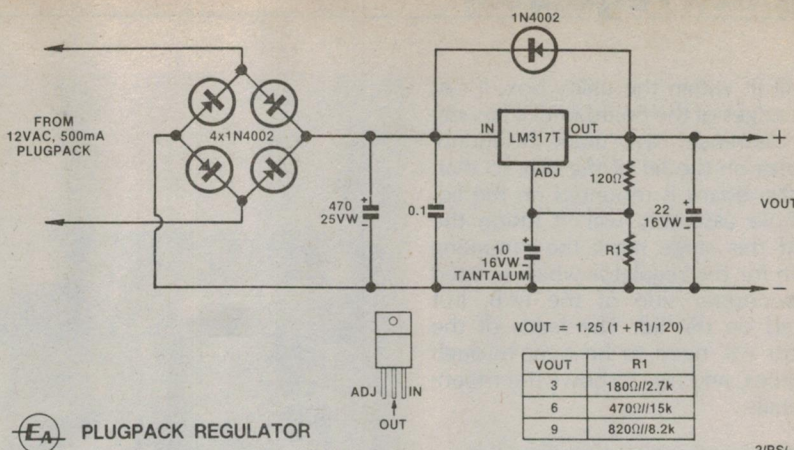

The plugpack regulator is based on the LM317T adjustable voltage regulator.

How it works

To provide a better understanding of how the regulator works we have prepared a much simplified diagram of it (Fig. 1). As we show it the LM317T consists of a power transistor in an emitter follower configuration, with the base being fed from the output of an operational amplifier. The input to the operational amplifier is taken from the output of the emitter follower — thus making it a feedback system — but, more specifically, it is the voltage developed across R2. The op amp monitors the voltage across R2 and adjusts the drive to the power transistor to keep the output voltage within tight limits.

The whole system is so adjusted that it strives to maintain a constant value of about 1.25V across R2 which means that, in turn, it also maintains a constant current through R2 and thus, by definition, the same constant current through R1. By selecting the value of R1 we can nominate the voltage which will appear between the "OUT" terminal and the negative rail, which will be 1.25V higher than the voltage across R1.

Let us now consider what happens if the output voltage (between "OUT" and negative rail) tends to vary, due to either variations in the input voltage or variations in the load current. Let's say the voltage tends to rise. This would have the effect of trying to force more current through the R2, R1 network and increasing the voltage across R2. But the feedback network will have none of this; it will immediately pull down the forward bias on the transistor, thus lowering the output voltage until the requisite 1.25V is restored across R2.

Similarly, if the voltage should tend to fall, the reverse corrective action would occur. This is a greatly simplified explanation of both the regulator circuitry and the manner in which it functions in the circuit, but it should give the reader

at least a basic grasp of what is involved. It also explains how the LM317T can precisely control the voltage between its output and "Adj" pins, while negligible current actually flows into or out of the "Adj" connection.

In practical terms, and reverting to our main circuit, R1 should be 744 Ω for a 9V output, 456 Ω for 6V and 168 Ω for 3V. The table on the circuit diagram shows the parallel combination of standard 10% resistor values to obtain these specific resistances. Alternatively a single multitrack 1k Ω trimpot can be used and adjusted for the correct voltage.

(The values of R1 have been calculated on the basis of the quoted centre voltage of 1.25 for the LM317T. The actual spread is from 1.2V to 1.3V and this, together with normal resistor tolerances,

could produce slightly higher or lower voltages. However, even under worst case conditions — assuming 5% tolerance resistors — the highest voltage would be about 13% high. Most appliances could cope with this without trouble but, in any case, typical variations would be much less than this.)

The 10 μ F tantalum capacitor bypasses the voltage at the adjust terminal to ensure a stable output of the regulator without transients. Similarly the 22 μ F capacitor at the output provides decoupling and transient suppression.

An RF bypass capacitor in parallel with the 22 μ F capacitor may be desirable in some cases, but this is unlikely. Most circuits designed for battery operation would already have such a capacitor across the supply input terminals, to cope with ageing batteries. If it is felt that such a bypass is needed, it could be conveniently wired across the input socket for this supply, which will be discussed in detail later.

Diode D1, is used to protect the regulator against supply voltages entering the output of the regulator. In normal circumstances this diode is unused as it is reverse biased. If a voltage higher than the regulator voltage is applied to the output when, say, a charged capacitor is connected, the diode conducts and shunts the current from the regulator.

That more or less completes the circuit description. There is not much to it, but it offers high regulation performance. The circuit is completely safe since the plugpack is double insulated and does not require earthing.

Construction

Construction is on a printed circuit board (PCB) coded 83ps1, and measuring 62 x 46mm. The PCB is housed in a plastic utility box measuring 28 x 54 x 83mm. This box is glued to the rear of the plugpack to make a small neat unit.

Start construction by checking that the





Fig 1

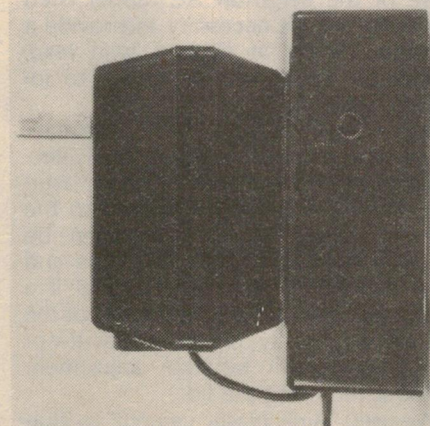

The regulator is glued to the plugpack.

PCB will fit within the utility box. If not file the edges of the board until it has sufficient clearance. Now mark the mounting holes on the lid of the box so that, when the board is mounted on the lid, the whole assembly will fit inside the box. At this stage mark the mounting position for the regulator which is fitted on the copper side of the PCB, but mounted on the lid. The leads of the regulator will need to be bent through 90 degrees, and Fig. 2 shows the mounting details.


PARTS LIST

- 1 PCB coded 83ps1, 62 x 46mm
- 1 plastic utility box, 28 x 54 x 83mm
- 1 AC plugpack 12V 500mA, Ferguson PPB12/500
- 1 DC plug and socket (see text)
- 4 6mm spacers
- 1 TO220 mica washer and bush
- 1 LM317T three terminal adjustable regulator
- 5 1N4002 1A silicon diodes
- 1 470 μ F/25VW axial electrolytic
- 1 22 μ F/16VW PC electrolytic
- 1 10 μ F/16VW tantalum
- 1 0.1 μ F ceramic
- 1 120 Ω 1/4W resistor
- 1 1k Ω multi-turn trimpot (see text)

MISCELLANEOUS

Nuts and screws, solder, grommet, polarised figure-8 flex if needed (see text).

NOTE: Components with ratings higher than specified may be used, provided they are physically compatible.

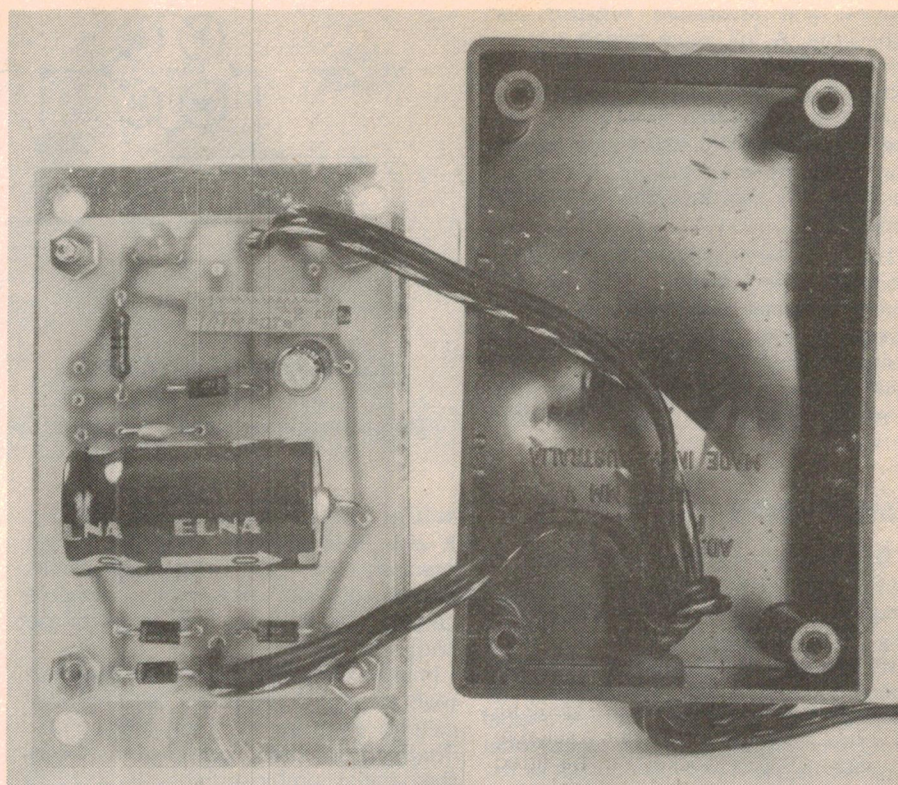

The PCB is mounted on the metal lid of the case using 6mm spacers.


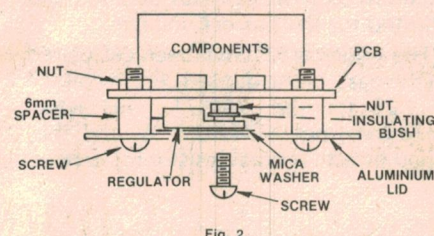


Fig. 2

The voltage regulator is mounted using a mica washer and insulating bush.

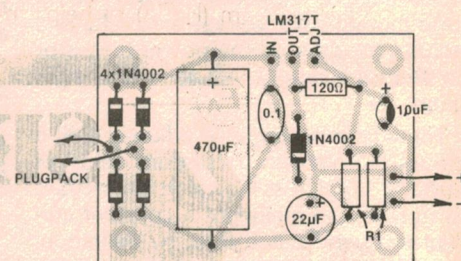

Follow this component overlay diagram.

Drill holes for these mounting positions, and also a hole at the end of the plastic box suitable for a small grommet. Deburr all the holes, particularly around the regulator mounting hole. This is to prevent swarf punching through the mica insulating washer.

Insert and solder all the components into the PCB, making sure that they are oriented correctly. Solder the regulator to the underside of the PCB and bend the leads so that it can be secured to the case lid. Place a smear of heatsink compound on both sides of the mica washer and then bolt the regulator to the case lid, as shown in Fig. 2.

While most DC plugpacks are fitted with an output lead and connector, some, such as the Ferguson AC plugpack PPB12/500, are fitted with screw terminals. If your plugpack has a fitted lead this should be cut short and wired to the

AC input of PCB. The remaining lead and connector can then serve as the output lead for the regulator circuit. If your plugpack has no fitted lead, as in the case of the Ferguson AC model cited above, it will be necessary to provide a suitable length of figure-8 twin lead, preferably with a colour streak to indicate polarity.

Before mounting the PCB on the standoffs, check that the regulator is electrically isolated from the lid by measuring with a multimeter, switched to the "ohms" range. Now the lid can be secured onto the plastic box base and the regulator is ready for testing. If a trimpot is used, a hole in the side of the plastic box directly opposite the screw of the trimpot will facilitate adjustment without removing the lid.

We used "Airfix plastic cement" to glue the back of the plugpack to the base of

the box. Before glueing, roughen the mating surfaces with a file so that the glue will have sufficient "key" to the plastic. While the glue is curing clamp the two pieces together.

Connect a multimeter on the DC volts range and plug the plugpack into the mains and switch on. The voltage should be as set by R1. If a trimpot is used adjust it for the required voltage. Now the regulator is ready to be put into service.

The low voltage plug to be used at the end of the regulator lead will depend on the matching socket already fitted to the appliance to be powered or, if one is not fitted, the type which is most easily fitted. There are four popular types. There is the audio jack type normally used for earphone connections, which comes in two sizes; 2.5mm and 3.5mm. If one of these is contemplated, make sure that it cannot be confused with any existing

socket on the appliance.

The other type is power plug with a hole down the centre which mates with a pin electrode on the socket. These come in two sizes also; 2.1mm and 2.5mm. Both types of socket have the facility to break one connection when the plug is inserted. This is commonly used to isolate the battery when the external power supply is plugged in.

Some appliances have an external power inlet socket built into the unit so a suitable plug with the correct voltage and polarity can be inserted into the socket. To make sure that the correct polarity is applied, check with the manual or open up the case and check polarity by following the wires to the battery terminals. Generally the red wire is positive and the black negative, although this is not necessarily the case.

Neither type of socket, as fitted to various appliances, is necessarily always wired in the same way. In the case of the power plug and socket, for example, the outer conductor is frequently positive, but some manufacturers adopt the opposite convention.

For those appliances without an external power socket one will have to be installed. Open the case and find a suitable free area where a socket can be fitted without fouling when the lid is replaced. Drill a hole for the socket, and mounting holes if needed, and mount the socket. Use the circuit diagram (Fig. 3) to help

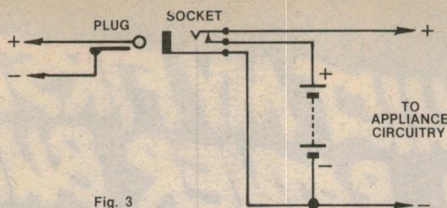


Fig. 3: This circuit disconnects the internal battery when external power is used.


We estimate that the current cost of parts for this project is

\$14

This includes sales tax but does not include the price of the plugpack.

you in wiring the socket from the battery connections. When complete the lid can be replaced and the plug connected to the regulator leads.

Although we have recommended a 12V AC plugpack, this is by no means the only power source that can be used. If voltages below 6V only are required then a 9V 200mA DC plugpack can be used and this constitutes a considerable saving over the 12V AC plugpack. Alternatively, the plugpack regulator can be

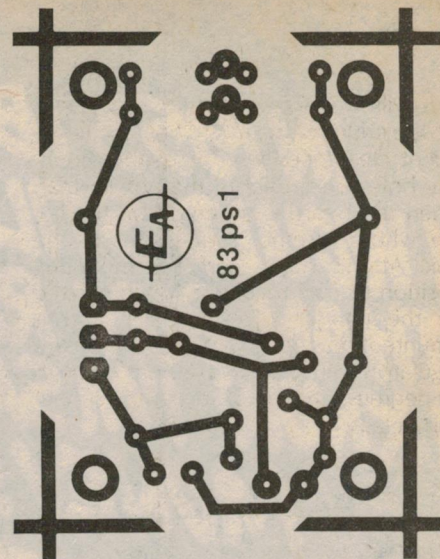

The full size printed circuit board pattern is shown above.

used in cars by tapping the 12V via the lighter socket. In either case, the rectifier diodes are unnecessary and the voltage is applied to each side of the 470μF capacitor.

Over all, the circuit has proved to be both reliable and effective, with no audible hum from the audio equipment. In fact a similar unit has been powering a portable radio for patients in the intensive care ward of Concord Repatriation Hospital for several months.




Fig. 1.




Fig. 2.




Fig. 3.

SERVICE MANAGERS

Choose ROYEL for high reliability soldering and desoldering



RE800-3
'SERVICE STATION'

Phone for a demonstration in your own premises now!

Fig. 1. CT6 Miniature Soldering Pencil. 40 Watts regulated power, 3mm tip dia. CT7 (5mm tip) optional.

Fig. 2. CT200 Desoldering Tool. Foot Switch operates integral vacuum pump.

Fig. 3. AL130. Removes or replaces multi-pin packages in seconds at controlled temperature.

This Service Station provides both electrostatic protection and independent, direct-reading, electronic feedback temperature controls for both soldering and desoldering.

It will allow service technicians to avoid many of the problems which lead to customer dissatisfaction, such as

- Electrostatic component damage
- Poor soldering
- Lifted pads/tracks
- Heat damaged components
- Burnt insulation.

ROYEL

Royston Electronics

N.S.W. (02) 709 5293 Q.L.D. (07) 277 4311
VIC. (03) 543 5122 S.A. (08) 42 6655
TAS. (002) 34 2233 W.A. (09) 381 5500

S382

IN 1953 I BUILT MY FIRST KIT...
I WOULD STILL RATHER BUILD A KIT
THAN BUY READY-MADE - BECAUSE
I KNOW I'M SAVING
MONEY!

ASK FOR YOUR
FREE COPY OF
OUR ALL NEW

KIT
CATALOGUE!

BUILD A DICK SMITH KIT



PLAYMASTER AM/FM TUNER

Professional quality AM/FM tuner with digital frequency readout AND digital clock! The tuner module is pre-built and aligned so all the hard part is done for you! Complete kit - everything supplied including our exclusive step-by-step instruction manual.

SEE DETAILS AT RIGHT

NEW 30volt/1amp ★ ★ ★ ★ ★ variable power supply

A truly functional project giving a range of voltages from 1.3V to 30 Volts. The supply also has a current capability of 1 amp complete with variable current limit.
K 3475

See ETI Dec. 82

ONLY \$59⁵⁰

OUR MOST POPULAR
KIT EVER!!!

PLAYMASTER MOSFET AMP



★ Cat K-3515.
See EA Jan/81

This 'Top of the line' Amplifier with a huge 50W per channel has just about everything you'll need in an amplifier! It's equivalent to units costing two and three times as much with features like:

- Full speaker switching between two sets of speakers (either, both or neither).
 - LED indication of input selection
 - Full tape monitoring facilities
 - Loudness and mute controls
 - State-of-the-art circuitry featuring power mosfets in the power amplifiers
 - Low distortion - typically less than 0.05% at normal listening levels.
- Comes complete with our exclusive step-by-step instruction manual.
High performance - up to the minute design - looks fantastic - and easy to build! What more could you ask for? The price?

COMPLETE
WITH
PROFES-
SIONALLY
DESIGNED
FRONT PANEL

★
UPGRADE
YOUR HI-FI
NOW FOR
ONLY

CAPACITOR DISCHARGE SAVE \$\$\$ IGNITION



This has got to be the best value CDI available. Your car will be easier to start - when cold or hot, your plugs will last longer, keeping your car in tune and using less petrol. This CDI will pay for itself in no time at all! SEE EA JULY 75.
Cat. K-3280

\$29⁵⁰

GREAT
VALUE
AT
ONLY \$175

3 DIGIT LED

DICK SMITH DELUXE COUNTER


The experimenter's delight! Every hobbyist at some time needs a counter. Here's one that won't break the bank. A deluxe fibreglass PCB with all counter components are supplied — and you can use this as a base for a huge number of projects. Operates from 5 to 15V supply. Exclusive to Dick Smith Electronics, with our own specially prepared instruction manual showing not only how to build it, but a number of experiments too!

Cat. K-3451 **\$29⁵⁰** **WOW!**

YOUR OWN DISCO LIGHTING! DISCO STROBE

Now's your chance to put one of these great Disco Strobes together yourself! This kit is quite simple to build, but it does use high voltages, so experience is most definitely required. The flash rate of the unit is variable from 1 flash/sec to 20 flashes/sec. Comes complete with metalwork, reflector and perspex cover. SEE ETI SEPT. '79


\$35⁵⁰



Cat. K-3152

PLAYMASTER AM/FM TUNER WITH CLOCK

Why buy one without FM?



Professional quality pre-built tuner module means all the hard part of this kit is done for you. Dick solved the problem of FM alignment by importing a pre-built and pre-aligned tuner module ready to be built into a project. EA came up with a design incorporating digital frequency readout that doubles as a clock. Easy to build, comes with instruction manual. Superb tuner sound at this low price will be hard to find anywhere else! Cat. K-3494 SEE EA NOV '78

\$139⁰⁰

SUPER SIREN

This siren has got an ear-splitting sound, yet it is compact and draws very little current. It uses a piezo-electric tweeter, which can be soldered directly to the PC board. Has many uses: as an equipment malfunction alarm, intruder alarm, car alarm (separately powered and not dependant on the car battery).

Cat. K-3505 **\$19⁹⁵**
SEE EA NOV '82



Transistor Assisted Ignition

Cat. K-3300

This kit incorporates circuitry with dwell extension which results in a hotter spark at high engine speeds and is compatible with modern electronic tachometers. Comes complete with a custom made aluminium box and all components are supplied.

SEE EA NOV '79


NEW METALWORK!

\$29

ELECTRONIC CRICKET

His name is Cudlipp and he imitates insects perfectly. He's bound to be a conversation piece — once he's been unearthed! Easily constructed, he speaks when others do and flashes his eyes impressively. But just try to find him! When all is quiet, he doesn't make a sound. SEE EA FEB '82. Cat. K-3397


\$12⁵⁰



LCD PANEL METER

An incredibly versatile and highly accurate panel meter with a highly visible LCD display with HUGE 15mm digits. Uses the famous 'Intersil' chip (as used in a huge number of professional test circuits), and its low cost makes it an extremely attractive and viable replacement for conventional analog equipment. The display is removable from the rest of the PCB for remote or angled placement. Full Scale: 200mV; Resolution: 100uV; Power Supply 5-15V DC. Cat. K-3450

\$29⁵⁰



LEDS & LADDERS

This has to be one of our most popular novelty kits. Can you climb out of the well without getting dumped back in? Easy to construct, comes complete with full instructions. A kit for all the family! Cat. K-3390

SEE EA JULY '80

\$16⁸⁰



SYSTEM 80 OWNERS!

JOYSTICK INTERFACE

Ever wish you could hook up a joystick to your system 80, so you could play games faster and with greater realism? Well, your wish has been answered. This little strain your piggy bank and can be assembled, plugs in, and away you go! Cat. K-3455
NOTE: Compatible with most US games software designed to work with the 'Alpha' joystick.

only \$37⁵⁰



NEGATIVE ION GENERATOR

BUILD YOUR OWN You've heard all about Negative Ion Generators and their benefits, now buy the kit and find out what it's all about. Our kit runs on 12V DC, you can put one in your car! Includes exclusive Dick Smith emitter head, power pack and tough moulded plastic case. Cat. K-3335 SEE ETI APRIL '81



\$38⁵⁰

FLUORO STARTER

Replace your old faulty starter NOW! Fits into the carcass of your old starter. Our smallest kit ever — even the instruction manual is small! And at our price it's a steal!!! Cat. K-3082

\$4⁵⁰

**MAKES TUBES
LAST MUCH
LONGER!!**



DRIVEWAY SENTRY

Turns home lights etc. on for predetermined time — activated by headlights. Self contained watertight diecast box — has internal relay that interfaces to control external functions. K-3305 Based on EA design, see EA Dec. 82

\$29⁵⁰

24 TUNES! LATEST MICRO TECHNOLOGY AUTOCHIME

Fantastic electronic doorbell that uses micro-processor technology! This unit plays one of 24 DIFFERENT tunes each time you press the front door button. It then automatically moves to the next tune in sequence. More, if you install a back-door button, it will play a particular tune only — to tell you which door to attend! Cat. K-3502

\$31



SEE EA
SEPT '79

electronic circuit breaker

CORE BALANCE RELAY

now only \$45⁰⁰

Here is a kit that will protect you AND your equipment. This portable unit features a tough moulded plastic case and comes complete with special front panel and double power outlet. At this low Dick Smith price, it doesn't cost the earth to play it safe! Cat K-3315 SEE EA APRIL '81



**was
\$52.00!**


DICK SMITH Electronics

bankcard
welcome here

Terms available to
approved applicants
through...



SEE PAGE 5 FOR ADDRESS DETAILS

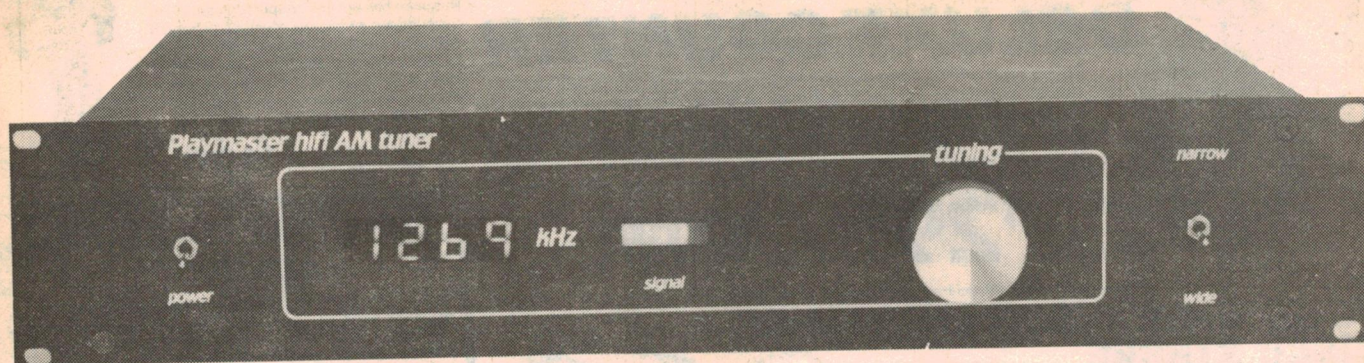

A high performance AM tuner: Pt. 2

Despite the circuit complexity, construction of our new Playmaster AM tuner is fairly straightforward. Most of the circuitry is contained on three printed circuit boards: the main tuner PCB, the main readout PCB and the LED readout PCB.

by JOHN CLARKE & GREG SWAIN

By now, you've probably got the parts for our new AM tuner together, ready to commence assembly. Before diving in with soldering iron "a-smoking", however, readers should note that some of the components used in this project can be damaged by careless or unnecessary handling.

In particular, the RF, IF and local oscillator coils should be handled carefully. Do not idly twiddle the slugs of these coils, as they are quite fragile and easily broken. The slugs are adjusted only during the alignment procedure (to be described next month), and then only using a plastic alignment tool.

Similarly, take care not to damage the toroids (they are quite brittle) and leave the CMOS ICs in their static-protection foam until you are ready to mount them in position. Because this is a fairly complex project, we suggest that you take your time and proceed carefully. Double-check each step for mistakes as you go, and pay particular attention to component orientation.

That's enough sermonising! Let's turn our attention to the construction details.

As already mentioned, virtually all the

circuitry is accommodated on three PCBs. The main tuner PCB carries the RF circuitry plus power supply components, while the remaining two boards carry the digital readout and signal strength indication circuitry. The latter two boards are soldered together at right angles, thus keeping internal wiring to a minimum.

We'll describe the assembly of each board in turn, beginning with the main tuner PCB.

Main Tuner PCB

This board is coded 82qr12a and measures 161mm x 178mm. Before actually mounting components, inspect the copper side of the board and repair any track faults at this stage. You should also check that all the holes have been drilled, and that the holes beneath the two 9817 coil positions are large enough to accept the alignment tool (ie, about 4mm). Holes are not required under the other coils, since these have only one slug and are tuned from the top.

The tuner PCB can now be assembled according to the parts overlay diagram. Mount the low profile components first

before moving on to the larger components. We used PC stakes for all external connections to the PCB and to terminate all those components which are only connected during the alignment procedure. These include resistors R1, R2, R3 and R4; capacitors C4, C5 and C6; and links LK1 and LK2.

Note that IC6 is a CMOS device, so observe the usual precautions. When soldering it into circuit, connect the barrel of your soldering iron to the earth track on the PCB (use a small clip lead) and solder the supply pins (7 and 14) first. Note also that IC1 is in a metal can package, so its leads will need to be splayed to suit the dual-in-line holes in the PCB.

Pay particular attention when mounting the 3-terminal regulators and the FETs, since they are easy to install the wrong way round. Pin connection diagrams for the FETs, regulators and transistors were published last month with the circuit diagrams.

The RF, IF and local oscillator coils are all polarised, and can only be mounted one way on the board since the two centre pins are slightly offset from centre. The main thing to watch here is that you use the correct coil type in each position. You'll find the type number on the side of the metal can.

The 8010 whistle filter coil is not polarised and can be mounted either way.

The toroid transformers are all wound identically. First, take three two-metre

lengths of 0.4mm (26 B&S) enamelled copper wire and twist them together using a hand drill until the twist approaches one crossover every 4mm. The triple-twisted (trifilar) wire is then wound on the toroid to give about 65 tight, closely-spaced turns. Terminate the start and finish off the winding by lightly twisting the ends together for a few turns.

The ends can now be trimmed to a length of 35mm and the insulation removed from the tip of each wire using a sharp knife. One end of the trifilar winding can now be terminated in each of the three start positions: S1, S2 and S3. The corresponding finish wires — F1, F2 and F3 — must now be identified using a multimeter and then terminated in the F1, F2 and F3 positions on the PCB.

It does not matter which end of the trifilar winding you actually choose as the start. What is important is that you identify which start and finish is actually S1 and F1 and so on. Note that S3 and F2 of coil L5 are connected together in a common hole on the PCB.

The toroid coils are secured using U-shaped wire links to clamp the coils in position. First, solder one end of the link in the hole provided and sleeve the wire with 35mm of spaghetti insulation. Now terminate the other end of the link in the opposite hole, pull it down tight over the coil with a pair of pliers, and solder it to the PCB.

The ganged capacitor can now be mounted on the PCB using three $\frac{1}{8}$ -inch Whitworth screws ($\frac{3}{16}$ -inch long). Do not use longer screws, otherwise they may short the capacitor plates. Solder wire links between the capacitor lugs and the PCB as shown on the overlay diagram. There are five connections in all — three to the fixed capacitor plates, and two to the separator plates.


Main Readout PCB

This board is identical to the main board used in the Digital Tuner Readout described in the October issue. It is coded 82fc8a and measures 160mm \times 125mm.


Note that IC2 is not used here, since it is only necessary for the counter to cover the broadcast band (520-1630kHz). Instead, link LK3 bypasses IC2 while link LK2 ensures that IC3 divides by 10. At the same time, the decimal points used in the original version are omitted so that the tuner displays the frequency in kHz rather than in MHz.

Because switch S1 is no longer used, all preload encoding links are now wired permanently into circuit. These include the three links adjacent to IC6 and IC7 that were previously shown dotted. As shown, the links encode the required 455kHz offset.

Start construction by assembling the

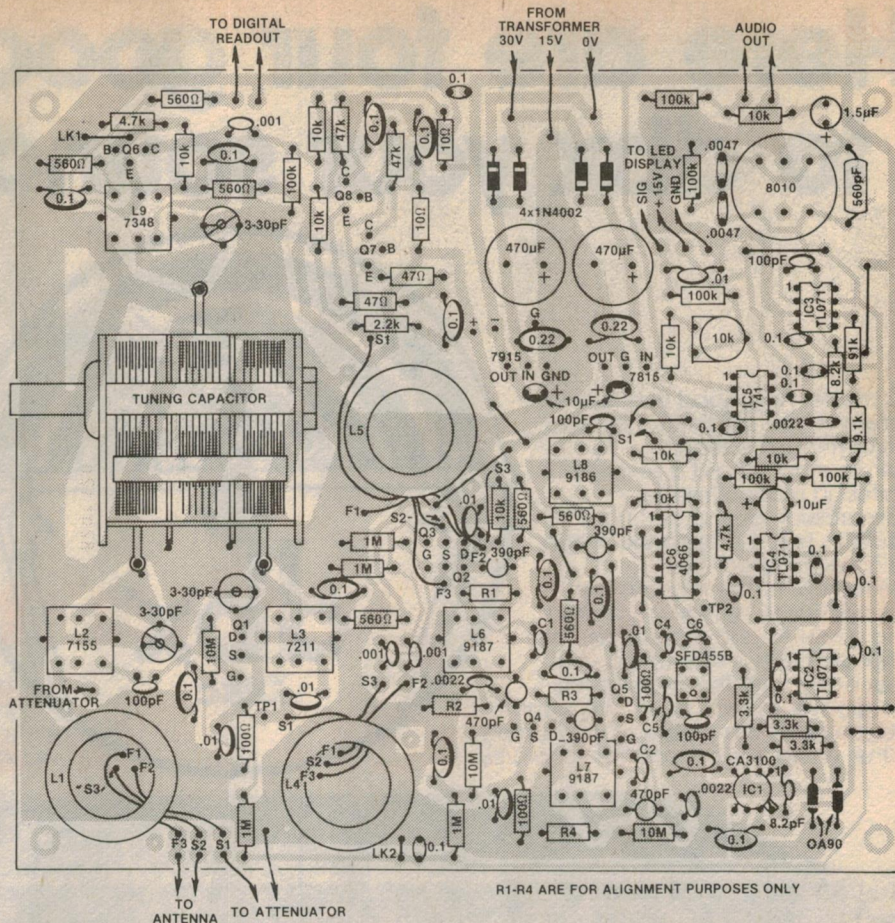

Above is the parts overlay for the main tuner PCB while below is a photograph of the fully assembled board. See text for coil winding details.

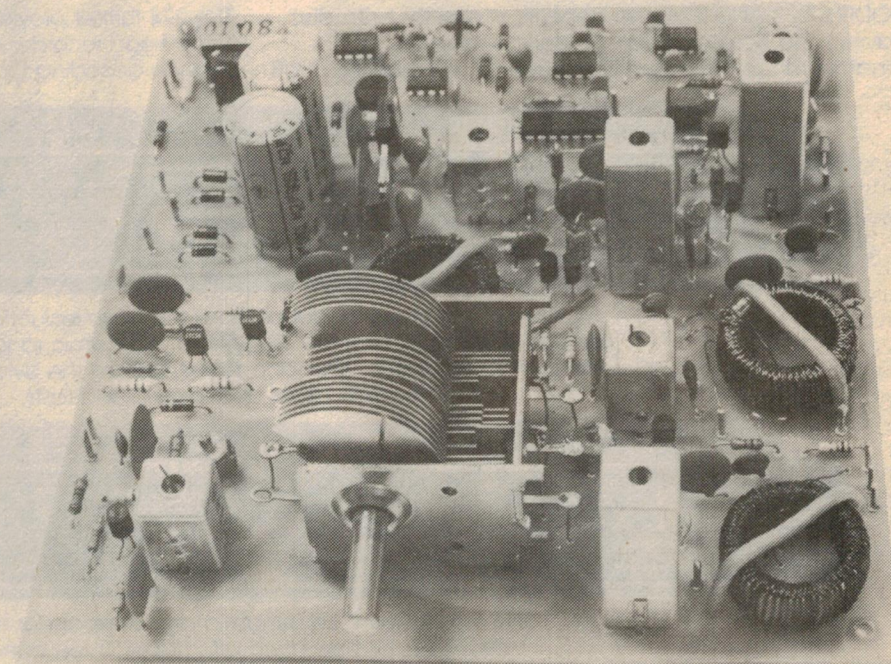

components on to the PCB according to the overlay diagram. All the ICs face in the same direction except for CMOS ICs 9, 10, 11 and 12. When soldering the CMOS ICs, solder the power supply pins (8 and 16) first to enable the internal

static protection diodes. As before, the barrel of the soldering iron should be connected to the earth track on the PCB with a small clip lead before soldering.


The CMOS ICs are recognised by their 4029 and 4511 type numbers.

Here are four good reasons to dbx your sound system

No matter how good your sound system is, you are limited by one major thing: the record. Every normal record is severely limited in musical range. Compression during cutting results in half the dynamic range being eliminated. The excitement of the music is lost. This applies to digitally mastered and direct to disc recordings. The other problem is something you hear every time the stylus enters the groove: surface noise. We went to the source of the problem, the cutting of the record. We encode the record by



compressing it 2:1. The decoder expands back in a mirror fashion. In this way, the vinyl record can achieve a staggering 90dB dynamic range, compared to 50dB achieved on normal high quality recordings. Only through dbx can you truly appreciate digital recordings. The range of dbx discs is growing. There are now over 150 titles available, including a wide variety of Classical, Popular and Jazz discs. Hear "The Empire Strikes Back" by John Williams, Vivaldi's "Four Seasons" and artists such as Oscar Peterson, Dave Brubeck and Almeida.

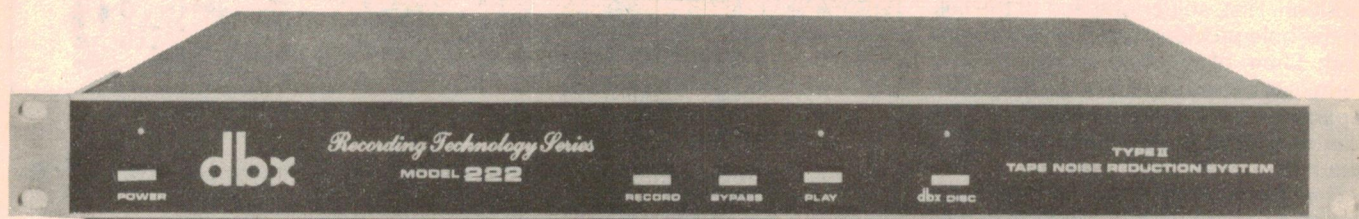

MODELS 222 AND 224. The benefits of dbx for both disc playing and home recording. Your cassette deck's dynamic range increased from 50dB to a staggering 80dB.

The 224 further provides simultaneous encode/decode for three head recorder off tape monitoring. Both models provide decoding for dbx discs.



MODEL 228. This new model provides the noise reduction and disc decoding capabilities of the 222/224 with dynamic range expansion for your non encoded discs and tapes. Restore the dynamic range of records, tapes and radio broadcasts.




The most advanced dynamic range expander ever developed is now more affordable. Three band expansion brings new life to your entire record collection.

Audio Engineers


342, Kent St., Sydney, Phone (02)29 6731.
Victoria: (03)44 32 95. Queensland (07) 369 9670
Western Australia 335 8273 S.A. (08) 293 4896

\$70.00
4 x 180
300


Please Send full details of ☐ Full range of dbx discs. ☐ The range of dbx equipment.
Name
Address

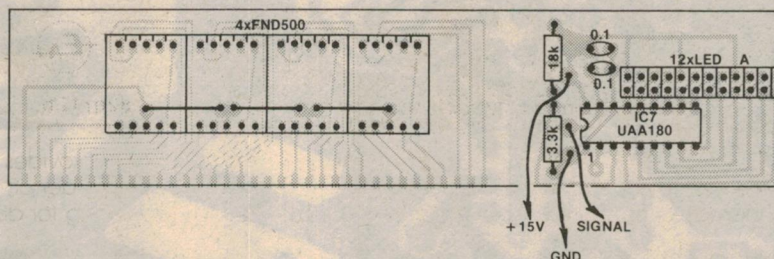

The various items of hardware can now be installed in the chassis according to

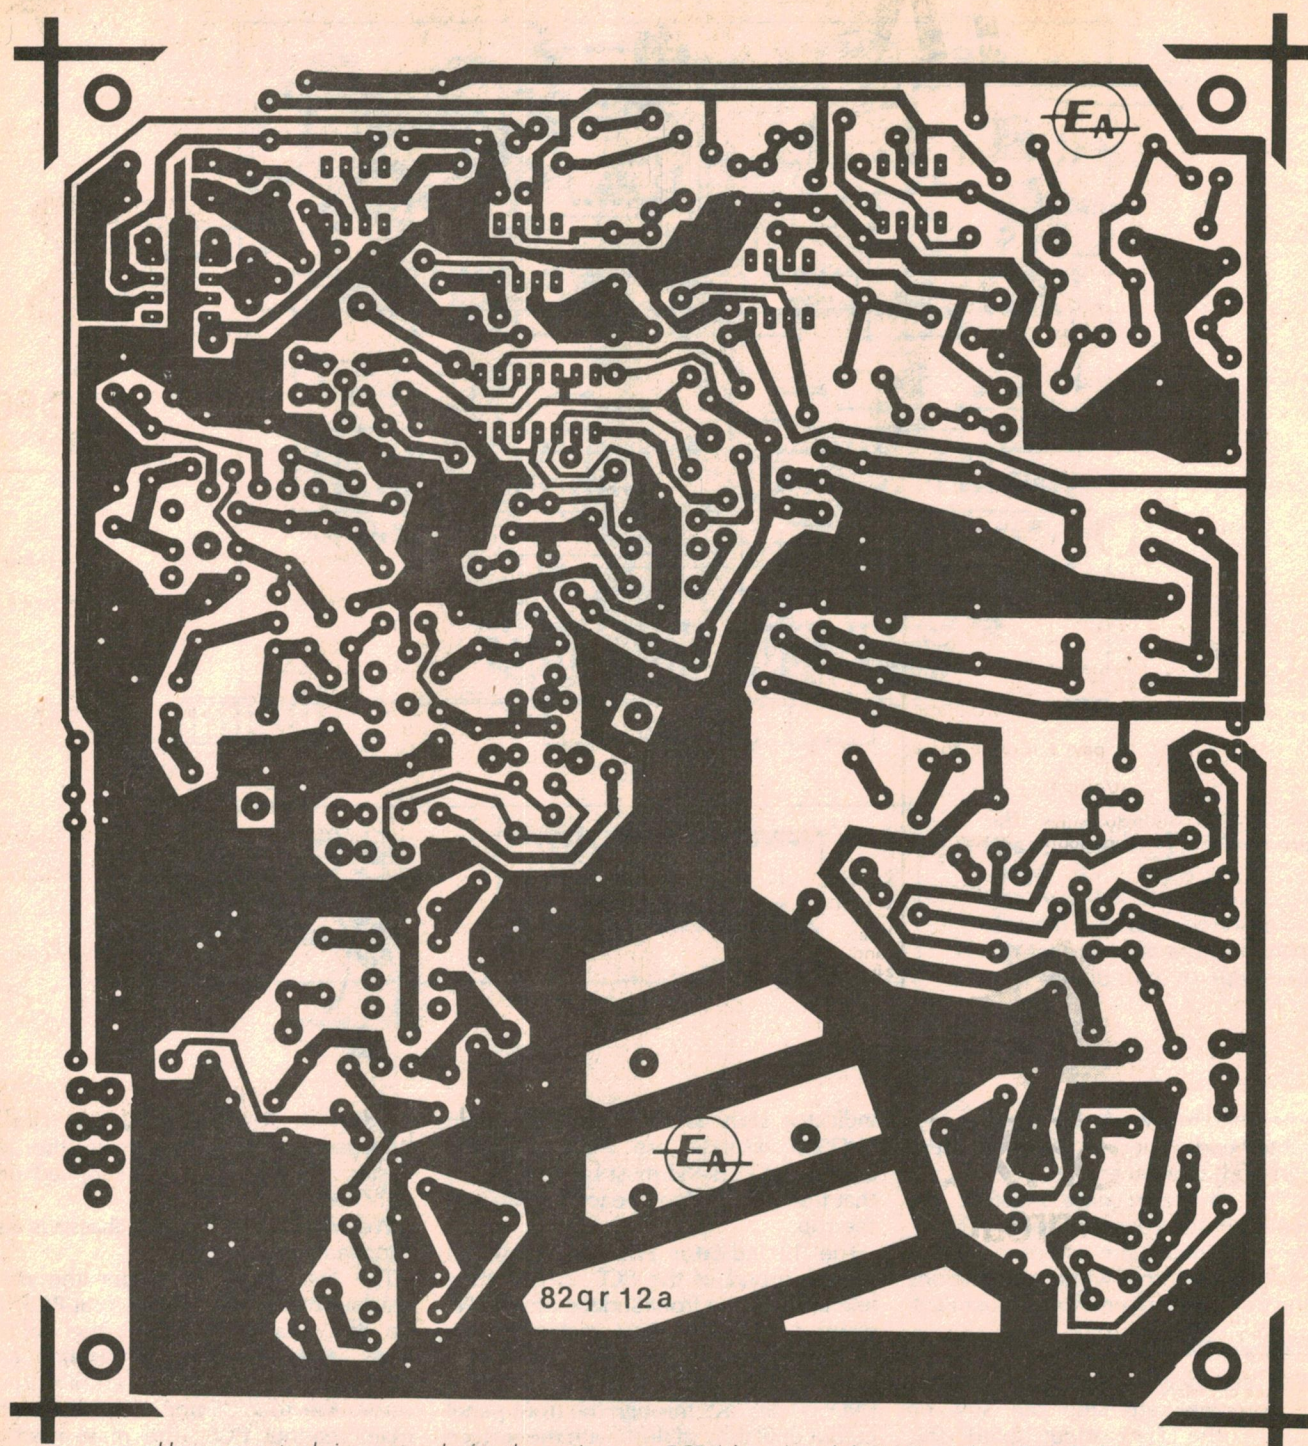

Here are actual size artworks for the main tuner PCB (above) and the LED readout PCB (below). A full-size artwork of the main readout PCB was published on page 58 of the October 1982 issue.

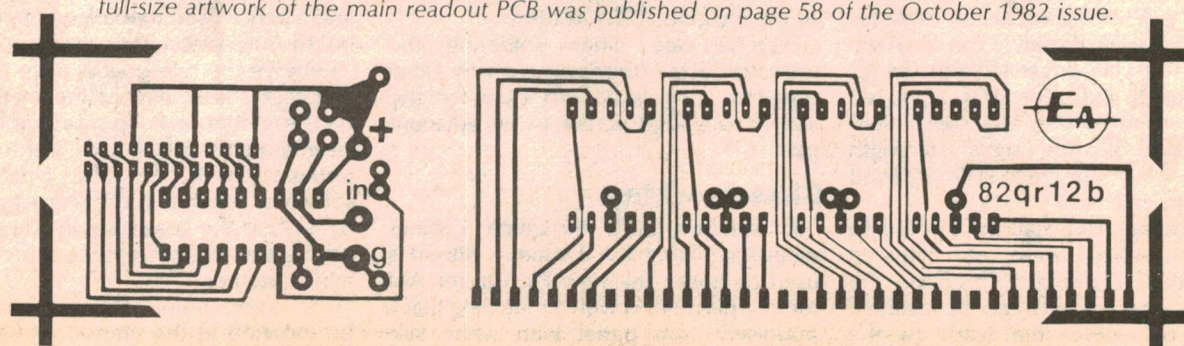

NEW! NEW! JAYCAR★

COOLING FANS★

Quality Ball Race construction, now you pay no more for quieter, much longer lasting and more efficient ball-bearing fans from Jaycar!

TWO POPULAR SIZES:
12 WATTS - 80x80x42(d)

\$24.95

13.5 WATTS - 119x119x25(d)

\$27.50



new

AT LAST!! INTERNATIONAL STANDARD (IEC 320) 240V APPLIANCE CONNECTOR★


You asked for it and here it is. Fully approved 240V mains inlet to International Standard IEC 320.

- Front or rear panel mount
- 240V AC 6A rating
- Accepts IEC 320 International power cords
- Simplifies 240V wiring.
- Quick-connect/solder on terminals.

We also have the IEC 320 line plug assembly for ONLY \$4.95.


6.4 mm dia.

Beware of non-approved units!



NEW! INSULATION DISPLACEMENT CONNECTORS & RIBBON CABLE!!

I.D. Insulation displacement. The quick and reliable way of making multiple connections to computer peripheral connectors. Great for Disc Drives, Printers etc. Crimp them yourself and save a fortune!!

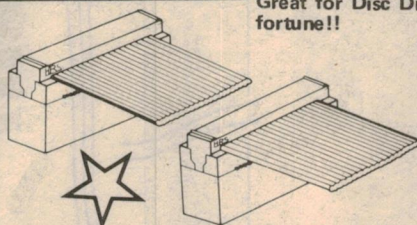

CONNECTORS:

16 pin DIP HEADER	\$1.99
24 pin DIP HEADER	\$2.50
P.C. Edge Connector 34 way (Suits 5 1/4" Disc Drives)	\$8.50
25 Pin Cannon 'D' Male	\$8.95
25 Pin Cannon 'D' Female	\$8.95

CABLE:

16 way	\$1.50/metre
25 way (suit DB25's & 24 way DIP)	\$2.50/metre
34 way for Disc Drives	\$3.45/metre

low cost balanced mic transformer★

Sensational price for a completely MU-metal shielded unit!!

Until now you had to pay a fortune for a shielded balanced tranny!

- 2-600 ohm (CT) input/output
- 50k output/input
- Can be used either way round
- Standard 9mm bushing mount
- Colour coded leads.

Don't pay over \$30!!!

17⁵⁰



MAGAZINE BINDER★

Keep your precious (and expensive) magazines in order for easy reference. Smart blue colour with gold lettering. Heavy gauge and richly chromed metal fittings.

LOW IMPORT PRICE ONLY \$4.95
4 up \$4.50 each



LOW CAPACITANCE SCREENED CABLE

You asked for it! This is the same high-quality screened cable that we use in the 5000 Blueprint preamp. We have had dozens of requests from people who wish to upgrade their preamp etc. As we have said before it's not cheap. But it is good.

1-99m 99c/metre

100m+ 80c/metre


Capacitance is about half cheap screened cable.



EXPERIMENTER BREADBOARDS★

Ample stocks of these boards plus the range has been extended.

WBDN 100 holes	\$2.95
WBTN 640 holes	\$9.45
WB2N 840 holes	\$13.95
WB4N 1680 holes	\$26.50
WB6N 2420 holes	\$39.95

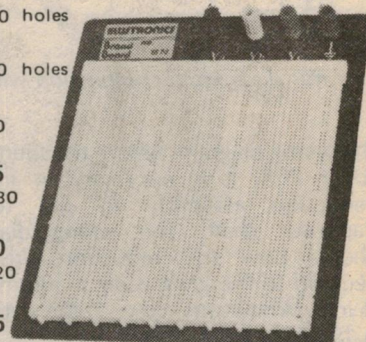

Cannon XL connectors~great new range★★★

5 pin and right angle types now in stock.

DESCRIPTION	PRICE
3 pin male line	\$3.50
3 pin female line	\$3.95
3 pin male chassis	\$3.25
3 pin female chassis	\$3.95
5 pin male line	\$6.95
5 pin female line	\$7.95
5 pin male chassis	\$3.95
5 pin female chassis	\$6.95
240V Mains line	\$6.50
240V mains chassis	\$5.25
3 pin male right angle line (Neutrik)	\$4.95
3 pin female right angle line	\$5.95
3 pin female line (Neutrik)	\$4.95
3 pin male line (Neutrik)	\$3.95

superbright LED

The average 15 cent LED has a light output of 0.8mCd (milli Candelas) at 20mA. Can you imagine a 200mCd LED? (at 20mA)? Well if you can't - buy one and find out. They are ideal for panel illumination or very low current work. (They will still give useful light at 1mA!).

Red with clear lens - 69c each
10 up only
62c each. . . .



SUPER SPECIAL

URGENT. WE HAVE SECURED A QUANTITY OF 240V. DISCO STROBES, NOT KITS. BUILT-IN WOODGRAIN CABINET. 0-12 FLASHES PER SECOND VARIABLE. BRAND NEW BUT REWORKED Q.C. CONTROLLED STOCK. ALMOST 1/3 OF NORMAL PRICE. . . NOW ONLY \$12.50 WERE \$36.50.

Now you can draw pcb patterns, component overlays, block diagrams etc., professionally with the "Linex" design template. Each template is precision die-cut & designed for use with a 0.5mm pen. The template has clearance pads to avoid smudging. Dozens of symbols are provided including: - * IC pads * Edge connectors (.1, .125, .15, .156 & .2") * TO-3 & TO-66 outlines * all TO-5 round IC's * Multiturn pots * TO-92, TO-220 etc * Most capacitors & resistors.

LINEX electronic lay-out

NEW

New! PCB Drafting aids from Denmark!!

2 sizes available


1:1 (same size art) \$18.95

2:1 (2x size art) \$29.95

Both complete with plastic protective wallet.

SEE OTHER JAYCAR ADS FOR ADDRESSES AND PHONE NUMBERS

Playmaster hifi AM tuner

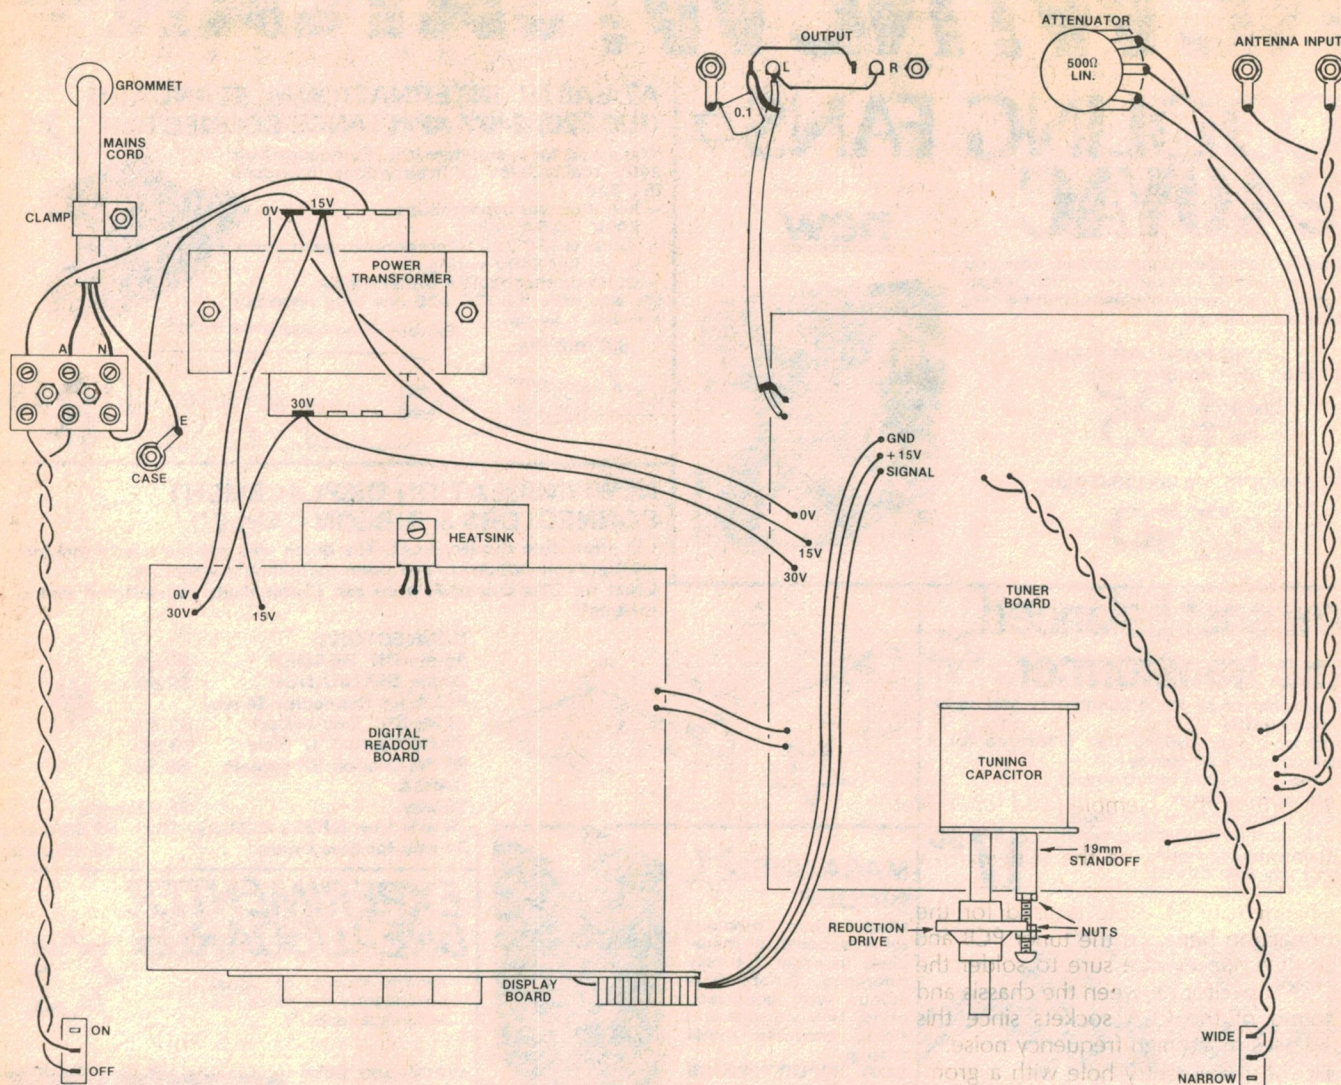

Use this diagram in conjunction with the circuit and parts overlay diagrams to complete the tuner wiring.

the wiring diagram. Before mounting the tuner PCB, it is necessary to fit the reduction assembly to the tuning capacitor shaft. The wiring diagram shows how the reduction drive is secured to the gang using a 30mm-long 1/8-inch Whitworth screw, three nuts and a 19mm brass standoff.

The tuner PCB is installed in the chassis using four 19mm brass standoffs. In most cases, it will be necessary to file down the standoffs slightly so that the reduction drive shaft is centred in the front panel hole. On no account should the reduction shaft short against the front panel, since this will upset the tuner operation.

A substantial heatsink is required for the 7805 3-terminal regulator on the main readout PCB. This is fashioned from a 70mm x 65mm sheet of light gauge aluminium, as shown in Fig. 1, and bolted to the chassis using machine


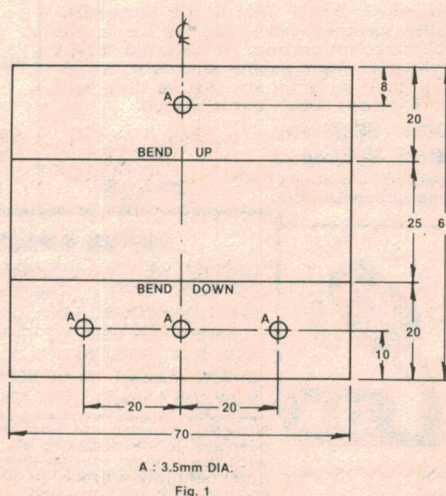


Fig. 1: use this diagram to fashion a suitable heatsink for the 7805 3-terminal regulator (main readout PCB).

screws and nuts. The readout PCB assembly can now be permanently installed in the chassis but note that you may have to drill new mounting holes at the front of the board so that they line up with the chassis holes. (We found it necessary to move the mounting holes back about 10mm to clear a small lip at the front of the chassis.)

A mica washer and an insulating bush must be used to electrically isolate the 7805 regulator from the chassis. Smear heatsink compound on the mica washer and regulator, then bolt the regulator to the heatsink as shown in Fig. 2. Finally, use a multimeter to check that the metal tab of the regulator is indeed isolated from the chassis.

Use medium duty, 10mm \times 0.2mm hookup wire for the low voltage power supply wiring and light duty, 10mm \times 0.12mm insulated wire for the connections to the antenna sockets and

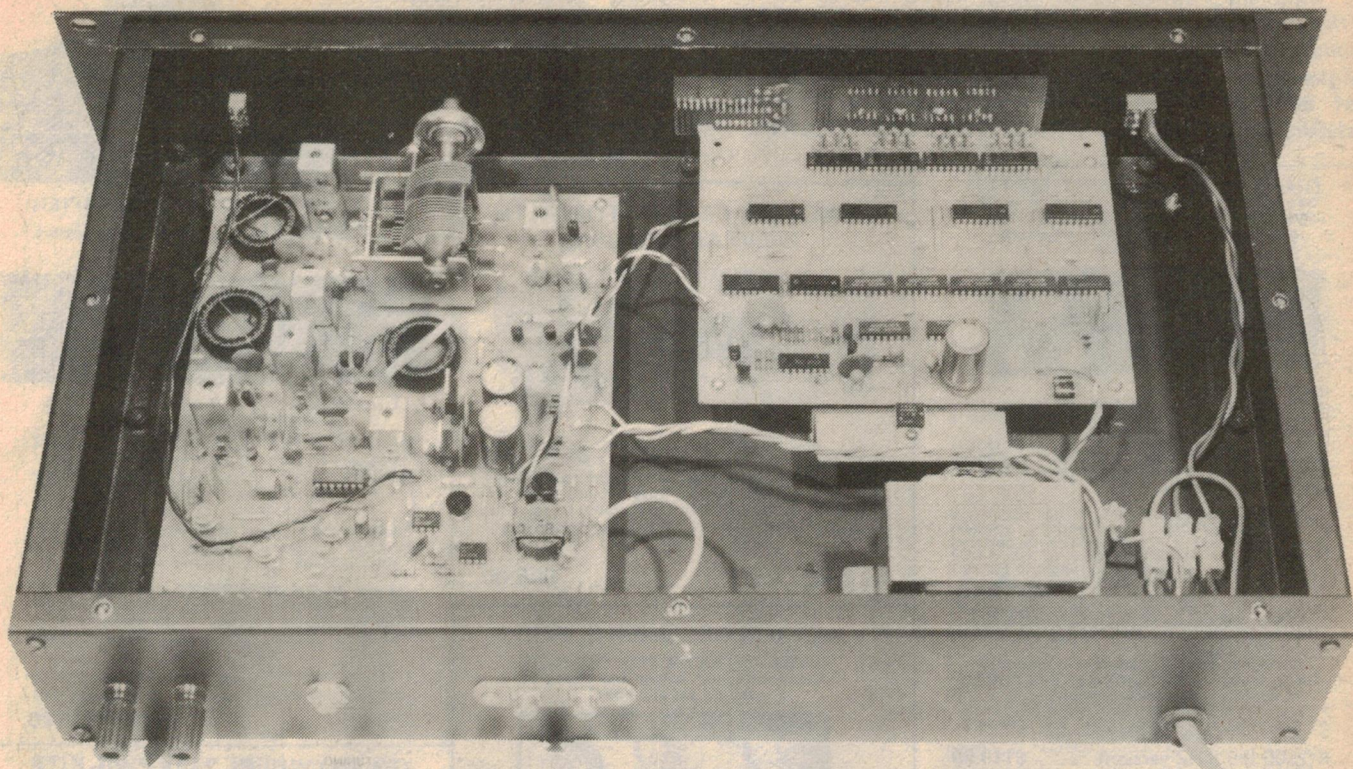

View inside the assembled AM tuner. Note the heatsinking arrangement for the 7805 3-terminal regulator.

attenuator as well as the wide/narrow switch.

Shielded audio cable is used for the connection between the tuner PCB and the RCA sockets. Be sure to solder the $0.1\mu\text{F}$ capacitor between the chassis and ground of the RCA sockets since this bypasses much high frequency noise.

Fit the mains entry hole with a grommet and pass the mains cord through it. Anchor the cord securely with a cord clamp and connect the earth lead (green/yellow) to a solder lug bolted to the chassis. Make sure that paint is removed from the area of the chassis around the earth connection to ensure a

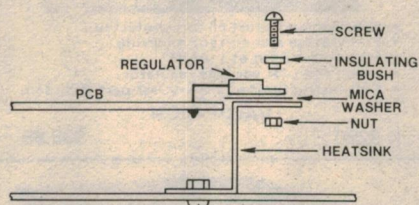


Fig. 2


Fig. 2: mounting method for the 7805 3-terminal regulator.

good contact. The active (brown) and neutral (blue) leads are connected to an insulated terminal block.

Complete the mains wiring to the power switch and transformer primary using 250VAC rated insulation hookup wire. Fit the three terminals of the mains switch with push-on sleeving to avoid the danger of accidental contact with the mains supply.

Next month we shall describe the alignment procedure and a simple CMOS RF oscillator to facilitate this task. Note that the only essential measuring instrument required is a multimeter.

NOTE: The following parts should be added to the parts list published last month: $3 \times 3\text{-}30\text{pF}$ trimmer capacitors (Philips 808); 1×4066 CMOS switch. 

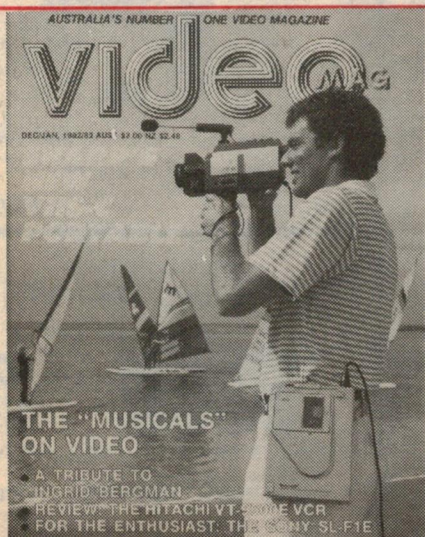

GOOD READING

Interesting — relaxing — informative
Brought to you by the same team that
produces "Electronics Australia"

IN THIS ISSUE

- Musicals — from Broadway . . . to video.
- Stereo TV sound is in sight.
- Ingrid Bergman — memories of a great actress.
- A look at Sharp's VHS-C and the Sony SLF1E VCRs.
- Hitachi VT-9500 VCR review.
- Review current video cassettes — and much more.

ON SALE AT YOUR NEWSAGENT NOW


I'M BUILDING *have built* THE FIRST TWO

— what am I raving about? Well, having one of the World's finest home stereo systems (the brilliant ETI 5000 series amp and preamp together with my beloved B & W DM II loudspeakers of course!), I couldn't resist building ETI's 5000 series 1/3 octave Graphic Equalizers. I have been pestering ETI for well over a year — and at last the many 1000's of 5000 series owners have the opportunity to complete their system with another classic, no compromise DAVID TILBROOK DESIGN. Details are on the other page of this ad.

Cheers... *Jack O'Donnell*



DIGITAL FREQUENCY METER




IMPORTANT NOTES:

(1) This project is well within the scope of the "not so experienced" as virtually all components are contained on a single PCB.
(2) ALTRONICS USE ONLY THE SPECIFIED INTERSIL LSI — BEWARE OF INFERIOR KITS THAT DO NOT CONFORM TO THE ORIGINAL DESIGN.

- * Screened front panel
- * Bright high efficiency 7 segment display
- * Frequency ranges 0.10MHz, 0.50MHz, 10.50MHz (with optional pre-scaler)
- * 4 gating times — 0.1, 1, 10, 100 seconds
- * 4 period measuring ranges 1, 10, 100 and 1000 input cycles give 0.1uS resolution
- * High input sensitivity — 10mV to 30MHz, 100mV at 50MHz @ 1M input impedance, 200mV at 500MHz @ 75 ohms input impedance
- * High accuracy — typically better than .005% count uncalibrated.

Costs a fraction of commercial counters.
EXCLUSIVE ALTRONICS KIT FEATURES:
* IC sockets provided throughout.
* Low aging 10,000 MHz XTAL.
* Thermalloy heatsink for 5V regulator.
* Quality Pactec Instrument Case
K 2500 (50 MHz version) \$119.50
K 2501 Pre-scaler \$26.00
(add for 500 MHz version)


* THE EVER POPULAR * MUSICOLOUR IV EA PROJECT



Combination Colour Organ and Light Chaser. Four channel colour organ. Internal microphone or connect to speakers for colour organ operation. (The lights connected to each channel pulse in beat to the music proportional to portion of frequency spectrum concerned.) Four chaser modes forward and reverse. Output lamp load capacity a massive 2400 watts — that's 100 party globes. Full instructions and every last nut and bolt included. Great for parties, shop signs, display windows etc.
K 1004 \$89.50

HIGH FIDELITY AM Sounds every bit as good as FM With this absolutely brilliant EA Project

Project 82 AR12 — See December EA



Frankly, we felt AM was dead and buried for the serious audio buff — when EA told us their new wide band AM tuner had 16KHz bandwidth and made AM sound like as never before — we were still not convinced. But on hearing the New EA AM Tuner, I for one was astonished — AM Broadcasts now sound incredible, there is no other word for it. And the 9KHz whistle filter really works! The result is clear smooth sound reproduction that will be a joy to every constructor on this fantastic tuner project. The Altronics Kit includes rack box and every last nut and bolt — even solder. Full instructions included.

K5200 \$249.00

FUNCTION GENERATOR WITH DIGITAL DISPLAY




EA's new Function Generator covers the frequency range from 15Hz to 170kHz in three ranges with coarse and fine frequency controls. An economical 4-digit display has been incorporated to eliminate dial calibration. Sine wave distortion can be trimmed to around 0.5%.
See April, 1982

K 2505 \$85.00

ALTRONICS POWER SUPPLY


BASED ON EA LM 317K PROJECT
Every workshop, school and hobbyist
should get one now!



- * Overload and short circuit protected.
- * Full voltage and current metering.
- * 3-32 volt output at 1 AMP.
- * Uses LM 317K variable regulator.
- * Full instructions and every last part included.

VALUE PLUS!

K 3200 \$39.95

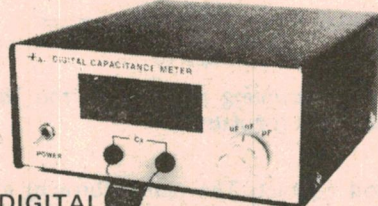

DIGITAL CAPACITANCE METER

Electronics Australia Project. Measures 1PF — 99.99 uF 240V Mains Powered. Bright LED Display. Easy to build. Complete kit of parts and full instructions.

*** EXCLUSIVE TO ALTRONICS ***
Each kit now includes precision measured capacitors for accurate calibration of each range.

K 2520 \$45.00

NEW ETI 162 POWER SUPPLY 0-30V at 1 amp

With Voltage and Current Limiting



- * Overload and Short Circuit Protected.
- * Full Voltage and Current Metering.
- * Fully variable voltage and adjustable current limiting.

Exclusive — Fully S.E.C. Certified Mains Transformer supplied.


If you're considering buying this kit from your local supplier or one of our competitors — first ring and ask them if the mains transformer is S.E.C. certified to ASC126 — chances are that it won't be.

So why not give us your order? An Altronics Quality Kit speaks for itself and with our overnight JetService we guarantee to deliver to your door faster than your local supplier.

K3205 \$49.50

GREAT NEW MOSFET PA AMPLIFIER KIT FROM ETI 150 watts power output.

See June '82



UNCONDITIONALLY STABLE - SOUND STUDIO SPECIFICATIONS

OUTPUT IMPEDANCE Selectable to low Z voice coil or 100V or 70V line out.
INPUTS 2 mic inputs HI or low Z with speech filter.
1 Aux. input.

- * Low noise 5534-op amps used.
- * Noble W/wound power resistors used in output stage for guaranteed stability.

*** ALTRONICS EXCLUSIVE ***
All due respects to ETI, but we felt the original case was lousie — So we've brought out ours utilising our snazzy H 0400 Black Rack Cabinet.

It looks terrific!! And for this month only, it's the same price as the original version.

K 5035 ONLY \$239.00

GO ANYWHERE 240V PWR. KITS

See EA May and June 82. These great new inverter kits enable you to power 240V appliances for your car, caravan or boat. (From Standard 12V car battery.)

40 WATT

Suits small appliances, i.e. turntable, tape deck, shaver etc. Variable frequency adjustment enables accurate speed control of turntable motors.




IC
Sockets
Provided

K6700 \$55.00

300 WATT

Fully regulated and overload protected
XTAL locked frequency.

Use to power hi-fi, TV sets and for emergency lighting.



- * Gold plating on both PCB edge and edge connector.
- * Low age rate parallel resonant XTAL used.
- * Sockets for all IC's.

K6750 \$199.50

ELECTRONIC FLUORO STARTER

See EA October 1982




Save a
fortune on
Fluoro
Tubes

- * Extends the life of your fluoro tubes by 1,000's of hours.
- * Instant "ON" — no more flickering at switch on.

K3210 \$4.95

At last a graphic worthy of the 5000 NAMETAG SERIES 5000 1/3 OCTAVE GRAPHIC EQUALIZER

Another brilliant DAVID TILBROOK no compromise design



Free
JetService
over-night
delivery on
this Kit —
Nov. & Dec.

SPECIFICATIONS:

Noise — at zero gain and 20 KHZ Bandwidth — 102 db. Distortion 1 KHZ — typically .007%. Bandwidth — 12HZ — 105 KHZ + 0 — 1 db. Boost/Cut + and — 14 db.

ALTRONICS EXCLUSIVES:

* All 1C sockets provided * Quality series Racking Case supplied * Genuine Philips Sygnetics Low Noise 5534 1C op amps supplied * Specially imported high accuracy linear slide potentiometers employed for precision control adjustment. (NOTE: Not compromise "Null Centre" types that some suppliers offer.)

K 5025 See ETI Magazine November 1982 \$199.50

STUDIO FORMAT ETI 5000 STEREO CONTROL PREAMPLIFIER

There have been countless accolades exclaiming this brilliant design by Australia's top audio design engineer David Tilbrook — and with good reason!



As a demonstration of our faith in this classic designed preamplifier we proudly release the **STUDIO FORMAT 5000 PREAMP** which includes some very worthwhile refinements as detailed here:—

* Gold plated RCA Jacks on all phono inputs * 1 x pair gold plated RCA Line Plugs, supplied * Military spec. National Semiconductor LM 394's employed * Low capacitance screened cable, supplied; 1C sockets provided throughout; Multicoloured led display * Metal film 1% resistors used throughout all audio circuitry * Pretinned PCB's * Satin Black brush finished, aluminium control knobs

DELUXE STUDIO FORMAT 5000 PREAMP KIT

Complete kit includes all ETI specified parts plus the Studio Format Package. Full instruction booklet included. SEE ETI MAG. JULY '81—OCT. '81 FOR FULL DETAILS.

K 5001 \$275.00

ETI 5000 STEREO MOSFET AMPLIFIER

See ETI magazine Jan. '81—April '81. New generation mosfet power semis facilitate David Tilbrook's classic power amplifier. Listening tests prove it surpasses even the best in conventional amplifiers in low fatigue, high definition audio. Completely uncoloured crisp sound purity.



EVEN BETTER: This beautifully engineered amp design is based principally on two identical printed circuit boards with a minimum of other wiring, thus enabling even a relative "beginner" to accomplish by step instructions are followed.

building this project as long as the step by step instructions are followed.


The **ALTRONICS Kit** includes the **DELUXE FINISH FRONT PANEL HEATSINK**

* Original specified chassis bar design case * All metal work finished satin black * Flux shorting strap transformers used to minimise hum * Low leakage power supply electrolytics

SPECIFICATIONS: Power Output: 100 watts into 8 ohms x 2. Frequency Response: 8 HZ - 20 KHZ + 0 db — .4 db. Noise: 116 db below full output. Input sensitivity: 1V RMS for 100 W output. Distortion: Less than .001% at 1 KHZ and full output. Stability: Unconditional stable.

COMPLETE MOSFET AMP KIT K 5005 \$289.00

LOUDSPEAKER PROTECTION KIT



Protect your valuable loudspeaker system with this easy to build, professional appearance kit. This easy to construct kit, based on the latest ETI design (Oct. '82), provides both DC and overpower protection for your valuable Hi-Fi speakers. Self-powered unit disconnects the speakers within 1/10th of a second of a fault occurring yet in no way effects the sound quality.

The **ALTRONICS Kit** comes in a superb 1 unit rack box including quality silk screened front panel.

EXCLUSIVES: * LED Monitoring of channel cutout * Fujitsu 10 amp relays * **ALTRONICS Kit** stereo unit complete to last nut bolt and washer * Input/Output speaker cable terminals supplied.


Install it in minutes — no AC or DC connections required — simply connects into the left and right channel speaker lines.

K 5050 Stereo Rack Version \$79.50

SINGLE CHANNEL SPEAKER PROTECTOR KIT

For the economy conscious the same electronics employed with the K 5050 are available in single channel format. Jiffy box, printed front panel and all terminals supplied.

K 5051 \$22.50



ETI'S BRILLIANT NEW DIRECT-CONNECT COMPUTER MODEM



Employs unique 'Commutated Filter' design overcoming virtually all the problems involved with conventional modems.


Super flexible unit facilitates communications between computers over cables, the telephone network and radio links.

Unit connects to a standard RS 232 interface and is capable of both 1200/75 Baud and 300/300 Baud transmission and reception * Line switching; answer and dialing facilities on board.

EXCLUSIVES: * Plated through, double sided PCB * Complete set of IC sockets * Kit requires 85 IN914 Diodes for programming these are included * Ceralock resonator and matching balanced load capacitor used for long life and high accuracy * Telecom approved isolating transformer and Reed relays included.

K 9644 (See ETI Oct 82) \$169.50

MODEM MONITOR AND CASE OPTION I



Having built the modems for our own computer use **ALTRONICS** strongly recommend (as do ETI) the inclusion of Audio and Visual Monitoring (signal strength). Our K 9645 includes all the components listed on Page 23 October ETI, custom **ALTRONICS** PCB, speaker, panel meter, front panel and case to house these options plus the full modem.

K 9645 Modem Option I. ONLY \$30.00

NEW UNIVERSAL DC-DC INVERTER


SEE ETI MAG. SEPT. 1982

Rated at 200 watts this versatile inverter can be simply configured for virtually any desired input/output voltage required by the winding format of T2.

Typical input voltages: 12/24/32 V. Typical output voltages available: + 50, + 15, + 40, 1400 V.

Now you can use high power hi-fi and PA amps for your boat, caravan etc.

K 6509 includes metal case \$39.50



40W FLUORESCENT LIGHT INVERTER FOR 12V BATTERY OPERATION

Self-oscillating, push-pull inverter operates above the audible frequency range and is capable of driving two 20 watt or one 40 watt fluorescent tube to 150% of normal (240 volt operation) efficiency.

Great for camping, working on the car, and of course, during power blackouts!

Complete boxed kit, including all winding wire.

K 6505 Includes Metal Case \$37.50

\$2 DELIVERY AUSTRALIA WIDE We process your order the day received and despatch via Australia Post. Allow approx. 7 days from day you post order to when you receive goods. Weight limited 10kgs.

\$4 DELIVERY AUSTRALIA WIDE We process your order day received and despatch via JetService for delivery next day.

BANKCARD HOLDERS CALL PHONE ORDER UP TO 8PM (EST) FOR NEXT DAY DELIVERY — SOUNDS INCREDIBLE DOESN'T IT? About you cynics just try us! Weight limit 10kgs. JetService cannot deliver to P.O. box numbers in Australia (you would have a fit).

\$10 DELIVERY SERVICE — AUSTRALIA-WIDE Goods over 10kgs must travel on the heavy service — road express. Delivery time 7 days average.


ALTRONICS

105 STIRLING ST., PERTH
FOR INSTANT SERVICE

(09) 328 1599

All Mail Orders: Box 8280 Stirling St, Perth, W.A. 6000

BANKCARD JETSERVICE DELIVERY NEXT DAY BANKCARD JETSERVICE



The Serviceman

A tale of two Sanyos: same symptoms, different fault

When two sets of the same make and model exhibit the same symptoms it is odds on that they are both suffering from the same fault. Odds on, yes; but a sure thing, no. Every once in a while Murphy plays a dirty trick, as he did on me on this occasion and, incidentally, handed me one of the potentially most embarrassing jobs I have had for a long time.

It all started with a perfectly routine call — from a new customer, incidentally — which simply described a failed colour TV set. By asking the usual routine questions I learned that it was a 63cm Sanyo set, about three years old, which had neither picture nor sound. It had shut down while the family was watching it, and started making a little clicking sound inside the cabinet.

When I eventually came face-to-face with the monster — and I use that word with some feeling — it turned out to be the Sanyo model CTP8604; one that I had not had a great deal to do with at this time, though I was familiar with the earlier model, the CTP7601, and described a strange fault in one in my September 1982 notes.

The clicking sound the customer had mentioned was, as I had assumed and which the reader has probably also identified, the power supply in a hiccup condition. Somewhere, something had failed and was loading the power supply excessively. All I had to do was find out what.

THE LINE OUTPUT STAGE?

Along with the power supply itself, the most vulnerable part of most colour TV sets is the line output stage. With the relatively high voltages involved this is the place where most breakdowns occur. Even so, finding the exact culprit is not always easy. It is seldom that the fault can be measured directly with a multimeter; the usual approach is to disconnect suspect components or sections until the power supply holds in, then narrow it down from there.

In this case my first step was to measure the main HT rail, which should have been 120V, and try to get some idea of the severity of the fault from the

voltage actually being produced. In fact it turned out to be swinging up to about 60V each time the supply cut in, suggesting that the fault, while severe enough to upset the power supply, was something less than a dead short.

I had made this measurement at the junction of C485, a 100 μ F filter capacitor, and R483, a 10 ohm safety resistor (though it is not shown as such on the circuit). Significantly, this hadn't tripped, but it was an easy place to break the circuit to the line output system, by lifting one side of R483. I was thinking in terms of a faulty line output transistor, or a faulty tripler, either of which can produce this kind of loading.

And it seemed I was on the right track. When I switched the set on again the power supply held up, the HT line came in at a little over 120V, and we had sound. The next easiest thing to do was to unplug the tripler, re-connect R483, and try again. But this didn't work; the power supply cut out again even without the tripler.

This suggested that the line output transistor, Q481, was the next most likely culprit, but this wasn't quite so easy to check in situ, due to the low DC

resistance in the associated circuitry. Unsoldering the base and emitter leads solved this problem and allowed me to test it. Unfortunately, it tested OK, thus squashing my line of reasoning somewhat.

So where did I go from here? In fact, there isn't a great deal more to go wrong in this part of the set, and I was somewhat reluctantly beginning to suspect the line output transformer (T902). Whereas some sets generate a number of voltages from tapings and windings on the line output transformer, and failure in any one of these circuits can shut the power supply down, this circuit appears to have only one such circuit.


This involves diode D482 from pin 9 of the transformer, and which generates an 18V supply for the signal unit. I checked the diode and associated filter components, but could find nothing wrong. So was it the line output transformer? The trouble was I didn't have a spare, either with me or in the shop. Otherwise I would have tried a new one quick smart, for they are an easy unit to fit.

NEW TRANSFORMER

At this point I decided to bail out for the moment. The easiest thing to do was order a new transformer and fit it. If it worked — fine. If it didn't it would be time enough to start worrying about more subtle faults, while a spare transformer in stock wouldn't go amiss. So I advised the customer that I would have to order a spare part and that it might be a couple of days before I could get back to finish the job. He seemed to accept this philosophically.

And this is where one strange aspect of this story began. Back at the workshop, and before I had had time to send off the order for a replacement transformer, what should turn up, from one of my regular customers, but the same make and model of set with exactly the same symptoms; no sound, no picture, and a hiccupping power supply.

I didn't regard this as too much of a coincidence until I started making some measurements, only to encounter exact-

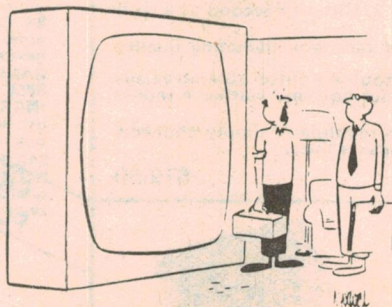

"Tell me where you got it from and I'll fix it for nothing!"

ly the same results; about 60V on the 120V rail, no change when the tripler was unplugged, a normal 120V rail when the R483 safety resistor was lifted, no fault in the line output transistor, and no fault around the D482 circuit.

I amended the order to read two line output transformers.

They didn't arrive for a couple of days and, by that time, the owner of set No.1 had phoned to say that the family would be out of town for a week or so, and they would let me know when they returned. Well, at least that would give me some breathing space in the event that the fault in set No.2 turned out to be something other than the transformer.

As I have already mentioned, fitting a new transformer is a simple job in these sets, for which the makers are to be commended. There is only one mounting bolt and the leads are wire wrapped on the terminals. A few minutes work with a pair of cutters and a soldering iron and the set was ready to go. I left the tripler unplugged, crossed by fingers, and switched on.

I heaved a sigh of relief as everything came up as I had hoped; normal 120V rail, sound, and EHT as far as the tripler terminals. I switched off, plugged in the tripler, and tried again. Whereupon the power supply promptly shut down again and it didn't take a genius to work out that the tripler was shot.

So now I had to order a replacement tripler and I didn't have to speculate for very long on the wisdom of ordering two. I could just imagine my embarrassment if I turned up to repair set No. 1 with a replacement transformer, only to find that I needed a new tripler as well. That would only cause further delays, which would be bad enough with a customer I knew, but unthinkable with a new one I was trying to impress.

The new triplers turned up in due course and I lost no time in fitting one to set No.2 in the workshop. And this time everything worked; all that was needed was a routine touch-up of picture geometry, convergence etc, and the set went back to the customer. All that remained now was to tackle set No.1, but I felt reasonably confident that I had covered all eventualities.

The chance to confirm this confidence came a few days later when the customer phoned to advise that he was back home and, naturally, would like the set fixed as soon as possible. So, armed with tripler and transformer, I duly knocked on his front door. Before commencing the job I warned him that, based on a recent experience, the job might turn out to be more expensive than I had originally indicated. He simply shrugged his shoulders and said, "go ahead".

As before, fitting the new transformer took only a few minutes and, once again

I unplugged the tripler, crossed my fingers, and switched on. And, once again, everything worked; normal 120V rail, sound, and EHT up to the tripler. Then I plugged the tripler in and tried again. And — surprise, surprise — everything held and I sensed that we had normal EHT. So the tripler was OK after all. Oh well, I could always use a spare.

All that remained now was to give the picture a routine touch-up and I could be on my way. Except that when I moved around to the front of the set there wasn't any picture. What a let-down! Still, I had to put on a brave face and carry on as though this was quite normal at this stage of the job. But what was I looking for now?

I felt reasonably sure I had normal EHT but, to make sure, I fished out the EHT probe and checked it. Sure enough there was a good 23kV at the ultor, which should have been plenty. What about the G2 voltage? Yes, that checked out OK as well. That suggested the R,G,B, outputs as the next most likely cause of picture tube cut-off.

Sure enough, there was clearly something wrong here. According to the circuit, voltages at the collectors of these three transistors, Q281, Q282, and Q283, ranged between 120 and 140V, whereas they were sitting on 180V plus. Well, at least I was making some progress, but what was upsetting the three stages?

A COMMON SOURCE

The fact that all three stages were affected suggested that it was coming from a common source, and the most likely common source was the video chain supplying the luminance to all three stages. This signal starts at the first video amplifier, Q200, and goes via the second video amplifier, Q172, and the third video amplifier, Q173, and thence to the emitters of the R,G,B, output stages. The chrominance signals are fed to the bases of these three stages from the R-Y, G-Y, and B-Y amplifiers in the demodulator chip.

The video chain, as is fairly common these days, was direct-coupled from the first stage right through to the emitters of output stages, meaning that even a small voltage error at the beginning of the chain could have marked effect at the end of it. I made voltage measurements along the chain and up to the base/emitter circuits of the output stages.

This wasn't very conclusive. Some voltages were spot on, others were a little off, but seemed as though they should be close enough. But how close is close enough in a direct-coupled circuit that you've never seen before?

Then I had another idea. Could I brute force the video chain into working and thus, possibly, gain a clue as to what was working and what wasn't? One of my

COLOUR TV CHANGE OVER MODULES AND SPARES

HMV EMI C211/212

Power supply	\$38 change over
Horizontal	\$45 change over
Vertical	\$22 change over

HMV EMI C221

Power supply	\$32 change over
Horizontal	\$42 change over
Vertical	\$24 change over

PYE T29/T30

Scan & Signals	\$53 change over
Philips & Kries. Early	
Power supplies	\$53 change over
P/Supply controls	\$18 change over
Sound	\$15 change over

Other models available

RANK

All deflection boards	\$48 change over
-----------------------	------------------

SHARP

Horizontal	\$24 change over
------------	------------------

26" BLAUPUNKT

Early version	\$28 change over
P/supply & mains unit	\$28 change over
Remote receiver	\$48 change over
Remote H/Piece	\$35 change over
Complete chassis	\$80 change over

TYNE

Convergence	\$38 change over
EHT + P/Supply	\$48 change over

NATIONAL CP2000, TC86

Power supply	\$30 change over
Vertical	\$30 change over
Video	\$48 change over

SONY K1830

Board A	\$48 change over
Board D	\$36 change over
Board E	\$48 change over
Board F	\$48 change over

HANIMEX HCT26-700

Line scan	\$53 change over
Field scan	\$48 change over
Decoder	\$48 change over

GEC 2213 & 2621 & 2612

PC706 Complete	\$53 change over
PC737	\$53 change over
PC687	\$48 change over
PC470	\$38 change over
PC656	\$38 change over
PC475	\$53 change over

LUXOR

All P/Supplies	\$30 change over
----------------	------------------

NEW PARTS

EHT transformers to suit Blaupunkt-Luxor-Nordmende-GEC 22" — All \$32 each
Philips & Decca — \$36 each
HMVC211/212 — \$30 HMVC221 — \$24

LARGE RANGE OF OTHERS AVAILABLE.

New remote control handpieces to suit Luxor-Blaupunkt-Nordmende-GEC-ITT/Greatz-Saba-Loewe-etc., all with 2 year warranty \$68 each. When ordering parts please specify clearly model and make.

Large range of spares in stock new & second hand

SPECIAL triplers Philips type \$10 ea.

Send cheque or money order to:

T.T.V.S.,

159 Queens Parade,
Clifton Hill, Vic. 3068

Ph: (03) 489 1168

Minimum Order \$35. P/P \$3
Orders over \$100 Post Free.

contributors pulled this stunt when he was faced with a cut-off problem in a Rank Arena. (January 1981.)

I armed myself with a 1k Ω resistor on a flying lead connected to chassis and, for a start, connected this to the emitter of the third video amplifier. This was enough to bring up a faint image and, thus encouraged, I went straight to the first video amplifier and found that, by connecting the 1k Ω to the base I could produce a perfect picture.

Well, at least that seemed to rule out any faulty transistors in the video chain, but did seem to confirm that there was a faulty DC condition somewhere. By now I was becoming suspicious of another stage in the video chain; Q174, an automatic beam limiter (ABL) stage. Once again, voltages seemed to be close enough, but were they?

I decided to remove the transistor and see what happened. This was a simple job and it worked; the set immediately came back to normal and produced a first class picture. I checked the transistor and it measured OK but, just to be on the safe side, I replaced it with a new one. But this did no good, the set still would not work with the transistor in circuit.

In hindsight, the next few steps should have been easy, but they weren't. The problem was one that had been bugging me right through the job, and involved the circuit diagram I was using. This was not a manufacturer's issue, but a commercially reprinted one published as a service manual. Nor is the problem the publisher's fault. He has done the best he can in a very awkward situation.

In common with most modern circuits the original was quite large; too large to allow it to be reduced to a one page size and still be usable without a magnifying glass. So the only thing left is to break it up into sections, with plenty of overlap at the breaks. In general this works, except for one thing. Modern circuits are so complex that the draughtsmen invariably resort to the trick of terminating various leads in arrows and indentifying codes, to be matched with another arrow and code on the other side of the circuit.

This isn't too bad when you have all the circuit in one piece, although, to me, the arrows never seem to point in the right direction. But when the circuit is broken up, the arrows become completely meaningless. In this case a lead from the base of the beam limiter stage leads off the signal unit board to an arrow and is coded as 1AB, with the arrow indicating that it goes to 6AB.

Fair enough I suppose, but do you think I could find 6AB? I don't know how

much time I wasted looking for it. It seemed like hours (it wasn't, of course) but, with the customer in the same room, I was close to panic a couple of times. When I did find it it turned out to be on the neck board of the picture tube, rather than the deflection unit board where I had expected it to be.

As soon as I realised this I went straight to the neck board, pulled it off — and I knew the search was over. Staring me in the face was a slightly discoloured electrolytic with, as they say, its inside outside. More precisely it was a 4.7 μ F electro, C603. It forms part of a voltage divider network on the negative end of the EHT winding and which supplies, among other things, the G2 voltage.

But it also supplies a much lower voltage to the base of the beam limiter transistor and, without having to delve too deeply into the finer points of circuit operation, it was obvious that the circuit couldn't work without it. In fact, it proved to be open circuit and I imagine that, without it, pulses were being fed to the beam limiter, at line frequency, which cut the system off without the cause being very obvious at DC levels.

Naturally, a new capacitor fixed the set and, after a routine touch-up, I said goodbye to a happy customer.

The oddballs a serviceman meets

After that, I think something in lighter vein is called for. Fortunately, one of my consistent contributors, Mr J.L. of Tasmania, recently submitted a series of short anecdotes dealing with the strange behaviour of some customers. I can't cope with them all this time round, but here are some of the shorter ones.

A colleague once said, over a quiet glass of lunch, that servicing would be a wonderful job if it wasn't for the customers. He related some stories about his oddball clients and, after he had gone, I thought about some of the people I had met over the years.

The first is the "fresh air fiend". She had called me to look at improvements to her antenna system. I arrived at 9am on a cold foggy winter morning. (This is Tasmania, remember. Ed.) I could not see the antenna for the fog so I went to the door, expecting to be able to warm up while I inspected the interior layout.

But no. All the windows and doors were open and she was wearing light summer clothes! I shivered my way through the inspection and said I would come back when the fog cleared — like next summer.

Then there are the "dog lovers"; nice house, nice family, and quite charming

But there are still a few points to be considered. One concerns the problem I had with the sectionalised circuit. I was subsequently able to view the whole circuit in one piece and imagine how I felt when I discovered that the draughtsman had very thoughtfully labelled 1AB/6AB "To Picture Tube Socket Unit".

Why hadn't I seen it? For the simple reason that this was where the circuit had been cut, leaving the 6AB on one page and the instruction on another. Oh yes, it was on another page all right, together with an appropriate amount of overlap, but this portrayed the power supply circuit (apart from the extreme left hand edge) and I had no reason to give it a second glance.

OK, I'll know better next time.

The other point concerns the likely sequence of events in both sets. What happened first? Did the capacitor in set No.1 fail and take out the line transformer? Or did the transformer fail and produce a spike that wrecked the capacitor? My guess is that it was the latter sequence but, then, it might just have been coincidence.

And set No.2? A faulty tripler that took out the transformer? Or a transformer failure that wrecked the tripler? Again, my guess is for the latter sequence. But, if both guesses are correct, why the tripler in one case and the capacitor in the other?

Your guess is as good as mine.

customers — except that they have three large dogs which live inside all winter. Last time I called the atmosphere in the house was so overpowering that I felt I just had to open something. The trouble was that the window frames had been painted over years ago and the windows hadn't been opened since.

And one I dread hearing from is "the perfect host". As soon as I enter the house he opens a bottle and insists that I join him glass for glass until the job is done. I think he enjoys having a major breakdown in his TV set because it takes longer to fix and he gets more drinking time.

Then there was "Mr Plug". He had an ancient radiogram that stopped working. He decided that a valve had failed and that he could replace it himself. He saw a notice on the back of the cabinet which said, "Remove the power plug before making adjustments or changing valves." So he did; he took the power plug off the lead and couldn't get it back on again!

And it wasn't a valve.


Thank you J.L. I think all those are good for a chuckle, particularly the last one. There are others, but that's all we have room for this month. We'll hold the others over for the present.

BELOW COST SALE

MONSTER PACKS ARE BACK!!!

6.5mm STEREO JACK PACK


Pack of 5 stereo switching jacks, as used on amplifiers for headphone socket. Normally you would pay around \$1.00 for these. We are selling a pack of 5 for only \$2.50. That's around half price!!



5 JACKS for \$2.50

THUMBWHEELS FOR 1/3 NORMAL COST!!

High quality UK STOLEC 10 position single pole thumbwheel switches slashed for this month only. These precision switches are in grey. Dimensions 57mm (height) x 70mm deep x 15mm wide. Scoop price!!



5 FOR \$10.00!!

8 POLE DIL SWITCH


These top quality 8 pole DIL switches are fully coloured coded and numbered. Other are asking \$2.75. We have made a special purchase. Look at the savings!!



\$1.90 10up \$1.99

MAINS LINE FILTERS.

If you have trouble with mains interference on your computer, calculator etc, this is the answer. Reduces line to line and line to ground interference dramatically. Current up to 5A. Fully D.O.T approved.



PLF-2V-3RA-501(3A) \$10.50
PLF-2V-5RA-501(5A) \$11.50

SOLID STATE RELAY

Save on these superb Solid State relays from Gordos USA. Designed for commercial and industrial applications, they are able to switch inductive loads with ease. Optical isolation for safety.

Control voltage 3 to 32 volts DC
Max Line Voltage 280V AC
Max Load current 10A
Max 1 sec. surge 40A
Max 1 cycle surge 100A

Further details available. These superb SS relays sell for \$27.00 around town. But look at our price!!




\$21.00

HEATSINKS SELLOUT!

Heatsinks are expensive, but not at Sheridans. We have a quantity of superb Thermalloy T05 heatsinks and T0220 heatsinks at under half normal price. You get: 2 precision machined Thermalloy T05 heatsinks, 2 Thermalloy T0220 heatsinks, normal total value over \$6.00

\$2.75




AUDIO LEAD PACK

We've put together these super audio lead packs at a fraction of normal cost. Pack includes: PART DESCRIPTION

NO 5 pin DIN plug to 5 pin DIN plug
D 3.5mm plug to 2 alligator clips
F 5 pin DIN plug to 4x6.5mm plugs
I 6.5mm plug to 2 x 6.5mm sockets
K 5 pin DIN plug to 3.5mm plug
M 5 pin DIN plug to 4 x RCA plugs

Others are charging \$2.00 - \$3.00 each!!




**ALL 6
for \$5**

ELECTRO SALE 1/2 PRICE!!


This is probably your last chance to buy these brand new computer grade electros at around half normal cost. We made a scoop purchase of Philips, Sprague and Sangamo electros, but they won't last much longer. Order now to avoid disappointment!!

CAP MFD.	WKG. VOLTS	MAKE	DIA MM	HEIGHT MM	PRICE
500	250	SPRAGUE	35	80	\$5.00
590	200	SPRAGUE	35	80	\$5.00
1800	50	SNGAMO	35	60	\$3.50
2300	60	SPRAGUE	35	80	\$4.00
2400	50	SPRAGUE	35	55	\$4.00
2400	50	SNGAMO	35	60	\$4.00
3000	75	SNGAMO	35	125	\$5.00
3300	75	SNGAMO	35	110	\$5.50
3700	30	SNGAMO	35	60	\$3.50
4300	25	SNGAMO	35	60	\$3.75
7000	35	SNGAMO	35	90	\$5.00
8000	35	SNGAMO	35	110	\$6.00
8200	25	SNGAMO	35	90	\$5.75
8700	40	SPRAGUE	35	110	\$7.50
9100	60	SNGAMO	50	110	\$10.00
10000	40	SPRAGUE	50	90	\$6.50
13000	60	SPRAGUE	65	110	\$10.00
14000	25	SPRAGUE	50	85	\$5.50
14000	40	SPRAGUE	50	110	\$9.00
15000	3	SNGAMO	35	60	\$3.50
20000	25	SNGAMO	45	110	\$8.75
22000	6.3	PHILIPS	35	85	\$5.00
22000	10	PHILIPS	35	117	\$6.00

22000	75	SPRAGUE	75	145	\$19.00
26000	10	SNGAMO	35	110	\$6.50
30000	25	SNGAMO	65	85	\$13.00
30000	25	SPRAGUE	50	110	\$12.00
33000	16	SPRAGUE	50	120	\$12.00
36000	20	SNGAMO	50	110	\$7.75
39000	25	SNGAMO	50	150	\$10.00
39000	30	SPRAGUE	50	145	\$13.00
44000	35	SNGAMO	75	110	\$15.75
47000	10	PHILIPS	50	120	\$13.00
47000	25	PHILIPS	65	120	\$17.00
55000	3	SNGAMO	35	135	\$6.00
65000	35	SNGAMO	75	150	\$20.00
67000	10	SNGAMO	50	125	\$12.50
70000	50	SNGAMO	75	225	\$26.00
76000	25	SNGAMO	75	125	\$22.00
88000	10	SPRAGUE	50	145	\$14.50
100000	3	SNGAMO	65	85	\$7.00
100000	10	PHILIPS	65	115	\$13.00
110000	10	SNGAMO	65	120	\$15.00
110000	20	SNGAMO	75	150	\$20.50
120000	15	SPRAGUE	65	145	\$18.00
150000	6.3	PHILIPS	65	113	\$10.00
200000	3	SNGAMO	65	135	\$12.00



**Mounting clips
only \$1.00 each!!**

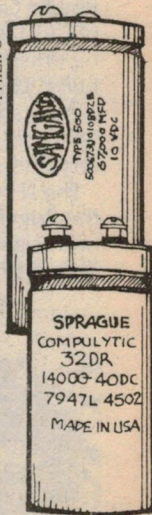

SHERIDAN ELECTRONICS

164-166 Redfern St., Redfern NSW 2016. Phone (02)699 6912, (02)699 5922
Mail Orders to Dept EA, PO Box 229 Redfern NSW 2016

Trading Hours:
Mon-Fri. 9am-5.30pm
Thursday 9am-7pm
Saturday 9am-12noon

Mail Charges:
\$5.00-\$9.99 \$3.50
\$10.00-\$24.99 \$4.00
\$25.00-\$49.99 \$6.00
\$50.00-\$99.99 \$7.00
\$100.00 or over \$8.00

Note: We regret we cannot give quantity discounts on credit card purchases.


Credit Cards: We accept both BankCard and American Express



MONSTER RESISTOR PACK - INCREDIBLE!!!

At least 400 per bag in 1/4, 1/2, 1 and 2 watt types. 10%, 5% 2% and 1% types. Carbon and wirewound types!! What a knockout!!

**A must at
only \$4.00!!**



MONSTER CAPACITOR PACK

Half a kilogram of brand new unused capacitors (electos, polyesters, ceramic and styro types. Well over 100 per bag. Crazy!!

**GRAB EM
only \$5.00!!**

Retail value over \$25.00!!!!



MONSTER POT PACK

Huge selection of pots including single, dual, switch, slider etc. 30 in all. Wow!!!!

**VALUE!!
only \$5.00**



MONSTER RELAY PACK


20 brand new unused relays. Huge selection. 12, 24 and 48 volt types. Worth at least \$50.00 But look at the monster saving!!!!

only \$5.00!!



TAG TANTALUM PACK. WOW!!!!

We all know just how expensive tantalum caps are. So look at our price!! 4 each of the following values (12 in all) 3.3uF 16V, 4.7uF 25V, 100uF 6.3V. Normally you would pay around \$5.50. Look at our price.



**12 tantalums \$1.95
Normal cost approx \$5.50!!**

Be the light of the party:

The dazzling new "LED Head" lightchaser

LED chasers have been used in some weird and wonderful devices over the years but few have been as outrageous as this project. In our uncompromising quest for state-of-the-art electronic gimmickry we have designed an electronic headband utilising the LED chaser. The circuit is quite compact and simple and could, of course, just as easily be used to adorn a sun visor or any other likely item.

by COLIN DAWSON

We are assuming, however, that most constructors will opt for the LED chaser headband, and in honour of these innovators, we have christened the project "LED Head". Why LED Head? Well, there aren't many names suitable for a project that sets light emitting diodes chasing around the pre-frontal lobe and anyway, it seemed like a Bright Idea!

This project is quite similar in concept to the Boggle Goggles, presented in December '82. In fact, it would make a perfect accessory for the well dressed Boggle Goggler! It should prove very simple to construct, and in most cases will be one of the cheapest projects you can build. The actual chaser circuit, including a box, should not cost much over \$10. The only additional expenses are a battery and suitable headband.

The LED Head has a big advantage over the Boggle Goggles in that the wearer is not significantly incapacitated whilst demonstrating them. You can go about

your business as normal. For this reason we anticipate that the LED Head may be used for rather long continuous periods. This, of course, makes a fairly heavy demand on the power supply which may not be met by the 216 9V battery. This battery will give a useful life of about one hour of continuous use, and is the only battery which will fit in the small plastic utility box. If its capacity is inadequate, the solution is to use an external battery pack. An alternative would be to use a bench power supply but this may present a problem if you wish to lead a conga at a party!

Giving the impression of movement to a string of lights, chasers produce an appealing effect. Besides the well known commercial applications, they are almost mandatory on the control panel of science fiction space ships. To the technically uninitiated, such displays are synonymous with computers, death rays and other devices of unfathomable com-




While he may look like a lunatic being restrained, this brave fellow is regarded as a leading light among his colleagues.

plexity. In fact, this circuit is quite simple, but only "Electronics Australia" readers need know this.

It is possible to impart the impression of movement to any number of lamps in a "string" by wiring them in groups of four. It is then only necessary to use a sequential four pole switch (or its electronic equivalent) to switch the lamps in sequence. At the first switch position, only the first lamp from each group is on and at the second position, only the second lamp should be on, and so on. By placing several groups of lamps end to end, movement appears continuous from one end of the array to the other.

The circuit employed in this project is almost identical to our Electronic Christmas Decoration of December 1981. The main difference is that the printed circuit board has been remodelled to fit into the smallest plastic utility box. Mounted on this printed circuit board are two ICs, four transistors and just a few other components. This part of the circuit can be considered as three parts: an oscillator (IC1); a divider (IC2), and a buffer/driver section (the four transistors).

IC1 is a 4011 quad two input CMOS NAND gate. This may sound rather daunting, but it simply means that the IC has

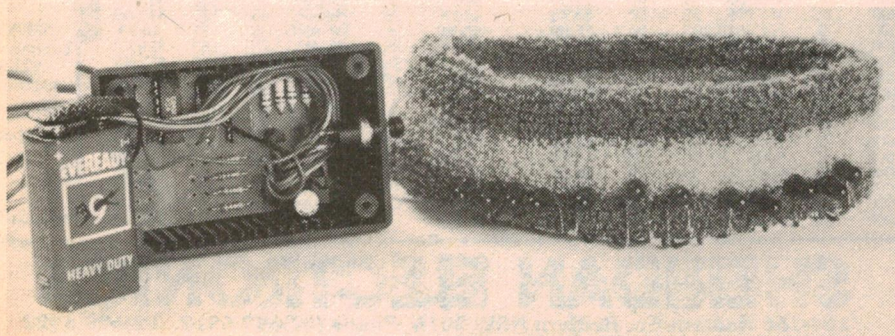

The LED chaser circuit and type 216 battery fit into the smallest size plastic utility box. The switch is wired between PCB and positive terminal of the battery.

four NAND (Not AND) gates, each gate having two inputs. In this circuit, only three of the gates are used, with the inputs to the fourth gate tied permanently low. By tying the inputs of a NAND gate together, the gate can be made to operate as an inverter ie, its input is in the opposite state to its output.

Referring to the circuit diagram, it can be seen that three such inverters, IC1a, 1b and 1c, are connected in series. A $1\mu\text{F}$ capacitor and a $27\text{k}\Omega$ resistor are connected between the outputs of IC1b (pin 4) and IC1c (pin 10). Since these two outputs will always have opposite polarity (because IC1c is an inverter) the capacitor will be charged in one direction, or the other. The $27\text{k}\Omega$ resistor provides a time of about 60 milliseconds for this charging. After this time has elapsed, the input of IC1a (pins 1 and 2) will be taken low (or high) and the gate output will change.

This will cause the other gates to change states and the $1\mu\text{F}$ capacitor now begins to charge in the opposite direction, again with the same charging time. The result of this continuing sequence is a square wave output at pin 10, which then provides clock pulses at a frequency of about 17Hz for the counter.


To give the desired sequential switching of the LED groups, a 4017 CMOS decade counter is used. This IC has 10 outputs, numbered 0-9, and normally each one goes high in turn for one clock cycle. Because we only require four different outputs, the fifth output is connected to the reset and the effective count is only four.

The 17Hz output of IC1c at pin 10 is connected to the clock input (pin 14) of IC2, the 4017 decade counter. On each positive transition of the square wave, the 4017 advances one count. The decoded "4" output (pin 5) is connected to the reset (pin 15). As soon as pin 5 goes high, the counter is reset with the decoded "0" (pin 3) going high. This last operation is independent of the clock input and, so far as this circuit is concerned, is instantaneous. Hence the 4017 is operating as a one-of-four counter.


Four NPN transistors are used to buffer the outputs of the 4017. A $10\text{k}\Omega$ resistor connects each output to the base of its respective transistor.

LED combinations


Assuming that there are to be 12 LEDs in the array, the LEDs driven by the decoded zero (pin 3) will be 1, 5 and 9. Similarly, the decoded 1 (pin 2) will drive LEDs 2, 6 and 10; decoded 2 (pin 4) LEDs 3, 7 and 11; and decoded 3 (pin 7) LEDs 4, 8 and 12. If an additional 12 LEDs are included, they must be wired in the same manner as the first 12. The two displays are then mounted end to end (in the mechanical sense).

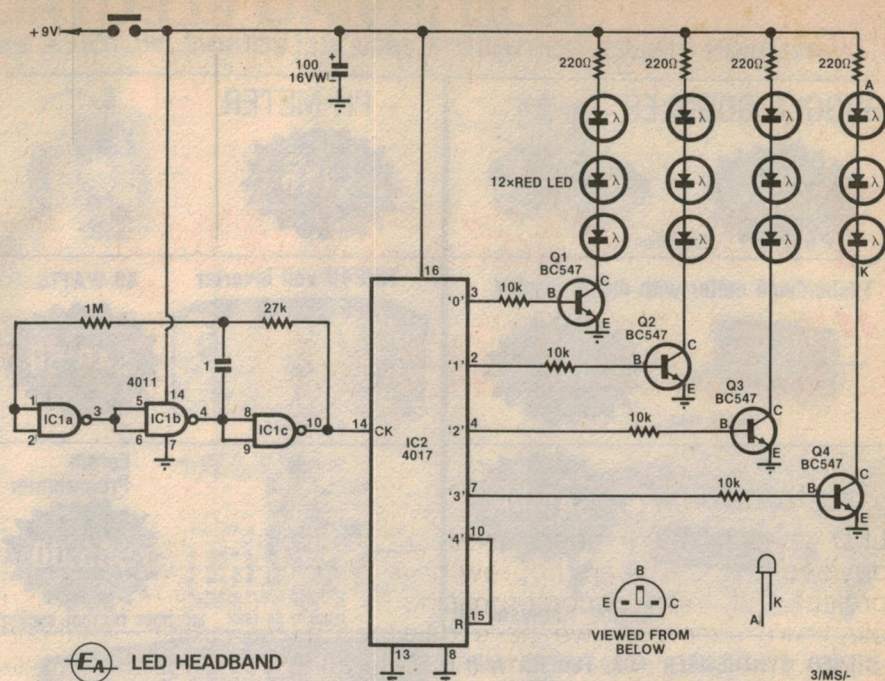

The chaser circuit consists of an oscillator, counter and LED driving transistors.

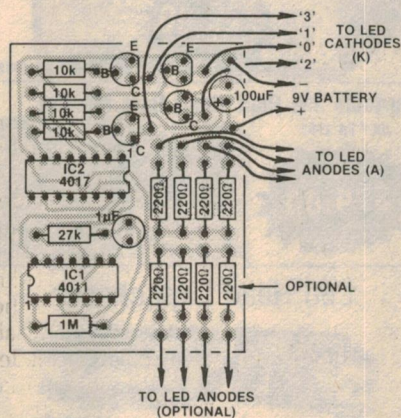

Above is the component overlay diagram. Parts marked "optional" can be added to produce a 24 LED chaser. The full size PCB pattern is at right.

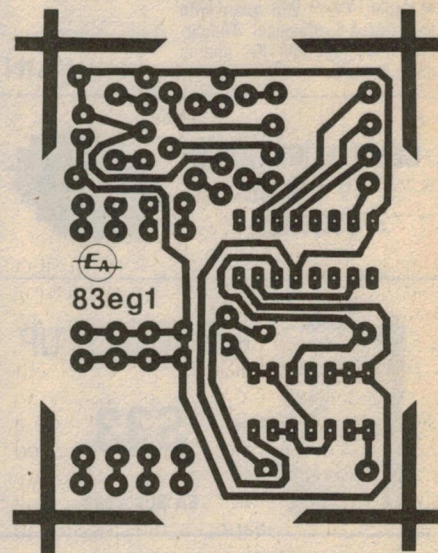

As we have presented it, the display has 12 LEDs arranged in four groups of three. One group is on at any given time, meaning that three LEDs at a time must be driven. In fact, the three LEDs are driven in series to minimise the current drain from the 216-type battery. The printed circuit board allows the option of adding another four groups of LEDs, the second group being driven in parallel with the first. Consequently, the current

drain of the circuit is doubled. This virtually eliminates the 216 battery as a practical power source with a pack of four 1.5V "AA" cells becoming the smallest practical power supply.

A separate current limiting resistor is used for each group of LEDs so that the value of the resistor can be tailored to suit the LEDs used. Different value resistors are required to compensate for the differing operating characteristics of various LED types. For example, red LEDs will exhibit a forward voltage drop of typically 2V, whereas green LEDs will be nearer to 2.6V. Assuming that the chaser has homogeneous LED groups, the red LEDs will require a higher value limiting resistor than the green. In fact, the values suggested are 220Ω and 68Ω for red and green LEDs, respectively. Our prototype used red LEDs only, for minimum current drain.

We estimate that the current cost of components for this project is approximately

\$12.00

This includes sales tax, but not a battery or headband.


ROD IRVING ELECTRONICS

425 HIGH STREET, NORTHCOTE 3070, MELBOURNE, VICTORIA. Ph (03) 489 8131. Telex No. 38897

BOGGLE GOGGLES

\$9.60

Short form




PH METER

\$115




Driveway Sentry

\$32



Tacho/dwell meter with digital display




MAY EA 1982

\$62

12/240 volt Inverter

40 WATTS




MAY EA 1982


\$49.50

A.M. TUNER

(complete kit)



\$239



\$48.50

Engine Analyser Kit




JANUARY EA 1982

Eprom Programmer

\$55.00

INCLUDES TEXTOL SOCKET




\$189.00

Analogue and Digital Storage CRO Kit

STEREO SYNTHESISER FOR TUNERS AND VCRs


Enjoy the benefits of stereo sound from your video cassette recorder, TV or AM tuner with this Stereo Synthesiser. The circuit uses just four ICs and is easy to build.



\$55.00

SEPTEMBER EA 1982


Dual Tracking Power Supply



\$83.50

REMOTE INFRARED TV SOUND CONTROL

\$40



EA POWER UP

\$33

EA NOV 1982

Portable 3 1/2 Digit Heart Rate Monitor

JULY EA 1982

\$79.00




100w Sub-Woofer Amplifier

\$85.00




JULY EA 1982

Led Head Lightchaser



(Battery and headband extra)

\$12



PLUG PACK REGULATOR

\$14

Plugpack Extra

EA DIGITAL READOUT FOR SW RECIEVERS

\$72.00 COMPLETE


OCTOBER EA 1982



EA EASY-TO-BUILD FREEZER ALARM

\$21

OCTOBER EA 1982

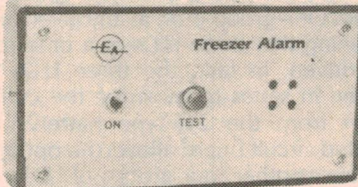

EA ELECTRONIC STARTER FOR FLUORESCENT LAMPS


\$5

OCTOBER EA 1982



EA GUITAR BOOSTER


\$17.50

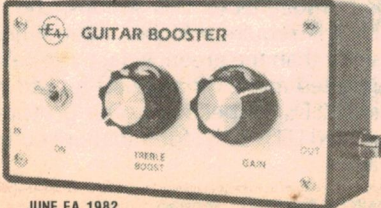

JUNE EA 1982

EA THEREMIN


\$34.50

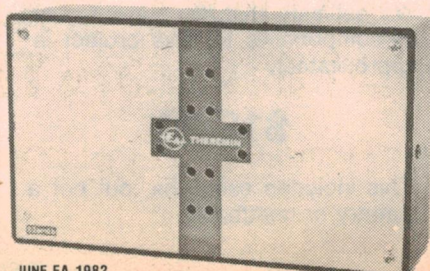

JUNE EA 1982

OVER 200 NOW SOLD EA INVERTER INCLUDING TRANSFORMER 300 WATTS

\$195



JUNE EA 1982

P & P \$10.00
Anywhere in Australia

Minimum P & P \$3.00 for kits

Actually, the values of 220Ω and 68Ω do not precisely equalise the operating currents. The green LEDs are purposely operated at a slightly higher current than the red to compensate for their lower efficiency. Amber and yellow LEDs are also available and their operating characteristics can generally be expected to fall between red and green LEDs.

Irrespective of the current limiting resistor used, the battery can be expected to have a shorter useful life if green LEDs are used. With three LEDs in series, the total forward voltage drop is $3 \times 2.6V$, or $7.8V$. Once the battery voltage falls below this level, the LEDs will not illuminate at all. Hence the useful life of the battery is the time it takes to discharge from a nominal $9V$ to $7.8V$, which, for a 216 battery, will be somewhat less than one hour. By comparison, the circuit will continue to function down to about $6V$ with red LEDs.

Construction

If you are housing the electronics for the project in a "zippy" box, make sure that the printed circuit board, coded 83eg1, fits into the box. The board has nominal dimensions of $46mm \times 60mm$, but it may need to be filed down slightly to fit into some boxes. Once this has been taken care of you can begin assembly of the PCB components. Mount the ICs last and earth the barrel of the soldering iron to the earth track of the PCB when doing so. Solder the earth pins (7 for the 4011 and 8 for the 4017) first, followed by the positive supply pin (14 and 16). This protects the ICs from static damage.

The box needs to have two holes drilled in it. One of these is for the switch

and the other is for the wires connecting to the LEDs. For a momentary contact pushbutton switch, a hole of $7mm$ is needed. Make sure you mount the switch high enough to clear the PCB. You can see from the photograph that the battery sits to one side of the box, so the hole for the wiring will have to be drilled with this in mind. This hole will most likely need to be about $4mm$, depending on the type of hook-up wire used.

To prepare the LEDs for mounting, bend the leads so that they are perpendicular to the encapsulation. This allows the LEDs to face forward (rather than upward) after mounting. Make sure that

you bend the leads the same way on each LED — for example, the anode always to the left.

Assembly will be simplified if the cloth is of the looped Terry-towelling type. The leads of the LEDs are pushed through the loops on the outside of the headband. If the leads are splayed by about 6 or $7mm$, the LEDs will be less prone to movement after assembly. Once the wiring was completed, we found that no other means of securing the LEDs was necessary with the qualification that a periodic re-alignment may be needed.

The method of connecting the series strings are as follows: LED 1 to LED 5 to LED 9; 2 to 6 to 10; 3 to 7 to 11; 4 to 8 to 12. Connect the LEDs anode to cathode, using links of hook-up wire which are long enough to accommodate the full stretch of the headband. The anodes of the first four LEDs are connected to the current limiting resistors and the cathodes of the last four LEDs are connected to the driving transistors. The cathode connections will have to be in the correct sequence or the chasing effect will be lost.

The wiring is the major part of the construction for this project so it is well worthwhile re-checking it before switch on. The LEDs may be damaged by having a reverse bias applied to them and this would undoubtedly be a cause for disappointment amongst potential LED Headers. If the circuit is operating correctly, you will be greeted with a chain of LEDs which appear to chase rapidly around the head. The speed at which they chase can easily be altered by changing the value of the $27k\Omega$ resistor.

Why not dazzle your friends with your LED-lit brilliance?

PARTS LIST

- 1 4017 CMOS decade counter
- 1 4011 CMOS quad two-input NAND gate
- 4 BC547 NPN transistors
- 12 LEDs (red)
- 1 $100\mu F/16VW$ electrolytic capacitor
- 1 $1\mu F$ non-polarised electrolytic
- 1 SPST momentary contact pushbutton switch
- 1 Plastic utility box, $28mm \times 54mm \times 83mm$
- 1 printed circuit board, $46mm \times 60mm$, code 83eg1
- 1 9V battery, Eveready 216 or equivalent (see text)
- 1 snap connector to suit battery

RESISTORS

- 1 $\times 1M\Omega$, 1 $\times 27k\Omega$, 4 $\times 10k\Omega$, 4 $\times 220\Omega$ (see text)

MISCELLANEOUS

- Rainbow cable, headband, solder.

BILCO ELECTRONICS

SHOP 2, 31 PULTNEY ST, DANDENONG 3175

PHONE: (03) 7918655

INDUSTRIAL RADIO REMOTE CONTROL

BASIC UNITS OR CUSTOM MADE FROM \$90 + TAX

THE DICK SMITH SYSTEM 80 GROWS WITH



**16K RAM
expandable to 48K,
CPU is the powerful
Z80 microprocessor -
that's the System 80...**

BLUE LABEL

Looking for a computer that's suitable for the beginner . . . but ideal for the expert? You want the new Dick Smith System 80 Blue Label! If you know absolutely nothing about computers, the System 80 is the ideal way to learn. If you know a little about computers, it's a great way to improve your knowledge. And if you know a lot about computers, you'll find the System 80 will go as far as you want it to - and further. The System 80 is expandable (with the optional S-100 expansion unit - see opposite page) to accommodate a huge range of options and accessories. You could even run a small business if you wished! Have a look at the superb new Blue Label System 80 soon. Anything else could be wasting your money!

Check these features:

- Flashing Cursor.
- Built-in speaker and Amplifier for programs with sound effects.
- Full upper and lower case video display capability.
- Screen print facility (obtain a printout of any 'page' appearing on the screen).
- Monitor program (suitable for the hobbyist to program in machine language).
- Access to enormous amounts of software that has been written for the TRS-80.
- Three month guarantee from date of purchase.
- Great expansion capability and flexibility.


Cat X-4005

*SEE OUR JANUARY MAILER FOR DETAILS

Expansion Connector, which lets you connect either the low-cost Printer Interface (X-4013) or the full Expansion Unit (X-4020). The X-4020 Expansion Unit gives you 16K of extra RAM, room for another 16K again, a disk drive controller and a printer port.

Modulated RF output so you can use a normal TV set as the video display (you can also use a video monitor).

Connection for second cassette.

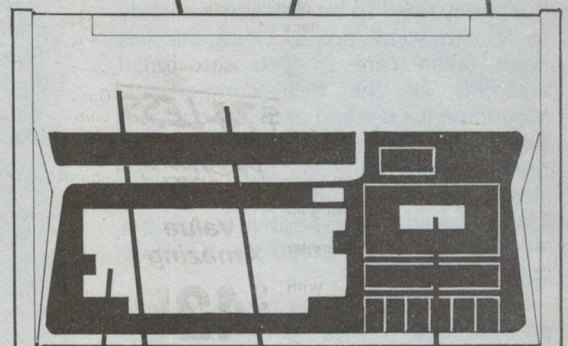

With System 80 there is no separate tape recorder To buy - it's inbuilt! Also there is provision for a second external recorder and the console has a level meter.

Powerful 12K Microsoft BASIC plus 16K of user memory (RAM), necessary for most serious programming and for using the huge range of software.

State-of-the-art microprocessor. At the heart of the System 80 is the modern Z80 chip, the industry standard because of its speed and powerful instruction set.

Full 52 key high tactile response keyboard. On System 80 you get a full typewriter-style keyboard with 52 normal keys and two additional function keys.

**WAS
\$750.00
ONLY
\$699**

**\$16.24 per week
(to approved
applicants)**



YOU!

"the best value around
for a ready built Computer"
— quotation from Electronics
Australia, June 1982.

**OVER
11,000
SOLD**

and
look at
our great
range of
printers

the **DICK SMITH
DOT MATRIX PRINTER**

**FAMOUS
SEIKOSHA
QUALITY**




ONLY

\$495

We sold hundreds of the previous model — and it was only for 204mm paper! This model is the same price — but it takes 240mm paper! If you don't need word processor quality — you can save a fortune! Cat X-3250

**BRAND NEW DOT MATRIX
PRINTER & WHAT A BEAUTY!**



ONLY Cat X-3260

\$970

Our very newest model — with built-in 2K buffer allowing storage of data to be printed — less down time on the computer. Numerous printing types. Superb (you've got to see to believe) high resolution graphics. You'll save hundreds of dollars on this printer! Accepts both standard stationery AND fan-form (tractor feed) paper.

the **Dick Smith
DAISY WHEEL PRINTER**


Delivers ultra-sharp clean copy up to 40cm wide! Uses standard paper, letterheads etc. Uses economical Diablo daisywheels and ribbon cartridges — so a wide range of fonts is available. Prints at three times the speed of a golf ball typewriter and is suitable for most currently available microcomputers. Cat X-3265

**VALUE AT
\$1999**



NEW!

**GIVE YOUR COMPUTER A VOICE!
SEE THE VOTRAX TYPE-N-TALK
WAS \$549 ONLY \$499** Cat X-3290

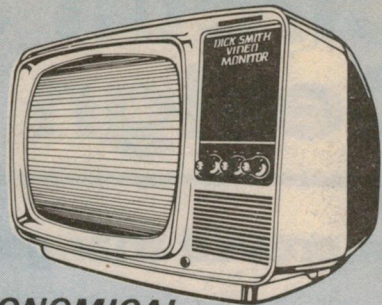

**ECONOMICAL
MONITOR**


\$149⁵⁰

A video monitor gives a sharper clearer image — this black & white monitor is really economical and can be used with most computers on the market. Cat X-1196

Why pay more?

& LOOK AT
THIS TOP
VALUE

**HI RES
GREEN
SCREEN
MONITOR**



ONLY

\$349

Anti-glare screen with its jitter and ghost free image makes viewing much easier and sharper. (allows 80 characters with 24 lines). A MUST for serious computer hobbyists or professionals. Cat X-1200

**DIRECT COUPLED & 1/2 PRICE
DATA PHONE MODEM**

A truly high performance direct coupled modem. Authorised by Telecom — and costs less than half the comparable acoustic modem! Simple plug-in connections, full duplex operation for speed & convenience. Ask for a brochure at your nearest Dick Smith Store! Cat X-3272



ONLY

\$199

**NEW AMATEUR
RADIO LOG**

Disk based program enables you to store the necessary information for up to 500 calls on a single disk, save it, retrieve and display it by call or sequence no. A must for the amateur radio operator! Cat X-3774

\$39⁵⁰


**NEW & INTERESTING
SOFTWARE**

Starfighter (Cat X-3674)	\$36.50
Air Traffic Controller (Cat X-3681)	\$12.50
Asylum (Cat X-3687)	\$19.50
The Institute (Cat X-3661)	\$27.50
Z-80 Disassembler (Cat X-3690)	\$24.50
Penetrator (Cat X-3673)	\$34.50
Newdos 80 Vs 2.0 (Cat X-3565)	\$199.00
Microsoft Fortran (Cat X-3669)	\$199.00
MMS Forth (Cat X-3668)	\$199.00

Unleash the
full potential
of your
System 80
with this

Expansion Unit

To get the most from your computer, you need to be able to add on all sorts of 'peripherals'; disk drives, printers etc. This unit gives interface ability and also a further 16K of memory with room for further 16K (giving a total of 48K). Cat X-4020




FEATURES :

- 16K of expansion RAM, room for 16K more.
- A floppy disk controller for controlling up to 4 disk drives giving up to 400K bytes.
- A Centronics-type parallel printer port.
- Optional S-100 interface with 2 vacant slots.
- An optional RS-232C serial communications port for modems & acoustic couplers. May also drive a teleprinter.

**\$74 LESS
THAN
PREVIOUS
MODEL!**

**Value
Amazing**

\$425



CHEAPEST PER BYTE!

**DICK SMITH
SYSTEM 80
DISK DRIVE**

Fast reliable disk drive that not only gives your System 80 dramatically increased speed but also increases effective memory. Your computer can handle much more involved programs, and much faster! Drive includes inbuilt power supply. Drive 0 — Cat X-4060 Drive 1 — Cat X-4061

ONLY

\$495

PRINTER CABLE

This is a universal printer cable for connecting any standard centronics-type printer (eg. our X-3250 or X-3260 printers) to either the X-4020 expansion unit or X-4013 printer interface.



Cat X-4014

\$57⁵⁰

**DAISY CHAIN
DRIVE CABLE**



The 'daisy chain' cable allows you to connect up to 4 disk drives, quickly & easily. Cat X-3232

\$42⁵⁰

Dick Smith Electronics

SEE PAGE 5-6 FOR ADDRESS DETAILS.



A 389

Circuit & Design Ideas

Interesting circuit ideas from readers and technical literature. While this material has been checked as far as possible for feasibility, the circuits have not been built and tested by us. As a consequence, we cannot accept responsibility, enter into correspondence or provide constructional details.

Improved triangle-to-sine-wave converter

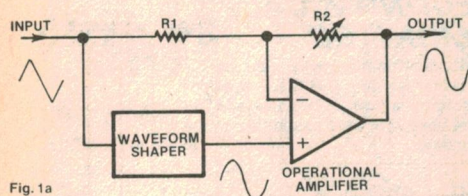


Fig. 1a

Most triangle-to-sine-wave converters employed in function generators are incapable of reducing the cusps (spikes or steps) on the triangle peaks, so that discontinuities occur in the sine-wave derivative. Typical function generators (such as the EA Function Generator for April, 1982) use diode or transistor shaping networks to round the peak of the triangle into a sine-wave, the networks being embodied into an IC, such as the XR2206.

This design (Fig.1a), taken from the US magazine "Electronics", follows the shaping network with an operational amplifier in which most of the remaining triangular component is cancelled. In addition, the design is not affected by small changes in the triangle wave amplitude.

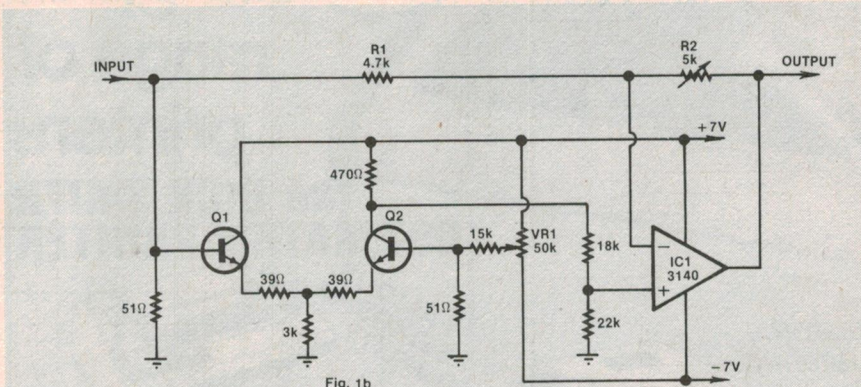


Fig. 1b

Fig. 1b shows the system in greater detail. The preliminary shaper is a differential amplifier consisting of Q1 and Q2. Any differences in transistor characteristics, which would generate even order harmonics in the output, can be taken care of by trimpot VR1. Finally, the shaped signal from Q2 is fed to the non-inverting input of the operational amplifier 3140.


At the same time a portion of the original triangular wave is fed to the in-

verting input, resistors R1 and R2 controlling the level. This level is adjusted until most of the remaining triangular component in the shaped wave has been cancelled.

The circuit is claimed to reduce odd harmonics by up to 52db to produce a resultant harmonic distortion of 0.4% for midband frequencies.

From "Electronics",
July 28, 1982.

Pre-regulator for EA power supply

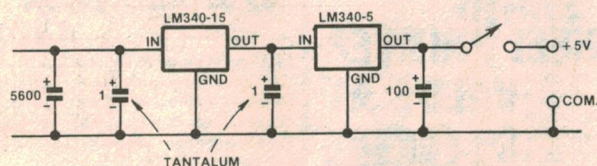

In the EA dual tracking power supply described in March 1982, the current from the fixed 5V output is limited to about 0.9A by temperature rise of the regulator. If an attempt is made to draw more than this current, thermal shutdown will occur.

This is because the voltage drop across the LM340-5 is 20 volts, thus producing a power dissipation of over 20 watts. Extra heat sinking is not feasible in the existing cabinet, so a pre-regulator (LM340-15) interposed between the unregulated line and the input of the LM340-5, and mounted

on the rear wall of the cabinet is the solution. The result is a drop of 10 volts across each regulator instead of 20 volts across just one.

While the same power (about 24 watts) still has to be dissipated by the same total heat sink area, it is now being generated at two different locations on the sink and this obviously helps. In any event the 5 volt output can now supply well over 1A continuously without thermal shutdown.

D. Bolton,
Melbourne State College,
Vic.

Hex display for EPROM Programmer


The EPROM programmer published in EA January 1982 uses discrete LEDs to display the Data and Address lines in binary code. As all EPROM programs are written in hexadecimal code, a hex display is an advantage. The Address is displayed as a three-digit hex code, while the Data is displayed in a two-digit code.

As is usual when seven-segment displays are used for alphanumeric hex characters, the display format is a mixture of upper and lower case, as follows: A, C, D, E and F.

The circuit operates as follows: A 555 oscillator clocks a 74LS93 binary counter which is connected to count to eight and drive a 7442 BCD-to-decimal decoder. This is connected to drive the common cathodes of the multiplexed display. The output of 74LS93 three-bit counter is also used to scan the 4051 one-of-eight line multiplexers, which multiplex the Address and Data codes.

continued on page 79

Hex display . . . ctd from page 78

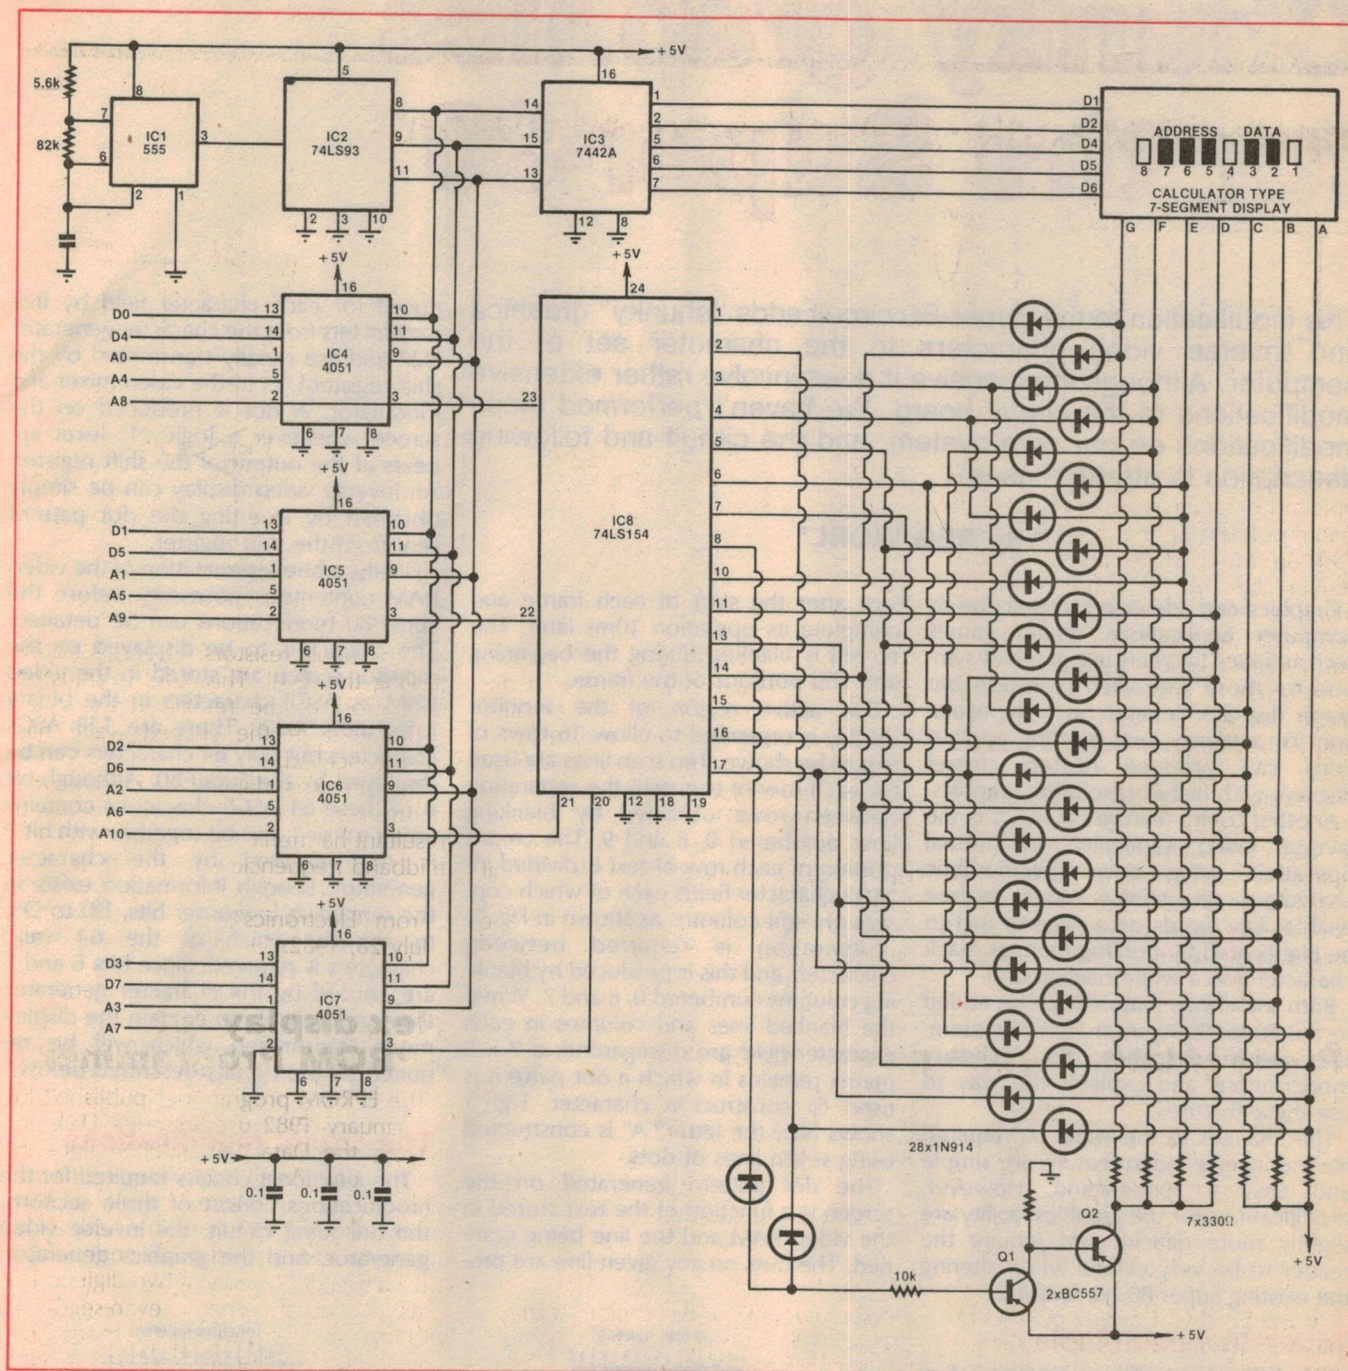

The four-bit binary code from the multiplexer is used to drive a seven-segment display through the use of a 74LS154 four-line to 16-line demultiplexer and 28 diodes. The 74LS154 converts the 16 different binary codes to separate hex displays. Each output is connected to diodes which turn off selected segments to produce the required character.

For example, when the binary code for

"3" is present at the input of the decoder, the "e" and "f" segments are turned off, to show the number three.

There are two reasons to turn the segments off rather than on. The first is that the outputs of the 74LS154 are active low and the second is that less diodes are required through the use of this method (on average, more segments are on than off). The numbers one and seven have more segments off than on

and this would require the 74LS154 to sink more than its rated current. Hence, the two transistors disable the unwanted segments when these numbers are displayed.

Note that the increase in overall current consumption because of the addition of this circuit to the Eprom Programmer means that a heatsink should be fitted to the three-terminal regulator.

D. H. Dawes, Granville, NSW.

Circuit modification gives inverse and . . .

Chunky graphics for the Super-80

This modification to the Super-80 circuit adds "chunky" graphics and inverse video characters to the character set of the computer. Although inexpensive it does involve rather extensive modifications to the circuit board. We haven't performed these modifications on our own system, and the circuit and following description is offered "as is".

By REG WORL*

Graphics can add enormous scope to computer applications. Video games such as Space Invaders use graphics symbols for those little alien monsters, bar graph displays depend on high resolution for accuracy, and plotting applications can produce neater, clearer displays with higher resolution graphics.

Another useful feature on VDUs is the inverse video capability. In normal operation using only alphanumeric characters, an inverse video feature enables key words on a page of text to be highlighted by printing them as black characters on a white background.

Both the above features can be added to the Super-80 microprocessor system. This article describes the necessary modifications and explains the way to use these features.

The changes to the Super-80 required for the inverse video feature are simple and easy to understand. However, modifications for the graphics facility are slightly more difficult and require the reader to be very careful when altering the existing Super-80 hardware.

Super-80 video display

To assist the reader in understanding how these modifications will affect the Super-80 system, a brief description of the video display format is necessary.

The video circuitry of the Super-80 refreshes the screen once every 20ms. Throughout each frame interval the microprocessor is halted for 10ms to allow the contents of the video area of memory to be transferred to the video display circuitry. The video circuitry starts to write characters onto the screen

5ms after the start of each frame and complete its operation 10ms later. The screen is blanked during the beginning and end portions of the frame.

The active region of the monitor display is organised to allow 16 rows of text to be shown. Ten scan lines are used for each row of text with the separation between rows obtained by blanking lines numbered 0, 8 and 9. The centre portion of each row of text is divided into 32 character fields each of which consists of eight columns as shown in Fig. 1.

Separation is required between characters and this is produced by blanking columns numbered 0, 6 and 7. When the blanked lines and columns in each character field are disregarded, a 7 x 5 matrix remains in which a dot pattern is used to construct a character. Fig. 1 shows how the letter "A" is constructed using seven lines of dots.

The dot pattern generated on the screen is a function of the text stored in the video RAM and the line being scanned. The dots on any given line are pro-

duced for each character field by five parallel bits from the character generator U27 and are serially transmitted by the shift register U23 to the video mixer and modulator. A dot is produced on the screen whenever a logic "1" level appears at the output of the shift register. An inverse video display can be simply obtained by inverting the dot pattern sent from the shift register.

Finally, a brief examination of the video RAM contents is necessary before the Super-80 modifications can be detailed. The characters to be displayed on the monitor screen are stored in the video RAM as ASCII characters in the binary form 0XXX XXXX. There are 128 ASCII characters but only 64 characters can be displayed by the Super-80. Although bit 6 of these 64 ASCII characters contains either a 0 or 1, this bit together with bit 7 is not required by the character generator. Enough information exists in the remaining low-order bits, D0 to D5, to decode which of the 64 valid characters is required. Since bits 6 and 7 are unused by the character generator they are available to contain the display mode information which will be required by the circuits described below.

The circuit modifications

The additional circuits required for the modifications consist of three sections; the decoding circuit, the inverse video generator, and the graphics generator.

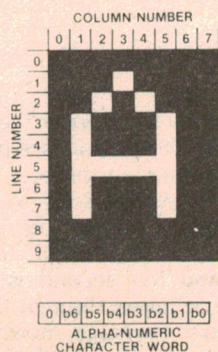


Fig. 1

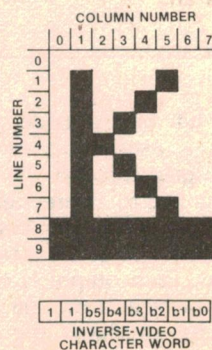


Fig. 3

*67 Conrad St, St Albans, Vic 3021.

Characters are built up in an 8x8 matrix.

Inverse characters are black on white.

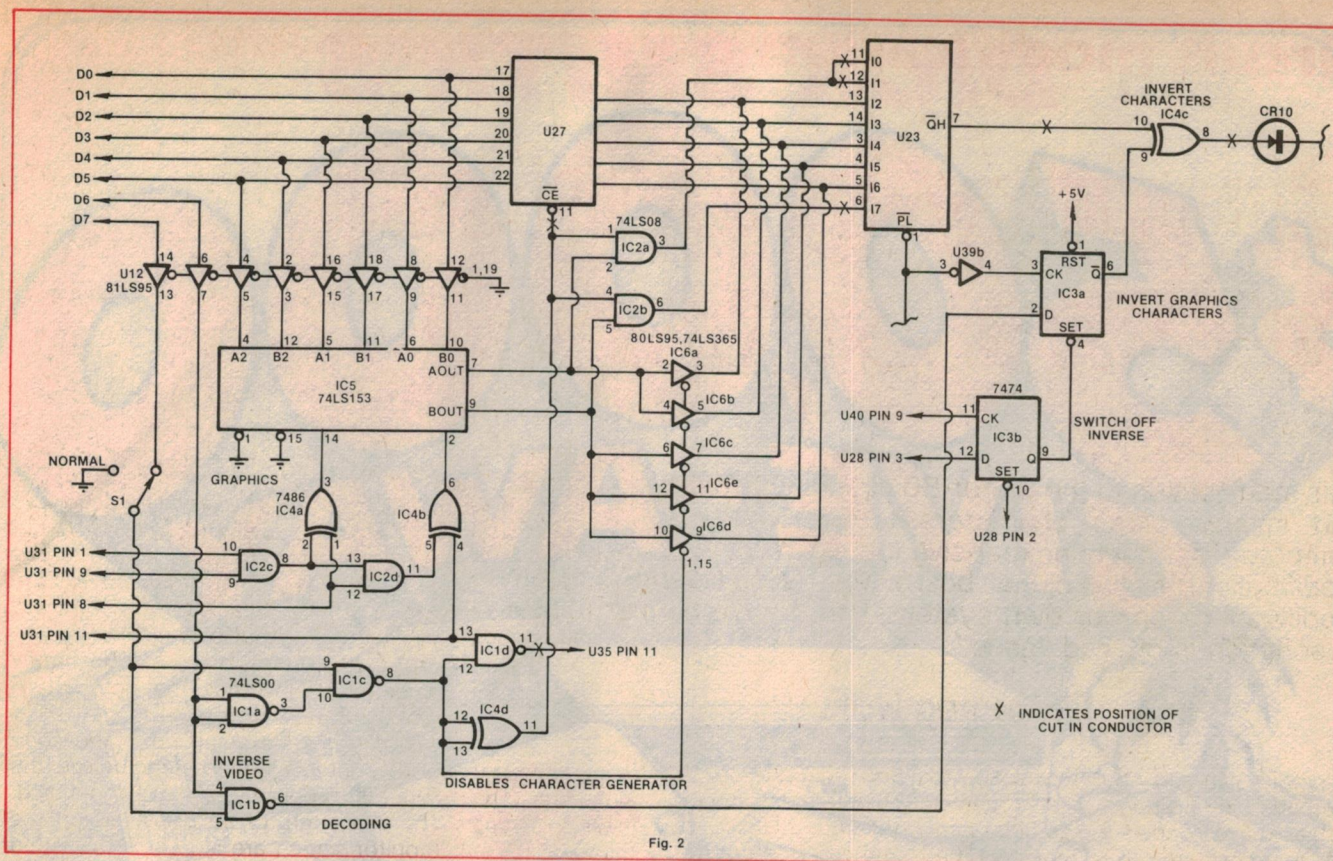


Fig. 2

"X" indicates a track to be cut on the existing board. "IC" prefix indicates a device to be added to Super-80 circuit.

The circuit diagram for the complete modifications is shown in Fig. 2.

The function of the decoding circuit is to determine from the encoded information in bits 6 and 7 of each video character word which of the three possible display modes (normal, inverse video, or graphics) is required to display that character. The selected display mode is then produced by enabling the respective circuits. The codes for the three display modes are given in Table 1 and have been so arranged that all characters written to the screen by the Monitor are displayed in their normal mode. This arrangement allows the user to retain the normal operation of the Super-80 without the need of any software changes.

The decoding circuit consists of four NAND gates and an exclusive OR gate IC4d. Gate IC1b activates the inverse-video circuit when required and gate IC1c controls the graphics circuitry. In the graphics mode the character generator is not required and is hence disabled by gate IC4d. Switch S1 is an option which may also be added although it would generally not be required. Operating this switch would completely disable the inverse video and graphics generator circuits allowing normal operation of the basic Super-80.

The inverse video generator is a simple circuit consisting of four components: the D flipflops IC3a and IC3b, an ex-

clusive OR gate IC4c, and the inverter U39b. When this circuit is selected by the decoder circuit a logic 1 is applied to flipflop IC3a. The input signal is clocked through the flipflop at the beginning of each character field and controls the programmable inverter for the display duration of that character. Flipflop IC3b ensures that the inverse video is switched off after the last character on each row. The display produced by the inverse video generator is shown in Fig. 3.

FUNCTION	BIT 7	BIT 6
NORMAL OPERATION	0	0
NORMAL OPERATION	0	1
GRAPHICS	1	0
INVERSE VIDEO	1	1

TABLE 1

New features are accessed by setting data bits 6 or 7. Software is unchanged.

Note that the two separation lines at the bottom of the character field remain blanked.

To display a character in the inverse video mode, bits 6 and 7 of the character word must contain the code "11". Normal characters can be changed to this mode by "OR-ing" them with 1100 0000 binary or C0 hex before they are placed into the video RAM. Characters stored by a user program can be read and replaced by a user program to produce an inverse video display.

Graphics mode

Unlike the normal and inverse video display modes, the graphics mode uses the entire character field by eliminating the previously blanked lines and columns used for row and character separation. The line blanking is controlled by the output of gate U39b. In order to disable the line blanking during a graphics character, U39b is replaced by the NAND gate IC1d which is enabled as required by the decoding circuit. Note that U39b must have both its input and output disconnected from this circuit because it is re-used in the inverse video circuit. The grounded shift register inputs 10, 11 and 17 which cause the blank columns must also be disconnected and connected to the two AND gates IC2a and IC2b. The decoding circuit activates these gates to inhibit column blanking during the graphics mode.

Each graphics character consists of six pixels which together occupy the entire character field. The pixels are numbered as shown in Fig. 4 and are controlled by the respective bits in the character code. Since the dot patterns are now directly controlled by the character codes, the character generator U27 is no longer required and has its output replaced by the Tri-state buffers IC6a to IC6d. The 74LS153 decoder selects which of the character code pairs b0-b1, b2-b3, or b4-b5 is required for each of the 10 lines

DICK SMITH'S

\$50,000 GIVE-AWAY

Grace Bros Travel
FREE EASY
FIJIAN HOLIDAY
FOR TWO
STAYING AT
HYATT REGENCY FIJI

ARLEC

- ★ ARLEC TIMER SWITCHES.
- ★ ARLEC DISCO LIGHTS.
- ★ DICK SMITH COMPUTER CHESS SETS.
- ★ DICK SMITH POCKET COMS.
- ★ DICK SMITH CASSETTES.

**VIDEO
CASSETTE
RECORDERS
FROM
TOSHIBA**

**WIZARD
TV GAMES**

PLUS A FREE CARTRIDGE
WITH EACH WIZZARD!

**TEAC
HI FI
SYSTEMS**

**SCOPE
50 SCOPE
SOLDERING IRONS**

**ALMOST
9000
PRIZES!**

JUST MATCH UP & WIN!

Yes! You could be an instant winner in our Mighty Match Up competition - with over \$50,000 worth of prizes. Every purchaser* at a Dick Smith store gets a free ticket - open it up and win an instant prize, or save until you get matching halves. It could be you!

RAFFLES AND BINGO PERMIT BOARD, Permit No.: 82 207 issued on 6/12/82.
Permit No.: TC 82 1943 issued under the Lotteries and Art Unions Act.

* SA Customers: No purchase required - simply send a stamped, self-addressed envelope to PO Box 321 North Ryde and we'll send you a ticket.

Competition during January and February 1983
only - so hurry in!

AT YOUR NEAREST DICK SMITH STORE

See full address details on pages 5-6.

A406

in every row. The selected bit pair is then loaded into all eight inputs of the shift register for transmission to the screen. The gates IC2c, 2d, 4a and 4b determine which bit pair is to be selected. Note that these modifications cause the prompt placed at the left of each row by the monitor to be displayed as a graphics character.

With this modification each character cell is divided into two blocks horizontally and three blocks vertically. Since normally 16 lines of 32 characters each are displayed on the screen, the effective resolution in the graphics mode in 64 blocks horizontally by 48 vertically.

When writing programs which will require the graphics facilities, it is best to obtain the codes for the various graphics characters from a table. Table 2 has been provided for this purpose. To use this table construct the required character by selecting the necessary pixel combinations from both parts of the table. The codes given with the selected combinations are then combined to give the character code.

To ensure that these modifications do not interfere with the operation of the microprocessor due to loading or incorrect construction, the data bus is isolated from the additional circuits through the buffer U12. The additional components required for these modifications can all be installed on the existing Super-80 board. The six packages IC1 to IC6 occupy the spare pads at the rear of the microprocessor board whilst IC U12 is added to the S-100 expansion area.

Note, though, that if you elect to do this the S-100 expansion interface cannot be used, as U12 is normally used as a buffer for data to the S-100 expansion connector.

Care required

These modifications require fairly extensive "surgery" on the circuit board of the Super-80. There are nine tracks to be cut and 15 wire connections to the existing computer circuitry, apart from the inter-connection of the new ICs. This is not a project for the beginner.

The positions of the tracks to be cut or are shown by an "X" on the circuit diagram of Fig. 2.

If you are thinking of building a Super-80 but have not yet begun, finding and cutting the required tracks is relatively easy. If your Super-80 is already completed it will be necessary to remove ICs U27 and U23 to gain access to the tracks to be cut. For those who have used IC sockets a simple alternative to cutting tracks is to remove the ICs from their sockets, bend the pins to be disconnected upwards and re-install the

ICs. The necessary wire connections can then be made directly to these pins.

It is suggested that 30AWG insulated wire (as used for wire-wrapping) be used for the modified connections. This wire is thin enough to allow several pieces to be twisted together and soldered to a single printed circuit pad. Care must be

LINE NUMBER	COLUMN NUMBER								
	0	1	2	3	4	5	6	7	
0									
1			b0					b1	
2									
3									
4			b2					b3	
5									
6									
7									
8			b4					b5	
9									

1 0 b5 b4 b3 b2 b1 b0

GRAPHICS CHARACTER WORD

Fig. 4


Graphics are set by six lowest data bits.

taken to avoid solder bridges and connections made to wrong locations.

Where a cut needs to be made through a conductor it is recommended that two parallel cuts 2mm apart be made across the conductor with a sharp blade. A clean, hot soldering iron is then used to heat the strip between the cuts until it lifts away from the board. This procedure ensures that a reliable cut is obtained. Ensure that enough track remains on each side of the cut to allow a link to be soldered in should the cut ever need to be repaired.

After these modifications have been completed, the Super-80 video display should appear as normal but with the Monitor prompt displayed as a graphics character. These modifications can be tested by using the Monitor "E" command to place various character codes into the video RAM buffer. For a 16k system the monitor selects the memory block from 3E00 hex to 3FFF hex as the video RAM area. Any character code placed in this area will be displayed on the screen in the display mode determined by bits 6 and 7 of the code.

For a 32K Super-80 the video RAM area

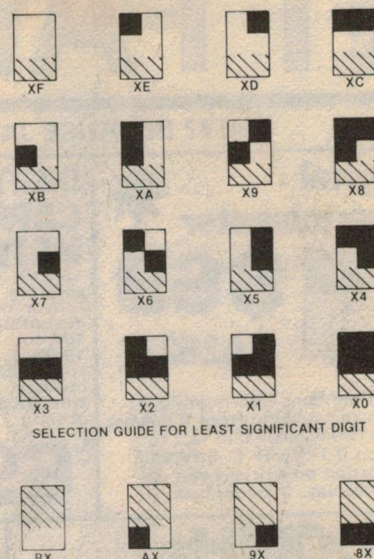

SELECTION GUIDE FOR LEAST SIGNIFICANT DIGIT

SELECTION GUIDE FOR MOST SIGNIFICANT DIGIT

TABLE 2

Table shows each graphics shape produced.

is normally from 7E00 to 7FFF, while 48K machines place the video RAM at BE00 to BFFF.

Editorial note

Super-80 owners should be aware of two other graphics add-ons. Dick Smith Electronics offers a board containing an EPROM providing lower case and inverse video characters which is installed in place of the existing character generator, with some modifications to the circuit character clocking circuitry. This board was reviewed in EA, February 1982, p111.

EL Graphix offers a similar board with a choice of three different EPROMs, one providing quarter-character sized graphics blocks and other symbols and another providing one-sixth sized blocks. The third EPROM provides both the character sets. This board was featured in EA, August 1982.

Neither of these two boards require extensive modifications to the Super-80 circuit board. Since they use an EPROM for character storage, however, they are more expensive than the approach described here.

Software for the Super-80


Here Are The Program Headings: Poker Machine simulation, Printing Demonstration, Calendar Calculator, Othello Game, Investment Analysis, Guessing Game, List and Sort, "Fred the Shrink", Simple Maths Drill, Lotto Number Selector, Triangle Solutions, Mortar Attack Game, Caves & Monsters, Amateur Radio Q-code Tutorial, Caravan Park Directory, Super Pokey Game, Tattsлото Selector.

NOTE: This book is exclusive to "Electronics Australia" and is available only from "Electronics Australia", 57 Regent St, Chippendale. PRICE \$4.00 OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. PRICE \$4.00 plus \$1.00 for packaging and posting anywhere in Australia.

IT PAYS TO BUY YO

WHY? BECAUSE JAYCAR KITS COST NO MORE & ARE BETTER QUALITY

Digital Thermometer



\$69
EA282

Read the temperature in your room (or outside) from 0 degrees C to 100 degrees C in fact to within 0.1 degree C. Fantastic resolution on a bright easy-to-read display. Includes case.

DIGITAL CAPACITANCE METER


Ref: EA 3/82
This kit once again uses the amazing DPM 200 LCD /driver module. Capable of measuring capacitance from 1pF to 19.99uF. It is a must in every workshop or lab.



\$69

HEART RATE MONITOR

Ref: EA 7/82
WAS \$79 SAVE \$10




Now **\$69**
This unit enables you to measure your own pulse instantly and accurately. It is light enough even for joggers to carry. A must for people who may have heart problems. Complete kit including LCD Display.

MAINS FILTER

250V AC
@ 3A.

Includes data sheet. The most economical mains filter available!!



\$14.50

500MHz Digital Frequency Period Meter

REF: EA Dec '81 - Feb '82



ONLY **\$119**

Other people may appear to be selling this kit for less. But you GET less!!! Exclusive Jaycar features:

- * Heavy gauge front panel. Pre-punched and silkscreened. (NOT Scotchcal).
 - * Low aging rate 10.000MHz crystal
 - * Quality IC sockets provided (A MUST)
 - * All metal film resistors used (1% 50ppm)
 - * Thermalloy heatsink for +5V reg.
- Beware of advertised units that do not conform to the original design. They may have inferior performance.

EXCLUSIVE

Gold plated BNC Input Connectors
500MHz option only \$26 extra

50MHz version \$119

Tilting bail to suit ONLY \$4.95

Function Generator

FREE! TILTING BAIL WORTH \$4.95 included



Ref: EA April 1982

\$99

"Pigeon Pair" companion to the new 500MHz DFM. Low distortion generator of sine, square and triangular waveforms. From below 20Hz to over 160kHz. Inbuilt 4 digit frequency counter in de-luxe Pac-Tec case. Only \$85 JAYCAR EXCLUSIVE - 1% 50ppm metal film resistors used for stability


STEREO STEREO STEREO STEREO

Synthesiser

Creates a very realistic stereo sound from mono sources i.e. AM tuners, TV or video units Very easy to build and comes complete.


ONLY

\$49.50



COMPLETE

Ref: EA September 1982

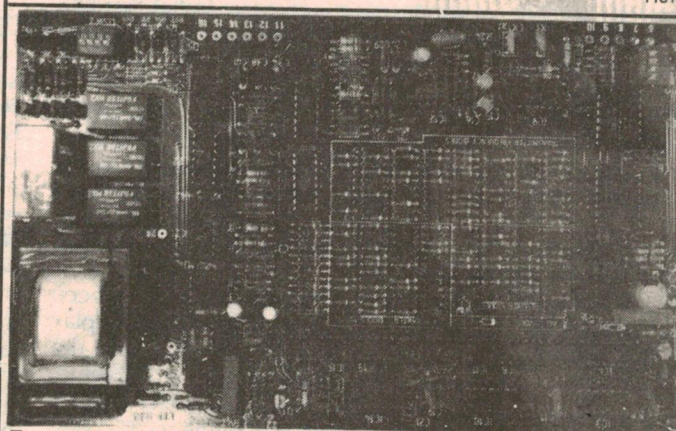

ETI 644 direct connect modem

Ref: ETI October 1982

SHORTFORM KIT

\$169

FULL KIT

\$189 NEW

Two models (i) Short form which contains ALL PCB components as specified by ETI (BEWARE!!). The genuine ETI PCB with plated-thru holes, solder mask and component overlay is supplied. We also supply at NO EXTRA CHARGE a full set of quality I.C. sockets. A must with plated-thru PCB's Remember this when making comparisons. (ii) Full kit. Includes: all of above plus 12V plugpack, case, front panel, switch and LED bezel and Cannon DB-25 RS-232 connector. Makes a complete stand alonemodem.

* Capable of a range of Answer/Originate operating modes * Selectable Baud rate * Software controlled * Uses new patented technique * More reliable and faster than most acoustic modems.

ARLEC TRANSFORMER AS USED IN THIS PROJECT \$22.00 * * * * *

Lyrebird Piano Kit NEW LOW PRICE...

GREAT NEW FEATURES!!

- FREE! A stand (like the one illustrated but not exactly the same). Worth around \$50 but yours at no extra charge with each 73 or 88 note kit.
- FREE! A soldering iron (worth around \$19). Yours to keep to give years of faithful service after you have completed your Lyrebird. (88 note only)
- FREE! A 200g roll of solder. You will need some to build the Lyrebird but there will be plenty left over for other projects. (73 & 88 note versions).
- FREE! Quality IC sockets provided in both kits.

REF: EA 11/81-1/82

7% OCTAVE
(88 NOTE)
VERSION
\$589

UR KITS FROM US

WHY? BECAUSE JAYCAR KITS COST NO MORE & ARE BETTER QUALITY



NEW

EA FUZZ BOX KIT

Ref: EA January 1981
Economical way to get great guitar sounds! The Jaycar kit contains a heavy duty foot-switch and diecast box. All components only

\$19.50

Staggering value



'Power UP'

ONLY

\$39.50

Ref: EA 11/82


What will they think of next??!! Sensational project that detects the current drawn by one appliance to switch on up to 4 others — AUTOMATICALLY!

Great for computers, component Hi Fi etc. when you have to normally switch on several items in a system. Will switch total load of 240V 10A.

Complete kit including outlets, box, mains relay etc. **ONLY \$39.50**

EA CAR COMPUTER KIT

Ref: August EA 1982

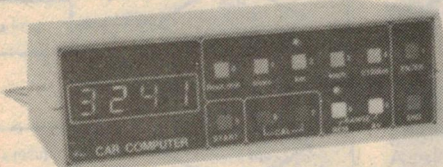

BUY THE WHOLE KIT (inc. Fuel & Speed Sensors) FOR ONLY \$159.00!!

WE TOO have the genuine Moray fuel sensor. We buy it from the same factory as Dick Smith!! We also have an EA APPROVED Speedo Cable Sensor. The speedo cable sensor gives better results at very low speed.

PRICING INFORMATION: ALL ELECTRONICS including both PCB's plated through, programmed EPROM, 1% metal resistors, and other high spec. components. You also get a choice of either tailshaft or speedo cable type speed sensor (please specify) — **ONLY \$99.50**

Pre-punched genuine American PACTEC case (as used by EA) and not a Hong Kong copy, with special silk-screened front panel and multi-way connector **ONLY \$39.50**

Tailshaft Speed Sensor **ONLY \$14.50**

Speedo Cable Sensor **ONLY \$29.50**

'T' Piece Jaycar exclusive **ONLY \$3.95**


Genuine Moray Fuel Flow Sensor **ONLY \$49.50**

NEW KITS NEW KITS NEW KITS NEW KITS

TRANSISTOR ASSISTED IGNITION
Ref: EA January 1983. This kit is a fantastic popular kit!! The Jaycar kit comes with a genuine box — as used in the EA prototype. Beware of others that use flimsy sheet metal boxes!! Ask us about the 100% option.

ONLY \$35.00 COMPLETE!!!

LED HEAD




Ref: EA January 1983.

Wire your head for light!! Complete kit (sweatband extra)



ONLY \$9.95

MASSIVE LCD DISPLAY SELLOUT!!!



Jaycar has purchased a massive range (probably Australia's largest) of LCD Displays. Clock displays, multi-digit, multi-function, alphanumeric and dot matrix included!! We are liquidating these to pay for new lines. Advertising deadlines prevent us from going into further details. If you want to know more (before our Feb ad) send SAE for a list (with quantities & prices).

LCD DISPLAYS FROM \$1.00 EACH!!!

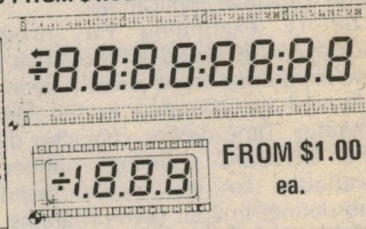

FROM \$1.00

ea.

NEW

DIGITAL pH METER KIT

At last a true scientific instrument for a fraction of the cost of commercial units. Great for checking swimming pools, fish tanks and countless other uses.

The Jaycar kit comes complete with DPM-05 display, ABS case and all components as specified by EA.

'Ionode' probe to suit only \$69

Ref: EA December 1982



ONLY \$69.00

syntom

As used by Warren Cann of 'Ultravox'

Original design from the UK magazine 'Electronics and Music Maker' April 1981. Self-contained unit produces a variety of fixed and falling pitch effects. Trigger by tapping the unit itself or by striking a drum to which the unit is attached. The Jaycar 'SYNTOM' comes complete with high quality pre-drilled moulded all ABS box 152 x 80 x 47mm with professional silk-screened front panel.

FEATURES: Decay from less than 0.1 second to several seconds, pitch control, sweep control and volume on/off.

ONLY

\$36.50



NEW LOW PRICE!! Because we are shipping keyboards and other expensive components in bulk due to high demand, we can pass savings on to YOU.

You can now have a magnificent "Lyrebird" 6 octave touch sensitive piano now for only \$475!! That's a staggering \$50 off the old price. REMEMBER!! THE LYREBIRD OUTPERFORMS READY BUILT PIANOS COSTING UP TO THOUSANDS OF DOLLARS MORE. WHY PAY MORE WHEN YOUR CONSTRUCTION KNOWLEDGE CAN SAVE YOU A FORTUNE?

Jaycar

NUMBER 1 FOR KITS

125 York Street, Sydney 2000
Phone: 264 6688 Telex: 72293

"Nevilles Corner"
Cnr. Carlingford & Pennant Hills Road,
Carlingford
Phone: 872 4422

Mail Orders To: Box K-39 Haymarket
Sydney 2000

POST AND PACKING CHARGES
\$5-\$9.99 (\$1.20) \$10-\$24.99 (\$2.40)
\$25-\$49.99 (\$3.50) \$50-\$99.99 (\$4.50)
\$100 up (\$6.20)

NEW SHOP HOURS
Mon-Fri 8.30 to 5.30pm
Sat 8.30 to 12.00pm
Thurs night to 8.30pm

MAIL ORDER BY
BANKCARD VIA
YOUR PHONE



YOU CAN PHONE CARLINGFORD ON 872 4444 AS WELL!
ELECTRONICS Australia, January, 1983

DATUM: games and software design

DATUM, a "Digital Aid for Teaching you Microprocessors", is a single board microprocessor trainer based on the MC6802 processor. Construction and programming have been covered in previous articles. This final instalment provides more programming details, including three useful examples to show what can be done.

Although called a minimal microprocessor system, DATUM is actually quite powerful, with applications limited only by the user's imagination and programming abilities. Skill in programming comes with experience, but to get things started this article has a few examples. They have been written as games, but lend themselves readily to more practical applications.

Before examining the programs however, we should point out that many useful routines have already been written and incorporated in the DATUM monitor. Time delays, character display and keyboard scanning routines are available to be incorporated as subroutines in your own programs.

Table 1 provides the names and starting addresses of useful subroutines in the DATUM monitor and comments on

their use. There is a penalty for using them, however — single stepping through ROM routines is not possible. A single-step jump to a monitor routine simply brings up a prompt and halts execution. In some cases this can be overcome by copying the monitor routine into RAM, with appropriate address changes.

An alternative method of debugging programs which incorporate monitor routines is to single step up to the point of the jump to the monitor subroutine, reset and then recommence single stepping at the instruction following the subroutine call. We can, after all, assume that the monitor subroutine itself is correct.

When writing programs it is good practice to finish with a software interrupt instruction (3F). Should there be an error in

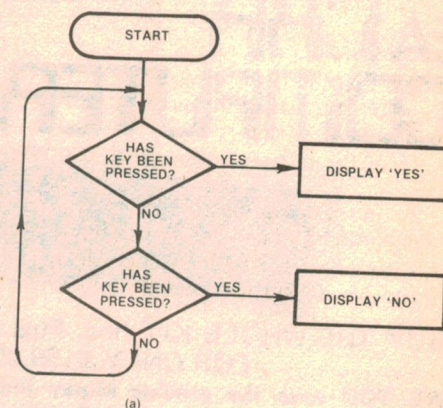


Fig. 1 (a) shows the flowchart for a simple decision-maker program loop.


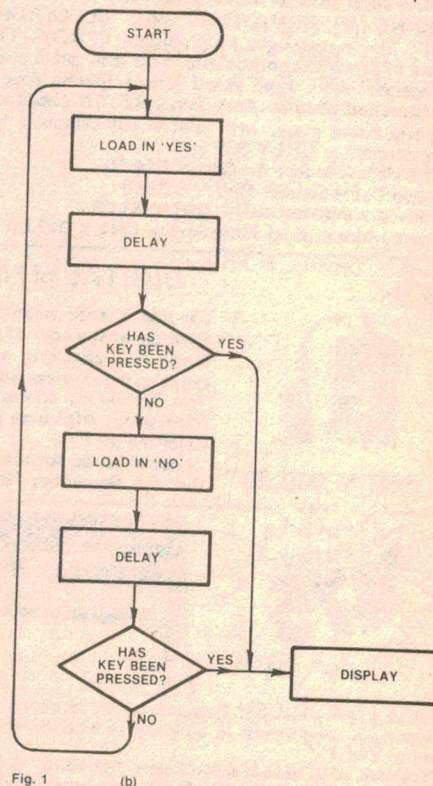


Fig. 1

Fig. 1(b) shows a more complex approach to the same problem which is more flexible, allowing the use of common subroutines.

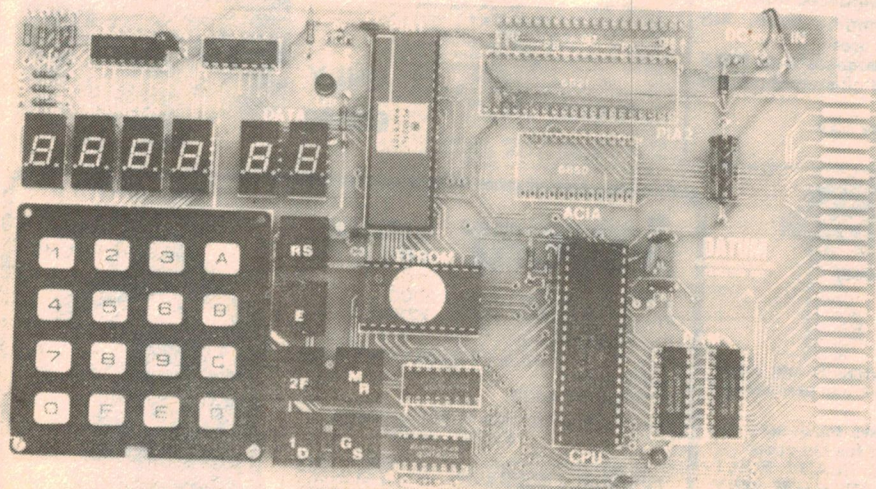

Repeated from last issue, this photo shows the completed DATUM microprocessor board. Construction and Monitor software have been covered in previous articles.

87

DATUM: Flowchart for Program 2

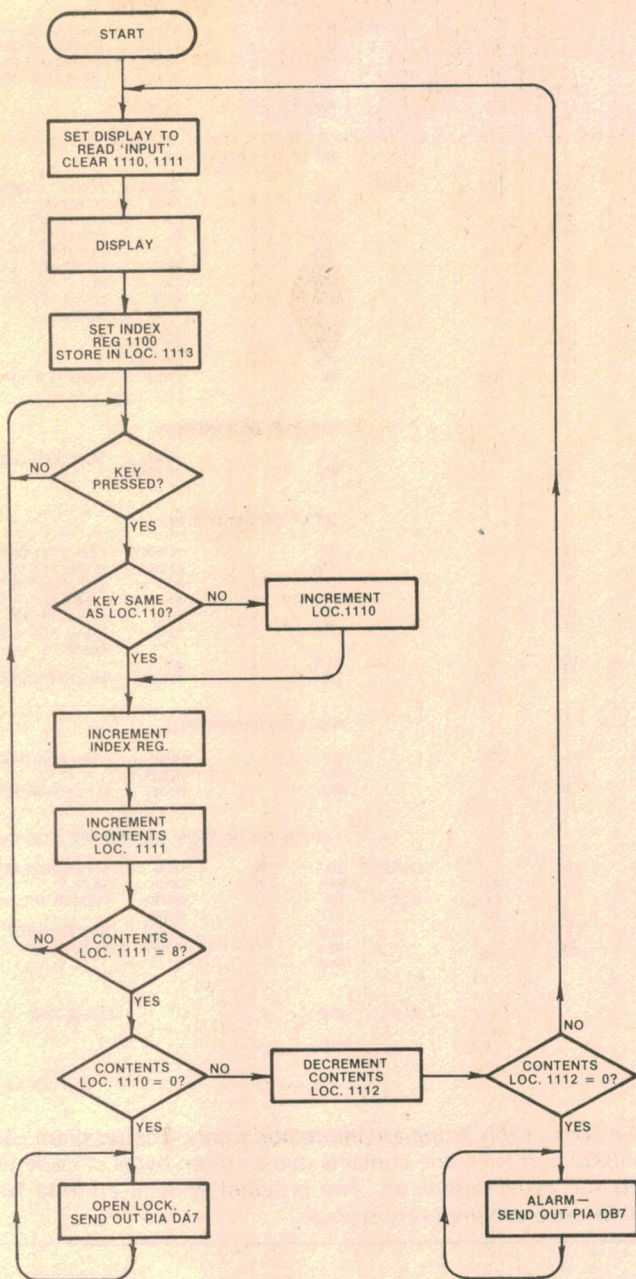


Fig. 2

The final box in the flow diagram is for displaying the characters already set up in the display buffers. Again a monitor subroutine can be employed, namely DISPLAY (71DD). This particular routine only displays a character for a few milliseconds so a small loop is introduced to hold the display for a longer period. Since DISPLAY makes use of both the A and B accumulators, the display counter is stored in memory location 1060. In the program given in listing 1 the value fed in is 80, providing a display for about 2½ seconds. Although not previously mentioned, a further advan-

tage of flow diagram (1b) is that when the display is terminated the decision maker is immediately ready for another decision.

Combination lock

The second program may be considered as a guessing game but it also provides the basis for a combination lock system. An N-bit code are stored in the memory and when the user keys in the correct code the lock is energised and allowed to be open. In this example N is set equal to 8 but the value can readily

be changed. If someone tries to break the code they are allowed three attempts before an alarm operates. Outputs to the lock and alarm are through the PIA data lines DA7 and DB7 respectively at the top of the board. Values on these lines can be confirmed using the logic probe. Fig. 2 shows the flow diagram for the program.

The majority of the programming routines have been discussed previously, with the exception of outputting a signal to the PIA. The eight digits of the correct combination are stored in memory locations 1100 to 1107 by the operator before the program is run. The number of errors in entering the combination is stored in location 1110, the number of times the keys are pressed per try in 1111 and the number of attempts to input the correct code is stored in location 1112.


Because the key input subroutine makes use of the index register, the contents of this register must be saved prior to calling the input subroutine. Memory locations 1113 and 1114 are used for this purpose. Listing 2 shows the complete program.

The PIA may be divided into two nearly identical halves, A and B. Each has three registers, the control register, the data direction register ("0" = input a signal; "1" = output a signal) and the actual data register. Only two address lines are used for each half of the PIA, the data direction and data registers sharing one address. The addresses used in DATUM for the display PIA are given in Table 2. To decide between the two registers that have a common address, bit 2 of the control register is employed. A zero in bit 2 allows the data direction register to be addressed while a 1 addresses the data register. Thus the sequence in setting up the A half of the PIA for outputting a signal is as follows:

- Set up the control register (address 6001) with a 0 in bit 2 position.
- Next set the data direction register (address 6000) to all 1's for output of data.
- Readdress the control register now putting a 1 in bit 2 position so that the data register will now be address at 6000.
- Finally, send the data out.

This sequence is used twice in the program, once to open the lock if the correct code is fed in and the second time to initiate the alarm signal. Notice that after sending information to the PIA the program jumps back to hold this instruction. If this is not done the monitor returns the display PIA to its normal role and the output immediately goes high again.

Should you wish to develop this program further for use as a safe lock or something similar, then the hex key pad

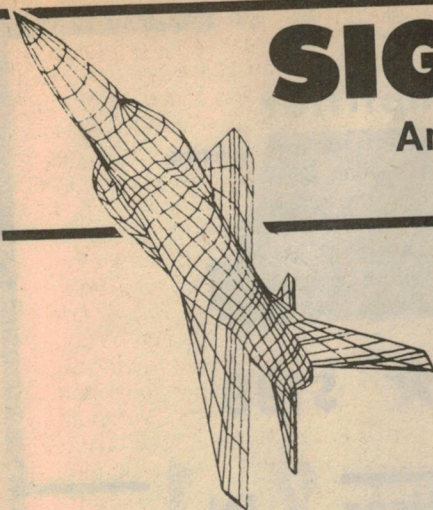

SIGGRAPH-ACS


An Australasian Special Interest Group
on Computer Graphics



Member of I.F.I.P. — (International Federation for Information Processing) National Special Interest Group of the Australasian Computer Society Inc.

SIGGRAPH-ACS Membership offers:

1. A publication "THE AUSTRALASIAN SIGGRAPH-ACS COMPUTER GRAPHICS QUARTERLY"
2. Discounted membership and subscriptions to overseas computer graphics societies and publications.
3. Conferences, seminars, workshops and meetings (discounts to SIGGRAPH-ACS members).
4. Limited consultative assistance to SIGGRAPH-ACS members.
5. State of the Art reviews.
6. Review of computer graphics theses both nationally and overseas.
7. Contacts to computer graphics organisations locally and internationally


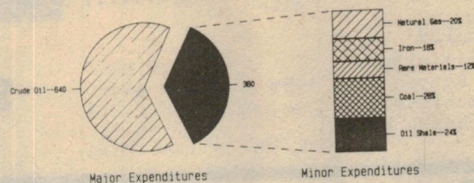


AIMS OF SIGGRAPH-ACS

1. To further computer graphics technology and expertise within Australasian industry.
2. To provide a forum for the dissemination of computer graphics algorithms, software techniques and software from within Australasia and overseas.
3. To promote the indigenous Australasian computer graphics industry and identify important policy issues in relation to this industry (software, firmware and hardware systems).
4. To investigate developments in graphics standards and promote implementations within the indigenous Australasian computer graphics industry.
5. To formulate ACS computer graphics research programmes.

SIGGRAPH-ACS


1. Promotes ACS research programmes and policy issues on computer graphics.
2. Maintains:
 - i) a computer graphics literature abstract service.
 - ii) a limited computer graphics library.
 - iii) a State of the Art audio visual collection.
 - iv) an index of public domain graphics software.
 - v) acts as a distributor and clearing house for overseas computer graphics groups.

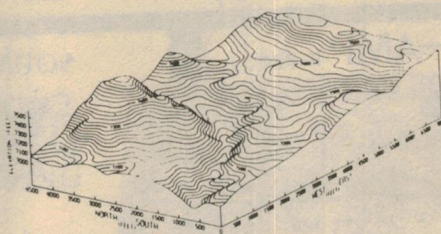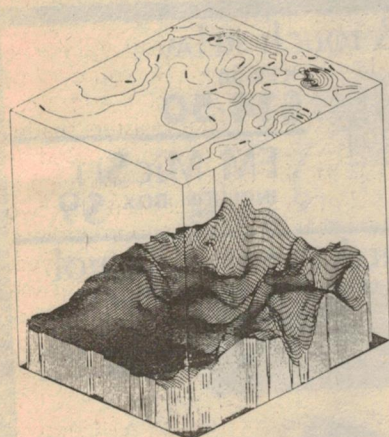

SIGGRAPH-ACS Editorial Reference

Please tick your interests:

1. Algorithms/Theses reviews
2. Public Domain Graphics Software
3. Proprietary Graphics Software Reviews
4. Drafting Systems
5. CAD/CAM
6. Medical Applications
7. Earth Resources Applications/Mapping, etc.
8. Education applications
9. Engineering applications
10. Scientific applications
11. Architectural applications
12. Business Graphics applications
13. Graphics Standards
14. State of the Art Reviews
15. Image Processing
16. Computer Vision (Robotics)
17. Computer Graphics Animation



SIGGRAPH-ACS APPLICATION FORM 1983

NAME:

ADDRESS:

POSTCODE: TELEPHONE:

COMPANY: POSITION:

ACS Affiliation:
Cut out this
page and
send to

The Secretary, SIGGRAPH-ACS.
P.O. Box N26, Grosvenor Street, SYDNEY NSW 2000.
Ph: (02) 267 5726. Telex: A.C.S. INC 73566.

Membership Fees:

(Monies payable
to
SIGGRAPH-ACS)

ACS Member	A\$25.00
Student (Full Time)	A\$15.00
Non-ACS Member	A\$38.00
Company/Organisation	A\$95.00

Australian Early-Bird discount of \$5.00 if paid by 15 January, 1983.

Students please indicate institution and student number.

Complimentary issue NOVEMBER '82 sent on receipt of application, plus 4 1983 issues.


ALL ENQUIRIES TO: SIGGRAPH-ACS Secretary.

..KITS..KITS..KITS..

Electronic Echo & Reverberation Amplifier

This ECHO EFFECT AMPLIFIER could create a sensational sound effect through the ECHO EFFECT, TIME DELAY and DEPTH CONTROL. Simply connect this unit to any existing hifi between the Pre-amp & Power-amp.

Kit includes all components, transformer, a professional finished cabinet & front panel as well as LED level display!!!!!!

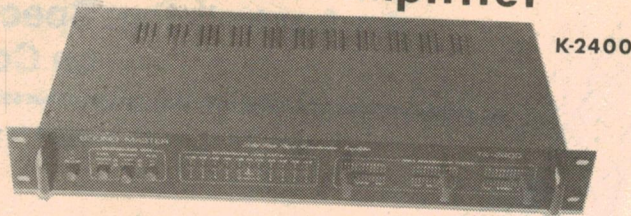

K-2400

SPECIFICATIONS:


Input Sensitivity 150mV/50K ohm
Frequency Response 10Hz to 50KHz ± 1 dB
Total Harmonic Distortion Less than 0.05%
Signal to Noise Ratio 90dB at 1V
Out Level 150mV/1K ohm (at 1KHz)

special at ★ \$190

A Stereo Pre-amp + Graphic Equaliser 2 IN 1

A great compact TWO IN ONE stereo Pre-amp saving the cost and space of extra cabinet & power supply. Accepts Phono, Tuner, Tape & Aux Input.

Kit includes all components, power supply, & a professional finished cabinet & knobs.

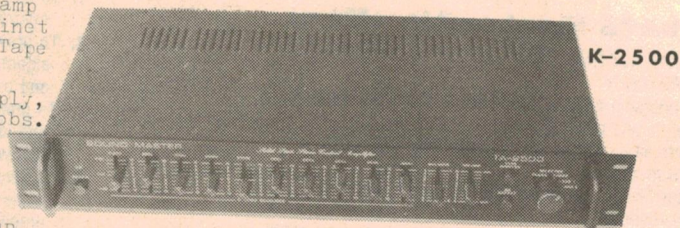

K-2500

SPECIFICATIONS:

Input Sensitivity Phono 2mV/47K
Others 130mV/50K
Frequency Response 10-100KHz ± 0.5 , -1 dB
Total Harmonic Distortion Less than 0.05%
Graphic Equalizer Control ± 12 dB/Octave


special at ★ \$179

A FAST SPEED PRE-AMP K-2800

A complete stereo Pre-amp plus TONE CONTROL using fast speed FET IC OP-AMP. & other quality components e.g. stepped volume control.

SPECIFICATIONS:

Input Phono 2.5mV/47K
Others 100mV/100K
THD 0.005% (rated output)
RIAA Equalisation ± 0.2 dB (20-20KHz)
Signal/Noise Phono 75dB
Others 90dB
Volume, Balance, Bass, Mid-range, Treble controls, Loudness & Tone Defeat provision.

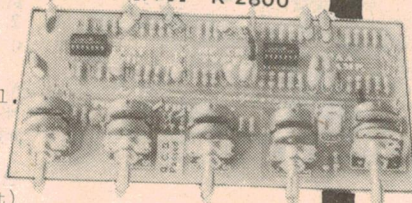

only \$40⁰⁰

\$89⁰⁰

80W x 2 DC AMPLIFIER KIT

A complete stereo Pre- & power Amplifier including 3 tone controls, heatsink, & power regulator all on a SINGLE Pcb. Require only a transformer with 28Vx2, AC 4A.

SPECIFICATIONS:

Freq. Resp. 0-100KHz, ± 3 dB
TID: Less than 0.01%
DC Supply ± 24 -40V, 3-5A
SPEAKER PROTECTION INCLUDED :



K-800

SOUND & TOUCH RELAY

KTY-38

\$14.50

FM Mic SET


INCLUDE BOX \$9

KTY-35

INFRA-RED REMOTE CONTROL

KTY-41

\$39⁰⁰

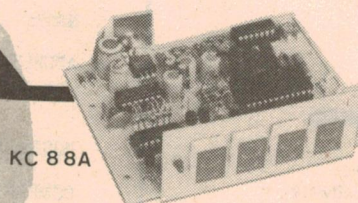

KC 88A

3 1/2 digit
measure 0-1mV to
200V Auto \pm sign

AUTORANGE DVM \$69⁰⁰
LW/AM/FM TUNER \$49⁰⁰

Hi-com Unitronics International Pty Ltd

Box 20 Post Office Sylvania N.S.W. PHONE (02) 575662

MAIL ORDER

ADD POST & PACK CHARGES

under \$25	\$ 3.0
\$25 - \$50	\$ 4.8
\$50 - \$100	\$ 6.0
OVER \$100	\$ 7.0

Please debit my Bankcard

Bankcard No. _____

Expired Day _____

Name _____

Signature _____



can be removed from DATUM and mounted remotely. The system should be organised so that power must be applied to undo the lock while removing the power will sound the alarm. Thus the system is secure should power to DATUM fail.

Pick up sticks

The final program is a game you may have played when younger. There is a pile of match sticks and the two players are allowed to remove in turn a number of matches (for example any number between 1 and 10), each player trying to force the other to pick up the last match. This simple game can be expressed in mathematical form and so this program, among other things, is to illustrate how DATUM can be programmed to perform simple arithmetic.

The easiest way to understand the winning strategy is to start from the end of the game and work backwards. If the maximum number of sticks that can be picked up by either player is M , then we wish to force things so that on our last move we leave a single match. Thus on our next to last move we leave $(M + 1) + 1$ matches, and on our third to last move $2(M + 1) + 1$.

Starting with N matches in the pile for our turn, we must therefore leave

$$L = A(M + 1) + 1$$

matches, where A is the largest positive integer and is given by

$$A = \text{integer} [(N-1)/(M+1)]$$

Thus for any move the player should remove

$$R = N - A(M + 1) - 1$$

A problem occurs if the operator knows this strategy and also applies it. When this happens R equals zero and a check for this must be made. In this case DATUM subtracts one match stick in the hope that it was by chance that this situation arose and on the next time around he will win.

To set up the game on DATUM the operator feeds in N , a two-digit number, being the number of matches in the pile and M , and a single digit number, the maximum number of matches a player can pick up per turn. The operator is given the privilege of having first go and so they feed in P , the number of matches they wish to remove. The program checks the value to see they are not cheating. In fact, "DATUM" takes a rather sadistic attitude in this program. If he wins he calls the operator a CLOT and if he loses he says the operator has cheated.

Fig. 3 presents one flow diagram for the game Pick Up Sticks and listing 3, shows the program. The only difficult programming steps in the flow diagram are the compute stages. Division is achieved by multiple subtraction and

Flowchart for Program 3

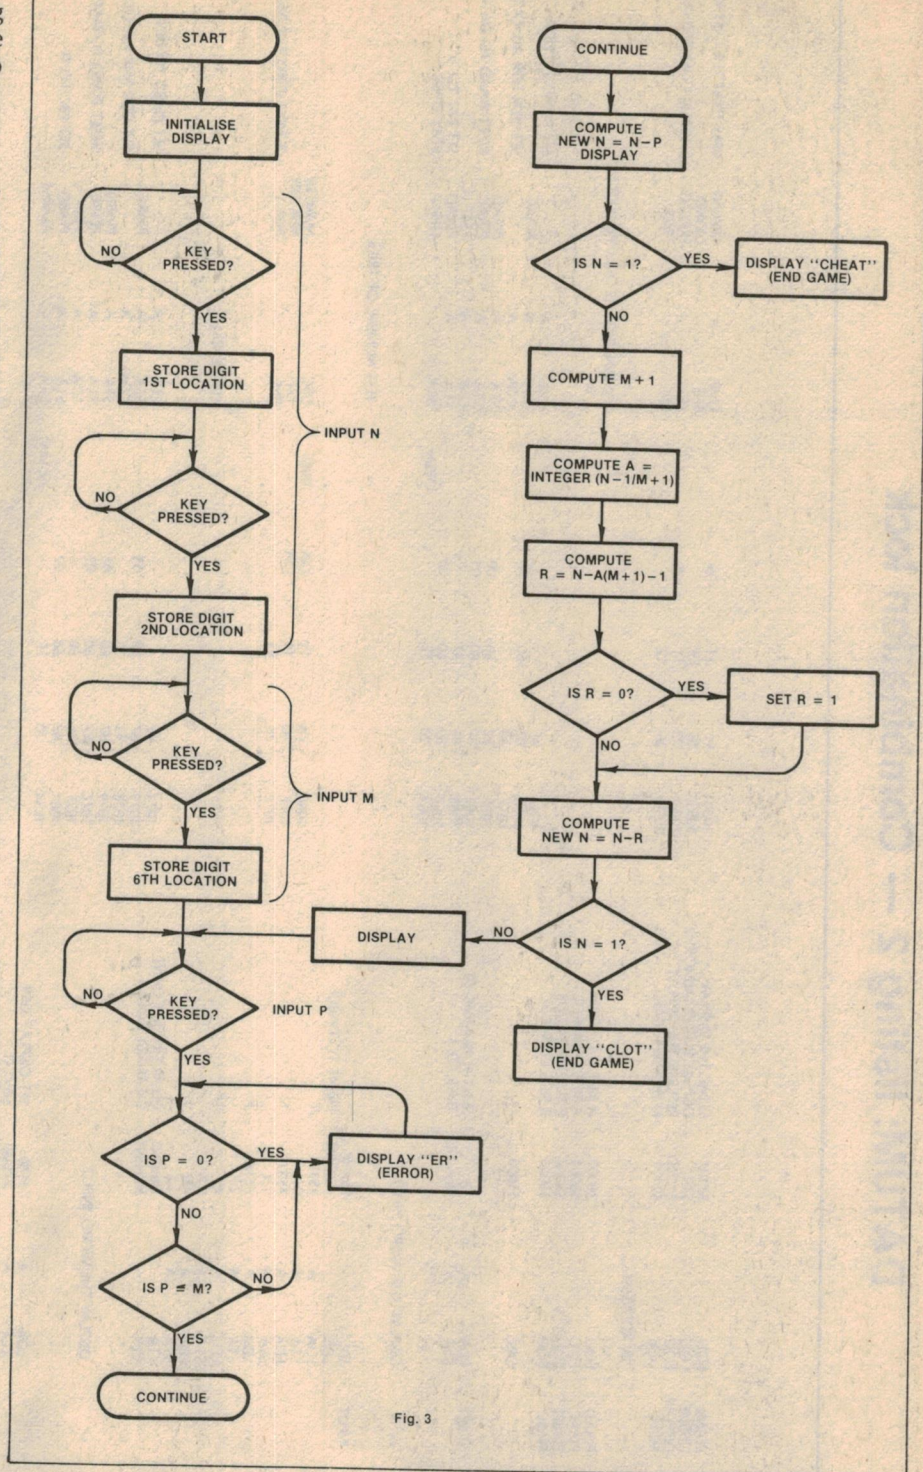


Fig. 3

multiplication by successive additions. The program as written has a number of defects and it is suggested that as an exercise you may try and make some changes. Firstly, the arithmetic is all done in hexadecimal and while this will provide practice for working out branch offsets, it would be more convenient to do this with decimal figures.

In addition to testing the input to restrict values from 0 to 9, decimal

arithmetic requires the use of the Decimal Adjust instruction to allow for overflow. This instruction only works in conjunction with the three addition instructions ABA, ADD and ADC, so for decimal subtraction the values must be converted to two's complement and then added.

The program as written does make use of FOUR additional monitor subroutines

Text continues on P95

DATUM: listing 2 — Combination lock

	7107 10010 71DD 7177		EQU EQU EQU NPK	\$7107 \$10 \$71DD \$7177	CLEAR THE DISPLAY DISPLAY BUFFER MEMORY REFRESH THE DISPLAY KEYBOARD SCAN	1050 1053 1055 1058	F1 26 7D 26	11 E3 11 12	09 08	CMP BNE TST BNE	B	KEYCNT GETKEY ERRCNT TRIES	WAS THAT THE LAST KEY? IS ERROR COUNT ZERO (MAX)
		**	PIA ADDRESSES							*	COMBINATION IS OK, OPEN LOCK		
	6000 6001 6002 6003 1000		EQU EQU EQU EQU ORG	\$6000 \$6001 \$6002 \$6003 \$1000	A SIDE DATA/DOR A SIDE CONTROL B SIDE DATA/DOR B SIDE CONTROL	105A 105B 105F 105E 1062 1065 1067 106A	4F B7 43 B7 B7 86 B7 20	60 60 60 47 60 60 FE	01 00 01 00	CLR STA COM STA STA LDA STA BRA	A A A A A A A	PIAAC PIAAD PIAAC #547 PIAAD OPEN	SET PIAAD TO DDR SET DDR FOR ALL OUTPUTS RESET PIAAD TO DATA SET PA7 TO '0' STAY OPEN
	1000 1002		LDA STA	3 NUMTRY	SET THE NUMBER OF TRIES TO 3					* **	OPEN		
		**	DISPLAY THE WORD INPUT							**	TEST NUMBER OF TRIES		
	1005 1008 100D 100F 1011 1013 1015 1017 1019 101B 101D 101F 1022		JSR LDX LDA STA LDA STA LDA STA LDA STA CLR CLR	#DISBUF \$51F 0.X \$591 1.X \$514 \$9 3.X \$SE 4.X ERRCNT KEYCNT	POINT TO DISBUF T N P U T CLEAR ERROR COUNT CLEAR KEY COUNT	106C 106F 1072	7A 7D 26	11 11 91	OA OA	DEC TST BNE		NUMTRY INPUT	IF NOT ZERO TRY AGAIN
		**	DISPLAY THE WORD INPUT							**	SET ALARM		
	1025 1027 102A 103D 1030		LDA STA JSR DEC BNE	\$580 XTMP DISPLAY XTMP DISOUT	SET DISPLAY TIME SAVE IT REFRESH THE DISPLAY DECREMENT DISPLAY TIME IS IT FINISHED?	1074 1075 1078 1079 107C 107F 1081 1C34	4F B7 43 B7 B7 86 B7 20	60 60 60 60 60 FE	03 02 03 02	CLR STA COM STA LDA LDA STA BRA	A A A A A A A	PIABC PIABD PIABC #560 PIABD ALARM	SET PIABD TO DDR SET DDR FOR ALL OUTPUTS RESET PIABD TO DATA SET PB7 TO '0'
		**	GET THE COMBINATION							**	TEMPORARY STORAGE		
	1032 1035 1038 103D 1040 1042 1047		LDX STX JSR BEQ LDX CMP BEQ INC	#COMBIN XTMPT NPKX GETKEY XTMPT 0.X MISERR ERRCNT NO GO TO NOTLIGHT XTMP KEYCNT	POINT TO COMBINATION SAVE THE POINTER SCAN KEYS/RECORD HAS A KEY BEEN PRESSED? POINT TO COMB. STORE WAS IT AN ERROR? YES	1100 1100 1008 1109 110A 110B				ORG RMB RMB RMB RMB RMB		\$1100 8 1 1 2	THE COMBINATION SHOULD BE STORED HERE ERROR COUNT KEY COUNT NUMBER OF TRIES TEMP STORE
	1048 104B		STX INC		SAVE POINTER					*			
		**	CHECK KEY COUNT							*			
	104E		LDA							*			

This program can be used as a guessing game or as the basis for a security lock system. An 8-bit code is stored in memory before the program is run. The user has three chances to enter the correct code before an alarm connected to PLAI bit DB7 is activated. All programs shown are entered in memory beginning at location 1000 (hex). Code before this address are "equates" which define the location of routines and storage used by the program, and should not be entered.

This program can be used as a guessing game or as the basis for a security lock system. An 8-bit code is stored in memory before the program is run. The user has three chances to enter the correct code before an alarm connected to PIA1 bit DB7 is activated. All programs shown are entered in memory beginning at location 1000 (hex). Code before this address are "equates" which define the location of routines and storage used by the program, and should not be entered.

DATUM: listing 3 — Pick up sticks


[illegible]

This program simulates the game of "Pick up sticks" or "Matches". The winner is the player (either DATUM or the operator) who forces the opponent take the last object.

FANTASTIC

A TV GAME WITH INBUILT PERSONAL COMPUTER!

OVER
5000
SOLD!

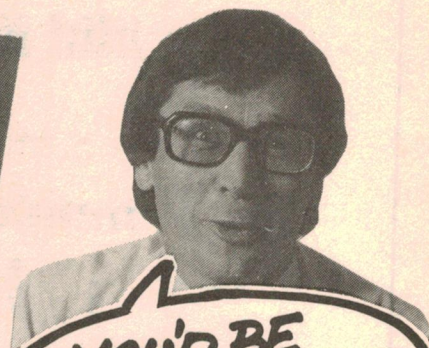


YOU'D BE
CRAZY TO BUY
JUST A TV
GAME!

& it's years ahead!

Yes — an absolutely up-to-date design. Most of the TV game consoles around were designed at least 2 years ago. And in electronics, that's an eternity!

Compare the quality

Amazing picture quality with over 49,000 dots — over twice as good as the largest selling TV game. You'll be amazed at the clarity, the detail — just like the screens NASA use in the space shuttle!



Space age Controllers




GREAT FEATURES —
GREAT PRICE!

Not just simple sticks: full space-age guiding devices with 48 keys as well. You get incredible control capability — far more than possible with other games. And slide-in overlays for controllers: you can see exactly what to do! When the controllers are placed in the console, they form a standard typewriter-style "QWERTY" keyboard — that's versatility!

Fantastic game Cartridges


21st century games — like you've never played before. And every cartridge has many games — up to 32 in each! You'll never be satisfied with anything less after playing the WIZZARD. Every cartridge has a built-in demonstration program to show you how to play the game. And plays music, too — it's that advanced!

TWO NEW GAMES!



Mouse Puzzle

Wow! What a game... the mouse's life is in your hands. He wanders around a maze, looking for food — you have to move the maze around to give him somewhere to go. And the City Kitty is on the prowl, looking for your mouse! 8 different games to choose from. Cat Y-1680 \$39.95



Astro Pinball

All the fun of the pinball parlour. The ball bounces off the bumpers at realistic speeds; the flippers are just like the real thing — and you can even score a free ball! Play up to four players at a time, fast or slow. Cat Y-1612 \$39.95

Compare the price

The best part of all: the Dick Smith WIZZARD is around \$200 cheaper than the closest comparable computer! Yes, you not only save a fortune by buying the Dick Smith WIZZARD — you get much greater flexibility and enjoyment!



FREE
GAME CARTRIDGE
WORTH
\$39.95

SUPPLIED
WITH
WIZZARD

7 Day Trial Offer

if you're not completely happy, you can return the WIZZARD within 7 days in original condition and packing for a full refund! You owe nothing — not even an explanation. So why not try the WIZZARD, today!

DICK SMITH Electronics

See pages 5-6
for address details

The one with the inbuilt personal computer

The Dick Smith WIZZARD has an inbuilt personal computer facility! Just plug in the optional 'BASIC' cartridge and the WIZZARD becomes a powerful personal computer, complete with 17K of memory (that's more than you get with many personal computers! Learn how to run your own programs. Finance, home-work, anything!



Cat. Y-1605 \$69.50 'BASIC' CARTRIDGE
Now Available

DICK SMITH WIZZARD
ONLY \$295
Cat. Y-1600

\$6.85 weekly over 12 mths
to approved customers

Great range of cartridges!

Tank Attack	Cat. Y-1610	\$39.95
Astro Pinball	Cat. Y-1612	\$39.95
Wimbledon Tennis	Cat. Y-1620	\$39.95
Auto Chase	Cat. Y-1630	\$39.95
Crazy Chicky	Cat. Y-1640	\$39.95
Planet Defender	Cat. Y-1650	\$39.95
Air/Sea Attack	Cat. Y-1660	\$39.95
Mouse Puzzle	Cat. Y-1680	\$39.95

DSE/A409/LM



Mail Order Centre: PO Box 321, North Ryde 2113
Phone: (02) 888 3200

\$50,000 IN PRIZES TO BE WON. SEE YOUR NEAREST DICK SMITH STORE.

Table 1: DATUM Monitor routines

NAME	START LOCATION	COMMENTS
SPROMPT	7107	Puts a "PROMPT" in the left-most digit and blanks the rest.
DISKEY	715E	Refreshes the display then scans the keyboard. If no key was pressed then the routine loops back to display refresh routine.
MPXK	7177	Tests whether a key has been depressed. Acc B = 0 if no key depressed else # 0. Acc A has value of key. Index Reg is used.
TIMLP	71D2	Gives a 10ms delay and does not change Acc A, Acc B or Index Reg.
XTIMLP	71D7	Time delay depends on the Index Reg. Delay = Index Reg contents x 8 μ S.
DISPLAY	71DD	Displays for 10msec contents of display locations 0010—0015. Index Reg used.
BYTE	724D	Takes two nibbles in successive memory locations (indexed) and combines to form a byte. MSN in location 00 and LSN location 01. Index Register must be set before entering subroutine. Result in Acc.
TWODIG	726E	Takes byte in Acc A and splits into 2 nibbles MSN in Acc B, LSN in Acc A Index Register.
BIN7SEG	727D	Converts a hex value in Acc A, into a segment code. This result is in Acc A, the original hex value being lost. Index Reg is left unchanged.
ADBX	734C	Adds the contents of Acc B to the Index Reg and the result is in the Index Reg on exit from the routine.
SBBX	7364	Is similar to ADBX but subtracts Acc B from the Index Register.

Table 2: Addresses of PIA 1 (hex).

6000	Data register A and Data Direction register A
6001	Control register A
6002	Data register B and Data Direction register B
6003	Control register B

Table 1 shows Monitor routines which can be used with any program. Table 2 has the addresses of PIA 1 of DATUM.

namely DISKEY, BYTE, TWODIG and BINTSEG. The function of each of these is explained in Table 1. Please note that MSN stands for most significant nibble and LSN for least significant nibble.

Concluding remarks

The above three programs illustrate some of the many applications of DATUM, and we hope that you have enjoyed studying and using them. The applications and usefulness of DATUM can be extended by adding the other two integrated circuits (the ACIA and PIA2), but even more, by adding the matching extension board. This board can be expanded according to user needs, and provides for memory to be increased up to 12k bytes (RAM and/or EPROM), analog to digital and digital to analog conversion, cassette interface and use with a terminal.

DATUM was originated by Malcolm Haskard, Senior Lecturer at the School of Electronic Engineering of The South

Australian Institute of Technology, who designed the circuit and wrote the documentation. John Duval, a technician with the School was responsible for the artwork, including the printed circuit patterns used by Gammatron to produce the boards. As mentioned in the first article, Peter O'Neill, a masters degree student, wrote the DATUM monitor program.

Complete kits and instructions for building the DATUM microprocessor board are available from Gammatron, Unit 1, Weens Rd, Pooraka, SA, 5095. Phone (08) 262 6555.

Correction

The connection diagram for the DATUM expansion interface, Fig. 8, published in November 1982, is partially incorrect. On the upper side of the board, starting from pin 11, the address lines are in the sequence A0, A1, A2, A3, A7, A4, A8, A5, A9, A6, A10, and A11 (on pin 22).




BASIC ELECTRONICS is almost certainly the most widely used manual on electronic fundamentals in Australia. It is used by radio clubs, in secondary schools and colleges, and in WIA youth radio clubs. Begins with the electron, introduces and explains components and circuit concepts, and progresses through radio, audio techniques, servicing, test instruments, etc. If you've always wanted to become involved in electronics, but have been scared off by the mysteries involved, let basic Electronics explain them to you.

Available from "Electronics Australia", 57 Regent St, Chippendale, NSW. **PRICE \$3.50** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2000. **PRICE \$4.40.**

AN INTRODUCTION TO DIGITAL ELECTRONICS FOURTH EDITION

Electronic equipment now plays an important role in almost every field of human endeavour. And every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and An Introduction to Digital Electronics can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolutions is all about. The fourth edition has been updated and expanded,

to make it of even greater value.



ONLY \$4.50 + 90c p&p

Available from "Electronics Australia", 57 Regent St, Chippendale. **PRICE \$4.50** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. **PRICE \$5.40.**



Letters to the editor

Companies — perhaps modesty is justified

In your November issue your editorial led with the words "There is no need to be modest". On the contrary, I feel that in some areas of the Australian electronics industry there is need for a lot more reticence. Far be it for me to speak of the purveyors or creators of high technology produce. What is needed is quality control and responsibility at the nitty-gritty level.

Two days ago the phantom statistician struck at my house and two light bulbs blew. I subsequently purchased three bulbs (60 and 75W, reputable maker) of which one failed to work at all and the other died at switch on. Things were looking dim!

I purchased two more bulbs (60W, different although equally reputable make). While inserting the first I noticed that it rattled a good deal more than is usual. On inspection, the centre of the base proved to contain sufficient loose solder to enable a short circuit. The second bulb proved to be in the same condition. Not wishing to blow fuses I inserted the last of the original three bulbs.

It has lasted long enough to write this

letter, though I can't help feeling for those with less than acute hearing or electrical knowledge amongst us who must have many blown fuses and frayed tempers. All in all, one out of five is not a good score.

It is hard to see (!) such companies being viable, let alone visible, in the market place for very long.

O. Reynolds,
Balgowlah, NSW.

COMMENT: We agree that one out of five is a poor score. We hope you returned the defective bulbs for a refund. One reason why companies become slack is that their customers allow them.

Weather Bureau likes Towards 2000

In your editorial for October 1982, you label the television series, "Towards 2000" as being an example of an ABC show put together by people "who could not care less". Further, you describe "Towards 2000" as having "in-different presentation".

You are perfectly entitled to your own

viewpoint, but I should point out to you that what you say is entirely without substance.

Indeed, "Towards 2000" is produced by one of the most professional and enthusiastic teams with whom it has ever been my privilege to work. The dedication to the series of the reporters, directors, film crews, researchers, producer's assistants and indeed the whole team of "Towards 2000" is, without question, total and unflagging.

The audience response to the two series to date has been overwhelming. For instance, the most recent TV Audience Appreciation Survey conducted in Melbourne shows "Towards 2000" as having an appreciation factor of 85% (ie, 85% of its viewers either "enjoyed" or "liked" the program). With the exception of the ABC's Commonwealth Games coverage (93% appreciation), no other program on any station equalled "Towards 2000's" appreciation rating.

As I write, a letter from Victoria's Bureau of Meteorology has arrived on my desk. The opening paragraph reads —

"I would first of all like to congratulate you on the high standard of your show. The technical quality and fresh approach to new advances are needed for our society to adjust to the future."

Like I say, your editorial writer is perfectly entitled to his viewpoint. It's just a pity that view is so far removed from reality.

L. Capps,
Executive Producer,
"Towards 2000",
Australian Broadcasting Commission,
Sydney, NSW.

Electronics is going digital. This book can help YOU go right along with it: **AN INTRODUCTION TO DIGITAL ELECTRONICS**

Here are the chapter headings:

- | | |
|--------------------------------|------------------------------|
| 1. Signals, circuits and logic | 12. Basic readout devices |
| 2. Basic logic elements | 13. Multiplexing |
| 3. Logic circuit "families" | 14. Binary arithmetic |
| 4. Logic convention and laws | 15. Arithmetic circuits |
| 5. Logic design: theory | 16. Timing & Control |
| 6. Logic design: practice | 17. Memory: RAMs |
| 7. Numbers, data & codes | 18. ROMs & PROMs |
| 8. The flipflop family | 19. CCD's & magnetic bubbles |
| 9. Flipflops in registers | 20. D-to-A converters |
| 10. Flipflops in counters | 21. A-to-D converters |
| 11. Encoding and decoding | Glossary of terms |

Available from "Electronics Australia", 57 Regent St, Chippendale. **PRICE \$4.50** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. **PRICE \$5.40.**


Metrics: advertisers should take more care

No doubt many of us had a good chuckle at Dick Smith's "Exclusive" — new for 82" autoranging digital multimeter which is advertised on page 54 of his 1982/83 Electronic Enthusiast's Catalogue (Cat Q-1446) — and which weighs 250kg (well that is what he said!).

However, Jaycar Pty Ltd were not content to let the matter rest at that. In the June 1982 issue of EA (page 17). Jaycar advertise their version of the same meter as one thousandth the weight of Dick's (cheaper too).

All good light-hearted stuff perhaps. But it shouldn't happen. Not in technical publications. Maybe John Citizen is still suffering withdrawal symptoms following the abandonment of the imperial system, but electronics buffs should be familiar with the metric system from way back, I learnt it in secondary school 25 years ago. Didn't you city slickers have a go at it too?

For further examples of shoddy use of

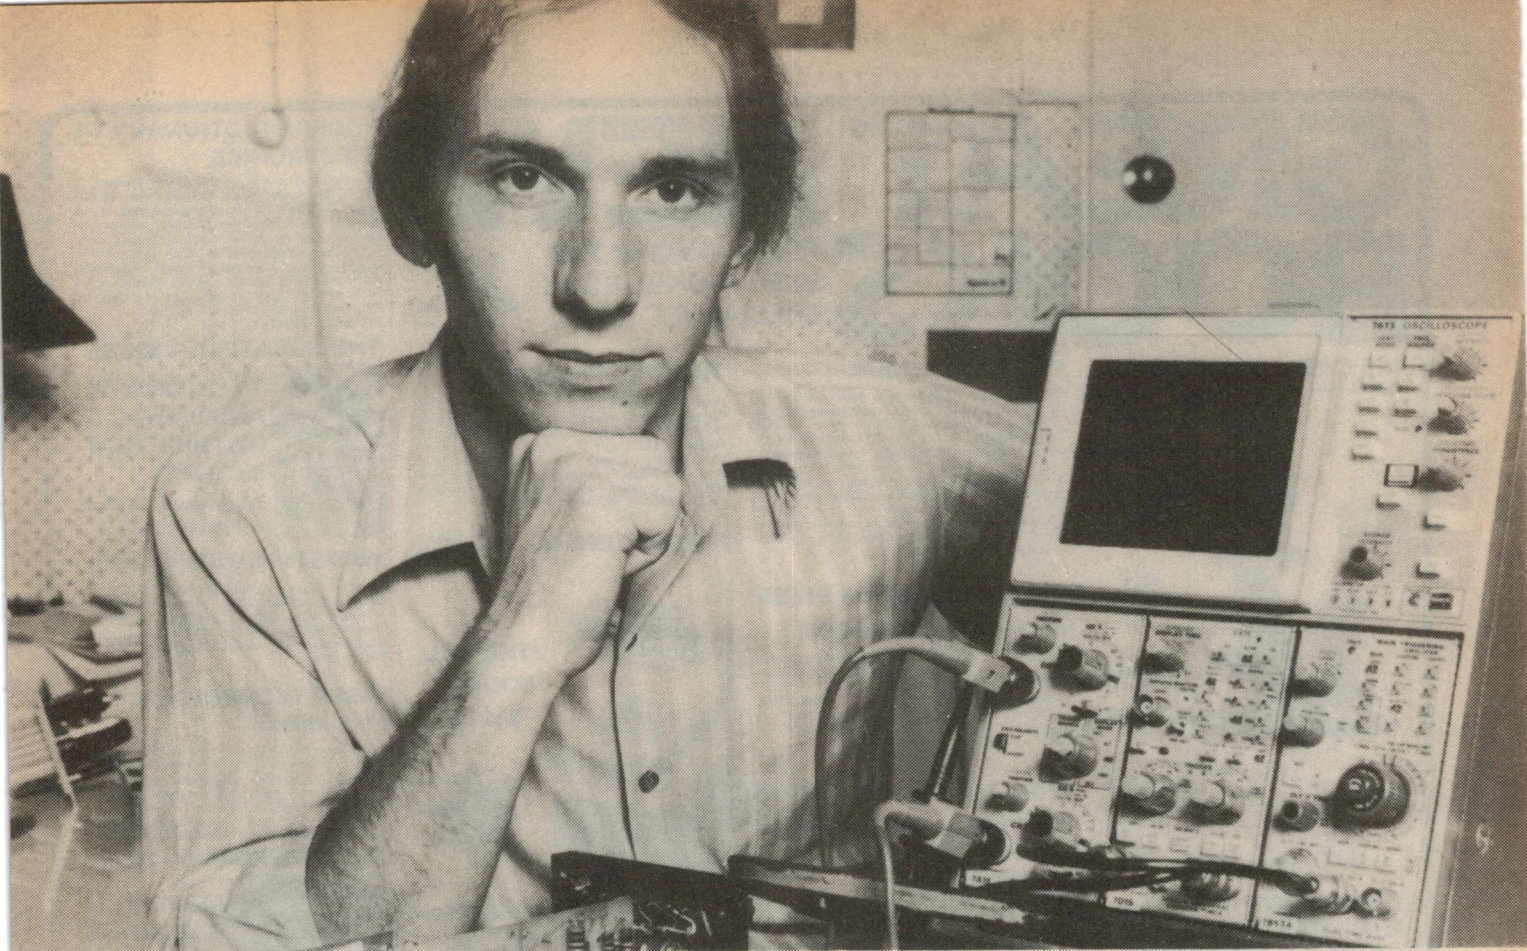

"ICS gave me the break I needed."

— 23-year-old Greg Marr. ICS Student.

"I applied for over 30 jobs in the computer industry but kept getting knocked back.

There were plenty of jobs about; it was just that there were always people with more qualifications than me.

That's when I decided to apply for an ICS course."

"It was as if I was the only ICS student."

"The ICS program quickly gave me an understanding of the job I wanted. I studied at my own pace and the tutor really helped a lot.

Unlike a classroom where the tutor deals with up to 40 people at a time, your ICS tutor gets to know you personally. If you work at a slower or faster rate, you won't be penalised because the class is ahead or behind you.

ICS doesn't just send you text books, you receive a complete learning system.

Each program is accompanied by notes and questions that allow you to understand and remember every point . . . before moving onto the next one."

What you put in. What you get out.

You'll have to put aside a couple of hours a day. But with ICS you can pick and choose just when and where you study.

You have to take assignments and tests. But your ICS tutor will guide you and give you advice every step of the way.

It may take time. But in the end you'll emerge with extra skills that may help you pick and choose jobs, ask for more money or set your own conditions.

"I got the job I wanted."

After a few months of study and a

couple of exams, Greg Marr used his ICS experience to apply for another job. Today he is a computer technician.

He is just one of 9 million people around the world who have proven the success of ICS.

If you'd like to join them, apply now for enrolment to one of the ICS Career Programs listed below.

By return mail you will receive complete details of courses, fees and the unique ICS study method.

Choose the ICS course which interests you most

Send now for details and an enrolment application.

- Automotive
- Building Sciences
- Drafting
- Electronics
- Mechanical Engineering
- Electrical Engineering
- Civil Engineering

- Refrigeration and Air Conditioning
- TV Servicing
- Accountancy
- Business Management
- Sales and Marketing
- Computer Programming
- Hotel Motel Management

- Secretarial/English
- Art
- Writing
- Dressmaking
- Interior Decorating
- Guitar
- Photography

The course I am most interested in is _____

(If the subject you want is not listed above, please write it in)

Please send me without cost or obligation the ICS Careers Information Guide which tells me everything I need to know about the course I wish to receive information on.

Mr/Mrs/Miss _____ (Please Print)

Address _____ postcode _____

Occupation _____ Age _____ Phone _____

International Correspondence Schools

Tick here if currently full time student ☐

Sydney: 400 Pacific Highway, Crows Nest, NSW 2065. Tel: (02) 43 2121

Melbourne: 18-20 Collins Street, Melbourne, VIC. 3000. Tel: (03) 656 1950

Brisbane: 131 Elizabeth Street, Brisbane, QLD, 4000. Tel: (07) 221 0178

Adelaide: 28 Grenfell Street, Adelaide, S.A. 5000. Tel: (08) 219 4154

Perth: P.O. Box D157, Perth, W.A. 6001. Tel: (09) 321 8530

New Zealand: 182 Wakefield Street, Wellington C.I. N.Z.


0461

ICS

GREAT NEW BOOKS

FROM JAYCAR THE ELECTRONIC BOOK SPECIALIST.....

THE CHEAP VIDEO BOOK

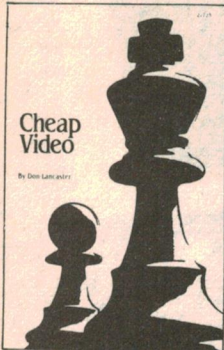


ONLY \$10.95

Complete discussion of a new, low-cost way to get words, pictures, and opcodes out of your computer and onto any ordinary TV set. Don Lancaster outlines an easy to build, seven-IC circuit which you can build for less than \$20. This circuit can be software controlled to provide any alphanumeric or graphics format including high resolution (256x256) and four colour mode. By Don Lancaster, 256 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21524

EXPERIMENTS IN ARTIFICIAL INTELLIGENCE FOR SMALL COMPUTERS

Conduct interesting and exciting experiments in artificial intelligence with this book, a small computer with extended BASIC, and some knowledge of the BASIC language. The author first introduces you to artificial intelligence — the capability of a device to perform functions normally associated with human intelligence, such as playing, problem solving, reasoning, creativity, and verbal communications. Then game-playing programs, with a checkers-playing game as the main topic, are explained. By John Krutch, 112 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21785

THE BEST FOR \$11.95



ACTIVE FILTER COOKBOOK
GREAT READING — \$19.95

A practical, easy to read discussion of the many types and uses of active filters by popular author Don Lancaster. Learn how to construct filters of all types, including high pass, low pass, and band pass having Bessel, Chebyshev, or Butterworth response characteristics. Easy to understand — no advanced math or obscure theory is used. Active Filter Cookbook can be used as an introduction to active filter circuits or as a reference book for analysis and synthesis techniques for active filter specialists. By Don Lancaster, 240 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21168

DESIGN OF ACTIVE FILTERS WITH EXPERIMENTS

An introduction to the implementation and design of active filter circuits that use the popular 741 op-amp chip. The emphasis is on the use of active filters and their design, without complex maths. Twenty six detailed experiments and many practical examples. By Howard M. Berlin, 240 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21539

FOR THE SHELF — \$14.95

CMOS COOKBOOK

One of the best selling technical books on the market, this cookbook gives you a solid understanding of CMOS technology and its application to real world circuitry. The author explains how CMOS differs from other MOS designs, how it is powered and what its advantages are over other constructions. A mini-catalogue is included which lists over 100 devices, giving their pinouts and application notes. The final chapter shows you how to put all the previous information together to construct a number of large scale, working instruments. By Don Lancaster, 416 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21398

GET COOKING FOR \$17.95

IC OP-AMP COOKBOOK

An informal, easy to read guide covering basic op-amp theory in detail, with 200 practical, illustrated circuit applications to reflect the latest technology. JFET and MOSFET units in both single and multiple formats are featured. Includes manufacturers' data sheets and lists addresses of the companies whose products are featured. By Walter G. Jung, 480 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21695

GREAT BOOK ONLY \$21.95

555 TIMER APPLICATIONS SOURCEBOOK WITH EXPERIMENTS

Describes the construction and use of the 555 timer and gives you numerous, practical examples of its applications in all areas of electrical and computer engineering. Seventeen simple experiments are provided to give you working knowledge. By Howard M. Berlin, 160 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21538

LATE NIGHT READING \$9.95

DESIGN OF OP-AMP CIRCUITS WITH EXPERIMENTS

A series of 35 experiments illustrates the design and operation of linear amplifiers, differentiators and integrators, voltage and current converters, active filters and lots more. By Howard M. Berlin, 224 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21537

EXPERIMENT FOR \$14.95



REGULATED POWER SUPPLIES (3rd Edition)

'THE' BOOK ONLY \$25.95

The newest, most comprehensive discussion of internal architecture and operation of the latest solid state regulators. Thoroughly explains when regulated supplies are needed and how to incorporate them into your design projects. Discusses modern, practical circuitry including linear and switching circuits and late ICs. By Irving M. Gottlieb, 424 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21808

ELECTRONIC MUSIC CIRCUITS

Written for the computer and electronics hobbyist with an interest in music, as well as musicians and studio engineers. The author describes how to build a custom electronic music synthesizer, outlines numerous other circuit designs, and then shows you how to modify them to achieve particular responses. Many of the circuits can be used as special effects boxes for guitars and other musical instruments. Approx. 288 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21833

FOR 'MUSO's' — \$23.95

RF CIRCUIT DESIGN

A user-oriented text with a practical approach to the design of RF amplifiers, impedance matching networks, and filters. Can be used in cookbook fashion as a catalogue of useful circuits with component values. Utilizes a minimum of complex math. A valuable bridge between the classroom and 'real world' application, and an excellent reference manual. Approx. 352 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21868

FOR DESIGNERS — \$25.95



'THE' PLL BOOK — \$14.95

DESIGN OF PHASE-LOCKED LOOP Cts WITH EXPERIMENTS

An excellent introduction to the theory, design, and implementation of Phase-Locked Loop circuits using various TTL and CMOS devices. Useful self study course for the experimenter and for inclusion in college courses on control systems or linear ICs. Includes manufacturers' data sheets and describes the use of breadboarding aids in the wide range of laboratory type experiments. 256 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21545

DESIGN OF VMOS Cts WITH EXPERIMENTS

VMOS technology easily surpasses the BJT, FET, and CMOS circuitry in its mimicry of the ideal active circuit element. The authors provide an in-depth look at the technology which makes dramatic advances possible, and show how these components can easily and effectively be integrated into common circuit designs to enhance their responses. 176 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21686

THE LATEST — \$16.95

HOW TO READ SCHEMATIC DIAGRAMS (3rd Edition)

Learn to successfully read schematics — the roadmaps of electronic circuits. Defines many of the newer symbols including logic gates and provides up-to-date definitions of many electronic symbols. Author Herrington shows you how various components are combined to form circuits, and takes you step by step through a schematic for a radio receiver. 192 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21127

GREAT VALUE — \$9.95

MODERN DICTIONARY OF ELECTRONICS

Join the millions who use this superb reference to the world of electronics. Contains over 20,000 terms, including the latest language used in the fields of communications, reliability, semiconductors, medical electronics, microelectronics, fibre-optics, and computers. For quick and easy reference, separate coverage of schematic symbols, the International System of Units (metric) and a table of the Greek alphabet are provided. By Rudolf F. Graf, 832 pages, 5 1/2 x 8 1/2, hard. Ask for No. 21314

THE GREATEST — \$29.95



TV ANTENNAS AND SIGNAL DISTRIBUTION SYSTEMS

As reviewed in Sept. EA page 107

WAS \$14.75 NOW \$12.50

An aid in selection and installation of TV antennas and signal distribution systems, and how to implement these systems for high quality TV reception. Includes valuable performance data based on actual measurements made by the author. 256 pages, 5 1/2 x 8 1/2, soft.

LASER TECHNOLOGY (2nd Edition)

Update laser technology from a practical standpoint. Discover applied laser principles, laser holography, and beam capabilities and energies. Other chapters explain laser communications systems, laser systems for the military, and instrumentation in medical surgery and dentistry. 288 pages, 5 1/2 x 8 1/2, hard. Ask for No. 21588

BE A LASER MAN — \$21.95



MODERN RECORDING TECHNIQUES

FOR THE HI FI MAN \$17.95

Explains the equipment, controls and techniques found in the modern recording studio and how to use them creatively as well as properly to produce desired results. Numerous photographs, diagrams, and charts. 368 pages, 5 1/2 x 8 1/2, soft. Ask for No. 21037

73 DIPOLE AND LONG-WIRE ANTENNAS

Experiment with one or more of 73 different wire antennas — from dipole to rhombic. By Edward M. Noll, W3FQJ, 160 pages, 5 1/2 x 8 1/2, soft. Ask for No. 24006

GOOD READING — \$9.95

CMOS DATA '82 FROM NATIONAL ONLY \$8.95 SEMICONDUCTORS

Complete data on National 4000 and 74C series CMOS as well as the CMOS LSI devices produced by N.S. Size: 170w x 230h x 60d.

Jaycar NUMBER 1 FOR KITS

125 York Street, Sydney 2000
Phone: 264 6688 Telex: 72293

"Nevilles Corner"
Cnr. Carlingford & Pennant Hills Road,
Carlingford

Phone: 872 4422

Mail Orders To: Box K-39 Haymarket
Sydney 2000

POST AND PACKING CHARGES
\$5-\$9.99 (\$1.20) \$10-\$24.99 (\$2.40)
\$25-\$49.99 (\$3.50) \$50-\$99.99 (\$4.60)
\$100 up (\$6.20)

NEW SHOP HOURS
Mon-Fri 8.30 to 5.30pm
Sat 8.30 to 12.00pm
Thurs night to 8.30pm

MAIL ORDER BY
BANKCARD VIA
YOUR PHONE



YOU CAN PHONE CARLINGFORD ON 872 4444 AS WELL!

metric units, look no farther than the 1982/83 Altronics catalogue which featured as a supplement to EA back in March. At least they tell you (page 20) that UF is microfarad and PF is picofarad — but why didn't they use the correct abbreviations μF and pF ? One page 18, however, they leave it to the reader to decipher the values associated with fuses and cradle relays, which makes the game more interesting!

Perhaps we can forgive the wheelies their "kph" and other confused terms; and the fishermen whose "3lb bream" become 1.36kg in magazines with spurious accuracy; but technical people should do better than that.

I. B. Staples,
Mareeba, Qld.

Problems with VCR signal distribution

I would be obliged if you would draw your readers' attention to a possible problem with reference to my article on TV Distribution in the November issue. In discussions with colleagues at the recent TETIA-TESA Convention in Melbourne, it was brought to my attention that the suggested system (of incorporating VCR signals) may not work with certain VCRs. In particular, those Beta machines without an antenna switch could cause intermodulation, patterning or colour subcarrier cancellation.

I have not had the opportunity to investigate this problem, nor to devise an answer where the problem does exist. I can only apologise to any reader inconvenienced by this omission, and would be pleased to hear from anyone who has met and overcome this particular problem.

J. Lawler,
Geilston Bay, Tas.

Farads are a reality

Upon seeing the cartoon on page 69 of your September issue, I thought you might appreciate the enclosed device (a capacitor of about 25mm in height and 12mm in diameter — about the size of a 16V/470 μF electrolytic — Ed). It is possible you have already seen one as it is out of a JVC HR2200 portable VCR.

If you haven't, I can assure you it is not a joke. That is a real 3.3 Farad 1.6V capacitor! It serves as a power supply back up for the LCD tape counter (being much more successful than a Ni-Cad battery in this application). It is not an electrolytic and has no indication of polarity. It can be charged in either direction.

It has a fairly high internal resistance, but will still run a small motor. One particular motor out of a camera zoom unit ran for about four minutes! Even more surprising was that by spinning the

Misconceptions in article on Amplitude Modulation

I would like to comment on the article on "Amplitude Modulation: The Basic Concepts", submitted by Elmo V. Jansz in your October 1982 issue.

The author described AM theory the same way it was taught to myself and many other persons involved in electronics and communications. However, the way it has been theorised by the author and countless other people introduces misconceptions into the understanding of AM.

It has been said that the amplitude of the carrier varies in accordance with the amplitude of the audio signal. This is not so. Regardless of percentage modulation the carrier signal will always remain at a constant amplitude.

What does occur is that the amplitude of the sidebands vary with the amplitude of the modulating signal, also the frequency of the sidebands vary with the frequency of the modulating signal.

Therefore it can be stated that with a constant amplitude and frequency of an audio signal the amplitude and frequency of the sidebands will remain constant. In the resultant transmitted AM signal there are three components present:

1. The carrier frequency.
2. Lower sideband frequency.
3. Upper sideband frequency.

When an AM signal is viewed on an oscilloscope it appears as if the carrier signal is varying in amplitude. The reason this occurs is because the oscilloscope receives three different frequencies and algebraically adds them together.

This result can also be done graphically on paper by adding the amplitudes of the three AM components together.

Further insight and understanding of AM can be achieved by displaying an AM signal on a spectrum analyser.

This may be difficult to achieve because spectrum analysers are expensive and therefore somewhat scarce.

Having described amplitude modulation, it must follow that amplitude demodulation or detection must be described.

It is often taught that the AM detector diode rectifies the AM signal and the capacitor in circuit after the diode fills in the gaps between the carrier peaks to reconstruct the audio.

This is also a misconception. It has been established that the AM signal arriving at the detector consists of three separate frequencies. By using the detection method previously mentioned the three RF components would be rectified then shunted to earth by the filter capacitor. There would be no audio output from the detector.

It is apparent that a suitable explanation of AM detection is necessary. To reconstruct audio from an AM signal the sidebands must be mixed with the carrier signal.

Regardless of the amount of frequency conversion that occurs in the receiver the difference frequency between sidebands and carrier will always remain the same as the transmitted signal.

In AM detection, mixing occurs between the sidebands and the carrier signal. This mixing occurs in the non-linear characteristic of the detector diode.

The capacitor shunts RF to earth leaving just the audio to be amplified. It should be noted that some mixing would occur between the sidebands producing a product of twice the modulating frequency. This would be likened to harmonic distortion.

D. Dutton,
Alpha Electronics,
Toowoomba, Qld.



motor (by rapidly running the attached pulley across the table top a few times) the capacitor could be charged. The motor will then faithfully run in the same direction.

It ran a small 1.5V radio for about 90 seconds at a listenable volume, but the local oscillator stopped at about 1V. If not for this, it would no doubt have operated much longer. We have no information about the company who

manufactures the device, the only identification being the title "Gold Cap" printed on the plastic sleeving.

I can recall reading in your magazine some years ago that capacitors of this size could be made with a new process, but the last I heard was that they were limited to a rating of about 0.5V working. Another of our VCR's has one of these capacitors with a rating of 5.6V.


K. Walters,
Auckland, NZ.

Comment: "Gold Caps" are apparently being increasingly used for standby power supply for memory devices in Japanese synthesiser AM/FM tuners and VCRs. Thank you for the sample. It is a fascinating component.



Books & Literature

RF circuit design

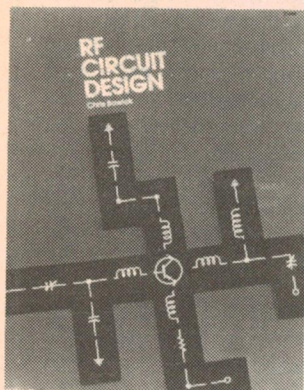

RF CIRCUIT DESIGN by Chris Bowick. Published 1982 by Howard W. Sams, Indianapolis, USA. Soft covers, 215 x 279mm, 176 pages. Illustrated with many circuits and diagrams. ISBN 0 672 21868 2. Price \$33.95.

Nowadays, when publishing in the electronics field seems to be dominated by books on computers and programming, it is a welcome change to come across a text on RF circuit design. Such books are all too rare. Having indicated that the book is welcome it is good to be able to state that it is also well written.

There are seven chapters in all, plus three appendices. Chapter one starts with components and discusses wire, resistors, capacitors, inductors, toroids and toroidal inductor design. Chapter two is about resonant circuits and covers the subjects of Q, insertion loss, impedance transformation and coupling. This leads naturally to chapter three which discusses filters.

Chapter three presents design procedures for multi-pole Butterworth, Chebyshev and Bessel filters including low pass, high pass, bandpass and band-stop designs. A really useful chapter in which there is surprisingly little mathematics considering the nature of the material.

Chapter four covers impedance matching of real and complex impedances. This is done numerically and with the aid of the Smith chart.

People who could never understand transistor RF parameters will find chapter five useful. Input and output impedance feedback capacitance and their variation with frequency are discussed and Y and S

parameters are introduced. Chapter six then builds on the preceding chapter by discussing small signal RF amplifiers and chapter seven concludes on RF power amplifiers.

The three appendices cover vector algebra, noise calculations and the bibliography.

While the book covers the above subjects quite well it is fair to say that there are a number of surprising omissions. For a start, oscillators are not mentioned at all, let alone covered. While filters have been covered in some detail, they are all LC networks and quartz crystal and ceramic filters are not mentioned. Nor is there any discussion of attenuators.

Finally, there is no discussion of integrated circuits which are nowadays used extensively in RF circuitry and nothing on stripline techniques which are mandatory for the UHF region. In spite of that list of omissions, this text is well worthwhile as a practical guide to RF circuit designing. It is not cheap though, at \$33.95 for 176 pages.

Our copy came from Technical Books & Magazine Company Pty Ltd, 289-299 Swanston Street, Melbourne, 3000. (L.D.S.)

Programming the VIC-20



VIC INNOVATIVE COMPUTING by Clifford Ramshaw. Soft covers, 151 pages, 140 x 210mm. Melbourne House Publishers, 1982 ISBN 0 86759 115 3.

Included in the 30 programs are several popular arcade games as well as strategy games such as Adventure and Chess.

Dedicated alien zappers will most likely be pleased with this publication.

Any Commodore VIC 20 owner interested in video games would find this book worth a browse. Containing very little else besides the actual programs, it is not exactly the type of "good book" one might be tempted to curl up with! The only text is a brief description of each program and an even briefer description of the game.

The review copy was supplied by Compshop Australia, 4/75 Palmerston Crescent, South Melbourne, Vic, 3205.

Recently received

THE ILLUSTRATED DICTIONARY OF ELECTRONICS (SECOND EDITION). By Rufus P. Turner. Soft covers, 891 pages, 130 x 210mm. Published by TAB Books Inc 1982. ISBN 0 8306 1366 8. Price \$23.50.

For people involved in the presentation of electronics information, it can be a full time task to keep abreast of current terminology. With over 25,000 definitions, this dictionary would no doubt prove a useful aid.

There are 600 new entries in the second edition, covering electronics, radio, audio, computers and other area. A data section contains some commonly encountered symbols and abbreviations, as well as mathematical constants and a metric conversion table. Some definitions in the data section use exclusively Imperial measurement values.

Our copy was supplied by Australian and New Zealand Book Company Pty Ltd, PO Box 459, Brookvale, NSW 2100.

★ ★ ★
INDUSTRIAL APPLICATIONS OF LEARNING CURVES AND PROCESS FUNCTIONS. IERE Conference Proceedings No. 52. Soft covers, 159 pages, 210 x 295mm, illustrated. ISBN 0 903748 47 9. Price £20.

On December 4, 1981, a conference was held in London on the above subject. This book contains the proceedings of the conference, presenting nine papers. These include discussion on the application of learning curves to highly repetitive tasks and ask how complex a learning curve model need be.

This should provide useful discussion and data for anyone involved in the area of industrial efficiency. Contact: Publication Sales Controller, Institution of Electronics and Radio Engineers, 99 Gower Street, London, UK, WC1E 6AZ.

★ ★ ★
THE INFLUENCE OF MICROELECTRONICS ON MEASUREMENTS, INSTRUMENTS AND TRANSDUCER DESIGN. IERE Conference Proceedings No. 55. Soft covers, 296 pages, 210 x 298mm, illustrated. ISBN 0 903748 50 9. Price £37.50.

Another of the IERE Conference series, this book contains papers presented at Manchester on June 30-July 1, 1982 on the above subject. Some of the topics dealt with at this conference include controlling a miniature insulin infuser, a microcomputer based stereo-scopic rangefinding and a video image processing system.

The papers provide interesting discussion on some areas of current medical and industrial electronics which should prove useful to people involved in these areas of research. Contact: Publication Sales Controller, Institution of Electronics and Radio Engineers, 99 Gower Street, London, UK, WC1E 6AZ.

★ ★ ★
HOW TO MEASURE ANYTHING WITH ELECTRONIC INSTRUMENTS. By John A. Kueken. Soft covers, 336 pages, 130 x 208mm. Published by TAB Books Inc. ISBN 0 8306 1306 4. Price \$14.95.

With 16 chapters, this book takes the reader from units of measurement through to constructing test gear. Most of the circuits utilise ICs, although discussion is provided on earlier types of electronic test gear.

Analog-to-digital and digital-to-analog techniques are described, along with chapters on temperatures, distance and force measurement. A reasonable amount of theory is provided, but little is offered in the way of applications for each of the circuits, excepting those of the final chapter which deals with automotive test equipment.

The review copy was supplied by the Australian & New Zealand Book Company Pty Ltd, PO Box 459, Brookvale, NSW, 2100.

★ ★ ★
THE MASTER HANDBOOK OF IC CIRCUITS by Thomas R. Powers. Soft covers, 532 pages, 128 x 198mm. Published by TAB Books Inc 1982. ISBN 0 8306 1370 6. Price \$21.50.


With chapters entitled Linear ICs, Voltage regulators, CMOS, TTL, Radio & TV ICs and Special Purpose Devices, this book has a collection of over 900 circuits. Particularly in the linear ICs section, there is a multitude of circuit designs which may prove of use to the hobbyist.

ICs used in the circuits (there are some 200 different types) are listed in the contents under their generic name. No manufacturer identifications are included which may prove a handicap where some of the less common ICs are concerned.

In spite of the large number of circuits the lack of any supporting data or any descriptive text at all will probably severely limit the usefulness of this book.

The review copy was supplied by the Australian and New Zealand Book Co Pty Ltd, PO Box 459, Brookvale, NSW, 2100.

INTERESTED IN ELECTRONICS? THEN WHY NOT TURN YOUR HOBBY INTO A CAREER?

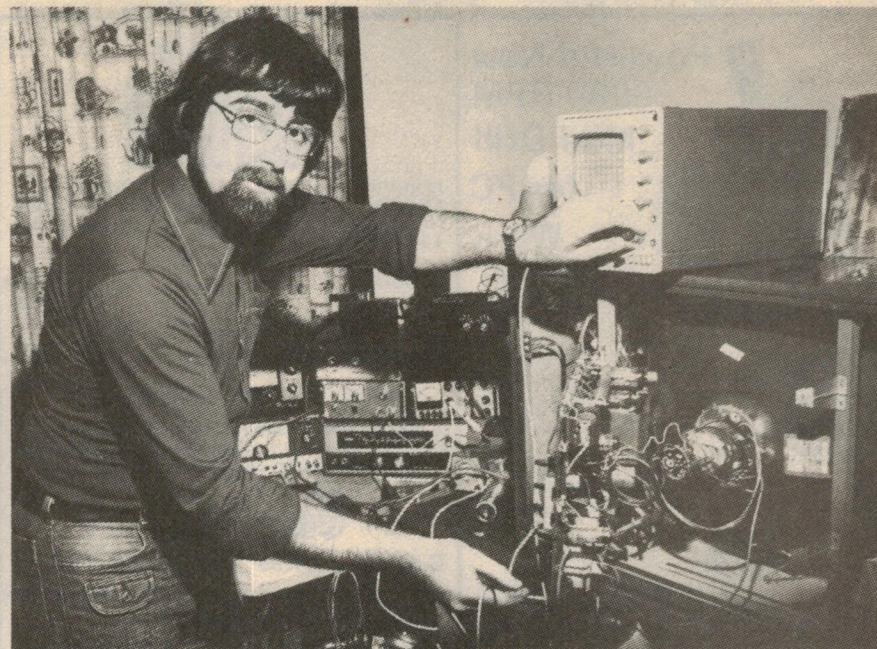

Alan Mulroney, Stott's Graduate, in his workshop.

In this fast-changing electronic world people with interest and training are going to be in demand. Turn your interest into a lucrative career in any one of the following fields:

**Computers • Industrial Controls • Medicine
Radio Communications • Domestic Radio & Television**

Electronics plays an important role in these and many other fields. With a Stott's Home Study Course, training is easy, and will prepare you for a career in the manufacture, installation, commissioning, sales or servicing of electronic equipment.

You'll have experienced, professional instructors who will guide you through an integrated theory/practical program. They'll give you individual attention and advice, and prompt replies to all test assignments and queries. And best of all, you'll study at your own pace, in your own home.

Send the coupon today. It may be the smartest move of your life.

Stotts

TECHNICAL CORRESPONDENCE COLLEGE

Melbourne, 159 Flinders Lane, 3000. Tel: 63 6212
 Sydney, 383 George Street, 2000. Tel: 29 2445
 Brisbane, Suite 3.65 Mary Street, 4000. Tel: 221 3972
 Adelaide, 85 Pirie Street, 5000. Tel: 223 3700
 W. Perth, 25 Richardson Street, 6005. Tel: 322 5481
 Hobart, 1st Fl. 29 Argyle Street, 7000. Tel: 34 2399

The name to trust in correspondence education.

Please send me free, and without obligation, full details of the following courses:

_____ (PLEASE PRINT)

MR. MRS. MISS _____ AGE _____

ADDRESS _____

_____ POSTCODE _____

Stott's undertake that no sales counsellor will visit you.

The Stott's range of courses in Electronics is:

Intro to Electronics

Digital Electronics for Technicians/ Servicemen

Microprocessors

AM Radio Receivers

Radio/TV Servicing

Colour Television

ALA/ST3596/EA1/83

NOW READ THIS!




Powerful New 6000 RPM Mini Drill for PC Work

Tons of Torque.
Just the shot for
PCB work,
12V DC
operated
from external
Power Pack
1.2mm
chuck
capacity.
Supplied c/w
1mm drill bit.

T2302 \$12.95
Drill Bits:
T2320 (0.8mm) ... \$1.25
T2325 (1.0mm) ... \$1.25

CRYSTALS


CRYSTALS	Y 1000	1-000	11.50
	Y 1003	1-8432	9.50
	Y 1006	2-000	7.50
	Y 1010	3-57945	3.00
		Solder	
		Type	
	Y 1012	4-000	5.00
	Y 1015	4-194	5.00
Parallel	Y 1017	5-000	5.00
Resonant	Y 1018	6-000	5.00
	Y 1019	8-000	5.00
Frequencies	Y 1020	10-000	5.00
Quoted	Y 1025	12-000	5.00
in MHZ	Y 1030	16-000	5.00



SOLDERING IRON STAND UNIVERSAL TYPE

T 1302 ... ~~\$5.95~~ NOW \$4.00 GOSH!

VELOSTAT



Non-static sheeting for storing CMOS IC's,
LSI's etc. 1000 times better than aluminium
foil. Will store up to 150 IC's on one 225 x
150mm sheet.

H 0500 ~~\$3.50~~
per sheet

NOW \$2.00 a sheet — GAD!

MIC INSERT ELECTRET

Great little replacement for tape recorders, etc.
Handy for hobby projects. Includes data sheet
and application circuit. 50 HZ - 15 KHZ



C 0170 ... ~~\$1.95~~ NOW \$1.00—OUCH!

SOLDER SUCKER

Quality de-solder tool
with Teflon tip
and nozzle sweeper.

T 1240 ... ~~\$14.50~~
½ PRICE \$7.25

REPLACE- MENT TIP

T 1241
\$2.75



BANKCARD PHONE ORDER

FREE DELIVERY THIS MONTH

Bankcard holders may phone your order to
us up to 7 pm (Eastern Standard Time) for
next day delivery Capital Cities and
suburbs. 48 hour delivery to virtually all
country centres.

AND WHAT'S MORE ...
WE'LL PAY THE FREIGHT!

with minimum purchase value of \$25.
Why not phone your order in "After Hours"
on our Answering Machine? — I know — we
all hate those darn tape machines — But
tell you what! Tape machine orders are
processed first thing in the morning —
even before we pick up the mail. Again free
Jetservice delivery applies this month for
orders over \$25.

AT LAST — SINTERED PLATE NICAD RECHARGEABLE BATTERIES AT A PRICE YOU CAN AFFORD



AA Size 1-2V Genuine Sintered Plate Nicad
Construction by Furukawa — arguably the top
Nicad designer/manufacturer in the world
today. Amazing low price.


Cat S3020 ea \$1.95
10-49 \$1.70, 50+ \$1.60

Incredible! UNIVERSAL MULTIMETER PORTABLE WITH BENCH STAND

23 ranges at less than \$1 per range.

* 20,000 OHMS/Volt DC * 10,000 OHMS/
Volt AC * Mirror backed scale * Overload
protected * Unique carry handle doubles as a
bench stand * High-impact resistant case * Uses
1 AA Penlight batter (incl.) * Comes complete
with battery, test leads and instructions.
RANGES: DC Voltage 0-.25, 1, 2.5, 10, 25,
100, 250, 1000. AC Voltage 0-10, 25, 100, 250,
1000 Decibels 20 to +22db DC Current 0-50,
500 uA, 0-5, 50, 500MA OHM Meter 0-6
megohms in 4 ranges, 30 ohms centre scale.
Size 135 x 91 x 39

Q 1002 .. \$22.50 4 or more .. \$21.00




A FREE Carry Case Cat. Q 1012 \$3.50
value with every meter purchased from
this advert — YES! that's right — yours
for the asking.

FAMOUS ELECTROLUBE PRODUCTS IN GENEROUS "TRADE SIZE" PACKS




ELECTRO
MECHANICAL
LUBRICANT PEN
T 3062 ... \$3.50

FREEZER
T 3080 ... \$5.50



ELECTRONIC
CLEANING SOLVENT
T 3065 ... \$6.50

CLEAR PROTECTIVE
LAQUER
T 3085 ... \$6.95




YOUR MONEY BACK

PLUS \$5 If Altronics Jetservice Delivery is not the Best in Australia

ORDER FROM ALTRONICS WITH COMPLETE CONFIDENCE. Compare this check list with any other Australian Electronics Supplier ... ★ Delivery Time ★ Packing ★ Product Quality ★ Value for Money ★ Technical Queries Answered ★ Prompt Back Order Advice of not in stock items.
If after receipt of your Jetservice order you are not convinced Altronics service is superior to any other Australian Electronics Supplier you may return your purchase to us for a full refund plus \$5 for your trouble.
Regards

Jack O'Donnell

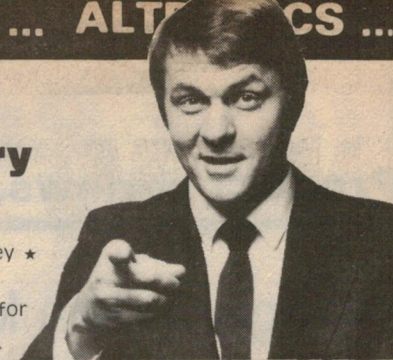

WEATHERPROOF SIREN HORN

12V DC operated — Deafening Siren Wail. Super handy for audio signalling, security systems etc. Current drain 500mA approx. Completely weatherproof. Attractive off-white PVC finish.



S 5058 ... ~~\$19.50~~ NOW \$15.00 ea.

PIEZO ALARM

Similar to "Sonalert" type. Absolutely ear piercing sound. Recommended voltage 5-15V DC. Ideal for almost all audio signalling applications, i.e. fire, water and gas signalling, computer alarms, etc.




S 5066 ... ~~\$4.95~~ NOW \$4.50 each

D25 SERIES CONNECTORS

Universal 25 Pin Computer Series

P 0900 Male 25 Pin ... ~~\$5.50~~ NOW \$3.95
P 0901 Female 25 Pin ... ~~\$5.50~~ NOW \$4.50
P 0905 Backcover ... ~~\$3.50~~ NOW \$2.50



SAVE
NEARLY
30%

VINYL BINDER

Holds 12 magazines, each on a spring out wire rod. Just the shot for each year's set of Electronics Australia, ETI or any of your favourite magazine.


Suits all A4 size publications (275 x 210). Very smart Royal Blue colour with beautiful gold embossing.

B 9999 ... ~~\$5.50~~

THIS MONTH

\$5.00 each

4 or more \$4.50 each

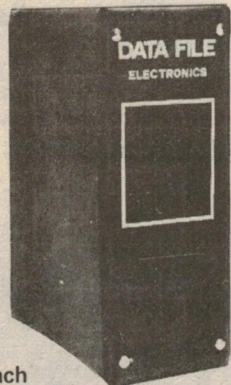

Incredible Value

Dainichi Loudspeakers


DAINICHI WIDE RANGE 25 Watt



200 mm (8 in.). This superbly smooth high power speaker comes from Dainichi, one of Japan's finest speaker manufacturers (they produce OEM Speakers for Pioneer). Max. input power 25W 8 OHM Z. Resonant to 60 HZ. Huge 10 OZ Magnet frequency response 40 HZ-18 KHZ.

C 2001 \$19.50
4 or more \$17.00

DUAL CONE WIDE RANGE



200 mm (8 in.). 10 Watts Max. power input. Public Address, Background Music, Ideal Hi Fi extension speaker. Includes transformer holes at 51 mm.

Over 30,000 sold in Australia!

Mounting holes 140 x 140 mm


C 2000 \$8.50
10 Up \$7.90

INTERLOCKING PARTS DRAWER


Unique side and top/bottom keying system allows you to use just a few or build a whole wall of drawers as your parts expansion dictates. Quality designed drawer slides will not "stick" or seize. Slide handle also takes ident. cards. Single or double drawers available.

H 0435 Single Way ... \$2.20

H 0436 Double Drawers ... \$2.20

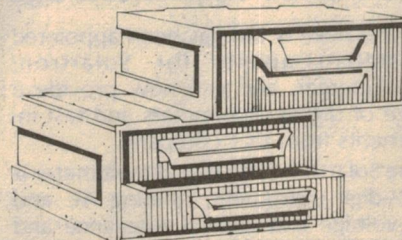

(Clear Lid not illustrated)

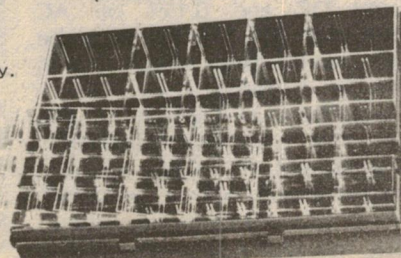


TECHNICIAN PARTS CASE

See through acrylic parts tray and see through lid. Ident. label system. Movable compartment dividers. Two lift out compartment trays plus one extra deep tray. Great for screws, semis, passives etc.

H 0450 ...

\$17.50

New 10mm Digit LCD Clock Module



Uses the new NEC UPD833G LSI and quality EPSON LCD display.

Size 60 x 38 x 10mm, operates from 1.5V DC. Display selectable to 12 or 24 hour format. AM/PM Display.

Inbuilt control timer selectable to 15, 30, 60 and 120 minute intervals.

Stop watch facility to 24 mins duration. Alarm timer, Snooze timer, Sleep timer.


An incredible diversity of applications.

i.e. clock radio, travellers watch, stop watch, digital alarm clock, sleep timer, snooze timer, appliance timer, sequential controller, dual time clock.

And the best news is the low price!

Y 1020 ... \$16.50

MINI TOGGLE SWITCHES



OEM QUALITY
250V 2 AMP
RATED

		PRICE	10 UP
S 1010	SPDT	\$1.20	\$1.00
S 1025	SPDT Centre off	1.40	1.20
S 1020	DPDT	1.40	1.20
S 1030	DPDT Centre off	1.95	1.75

DIL Switch Bargains

GOLD PLATE SELF WIPING CONTACTS



S 3050 4 way \$1.25
S 3060 8 way \$1.75

KEY OPERATED SWITCH



19.5 mm mounting hole required. Supplied with two keys. Hundreds of applications for security type applications.

S 2500 ... \$6.95

NOW ONLY \$5 EACH

ALTRONICS

For Address, Phone No. and Despatch details see our Double Page Advertisement pages 66 - 67

New Products...

Product reviews, releases & services


Intelligent data logger from Dindima

In a move to bridge the gap between data loggers and digital panel meters, Monitor Labs has developed the "Calc-U-Logger", the first of its forthcoming Series 2000 universal process indicators. This unit accepts 3 pulse and 12 analog inputs and provides 3 analog outputs.

Combining the capabilities of a stack-orientated scientific calculator (using reverse Polish notation) with those of a process monitor, the device can be programmed for specific applications through a keyboard. The underlying logic is programmed by the manufacturer in a Forth high-level language, known as FIG Forth, which supports the assembly-language routines of the unit's CPU, a 6502.

In many ways it resembles a state-of-the-art intelligent datalogger. It has analog, thermocouple and pulse inputs, alphanumeric data identification, alarms, analog output and RS232 or IEEE 488 output. The operator can specify data reporting rates, alarm levels and a multitude of other operating characteristics with the front panel alpha-numeric keyboard.

A 12-character alphanumeric LED display presents input and output parameters specified by the user. Other output options include RS-232 or IEEE-488 (GPIB) cards, with TTL levels for alarms. The basic device uses a single I/O card, which accepts four analog inputs

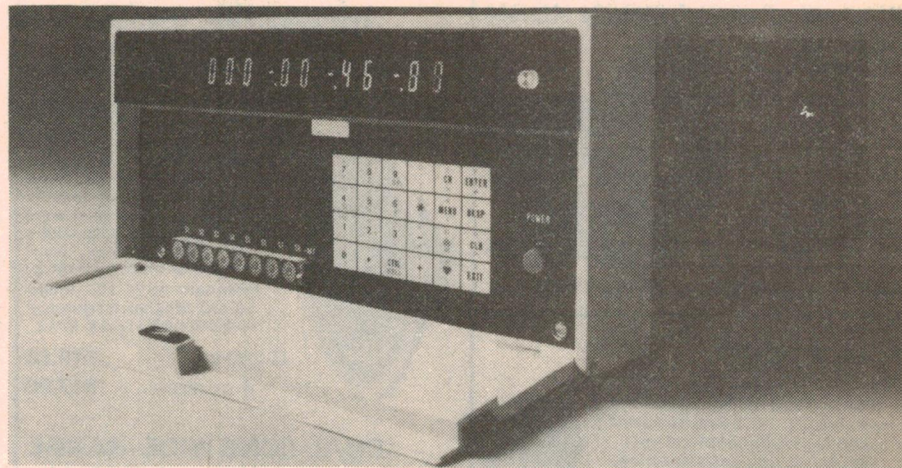

and one pulse input and optionally produces one analog output and two additional I/O cards can be added.

The user programs separate sets of data inputs and the required calculations for each board. The user whose system contains, say, three I/O boards receives either automatically rotating display reports for each of the three calculation groups, or a concatenated single report, drawn from all three groups. A simple menu procedure establishes the characteristics of a particular calculation group.

Four alarms can be assigned to inputs or calculated results, either establishing high or low levels or setting a deadband.

Alarms in the set condition are shown in the standard report format of the display. With the RS-232 option, annunciator outputs are conditioned and reports are sent when a change in alarm state is detected.

Even calculations can be entered by the operator. The equation to be solved is entered using the RPN technique with a memory stack to handle calculation hierarchy. Standard functions include +, -, ×, ÷, MOD, INT, RND. Optional functions include SIN, COS, TAN, SIN⁻¹, COS⁻¹, TAN⁻¹, LOG X, LN X, 10^x, e^x and X^y.

For further information contact The Dindima Group Pty Ltd, PO Box 106, Vermont, Victoria 3133.

New range of LED backlight displays

Sharp Corporation has introduced a range of LED backlight panel displays featuring high luminous intensity at low currents combined with uniform light emission.

Three colours are available, red, yellow-green and yellow, and dichromatic types can also be supplied. The devices are intended to be used with masks containing cut-outs of the word or symbol to be displayed. Several different sizes and shapes are included in the range, from 7 × 9mm to 7.9 × 19mm panels.

The indicators are distributed in Australia by Daneva Australia Pty Ltd, 66 Bay Rd, Sandringham, Vic. 3191. Phone (03) 598 5622.

Tech-Sales appointed agent for Solartron

Tech-Sales Pty Ltd has been appointed Australian agents for Solartron/Schlumberger, and can now provide a range of digital multimeters and test instruments from that company.

The Solartron 7045 digital multimeter is a 4½-digit instrument, offering AC and DC voltage and current resistance and temperature measurements in a portable package. Accuracy is quoted as 0.01% on DC and 0.15% on AC measurements, and the unit may be powered from the mains or from built-in rechargeable batteries.

Also available from Tech-Sales is the Solartron 7150, a 6½-digit multimeter, providing DC and AC voltage and current measurements and a resistance range. Features of the instrument include automatic null and a selectable digital



filter for ease of measurement. An IEEE-488 interface is standard for use in automatic test and measuring systems.

For further information contact Tech-Sales Pty Ltd, 83 Wellington Street, Windsor Vic 3181 (03) 51 1306.

Fibre optic components from Soanar electronics

Soanar Electronics Pty Ltd is now stocking fibre optic components and accessories at all branches throughout Australia.

Optical fibre cable is available in continuous lengths in multiples of one metre to maximum of one kilometre. The 125 micron fibre in 2.7mm diameter cable is designed for high flexibility and tensile strength and can be supplied plain or prefitted with connectors at the factory.

For those wishing to fit connectors themselves Soanar have cutting and stripping tools to remove the covering from the optical fibre and then cut the fibre squarely for a mirror-like surface.



Two types of connector are stocked by Soanar. One type enables fibre optic cables to be joined together and the other type couples the fibre to active components. Motorola and Australian AMP co-operated on the design of the active component connectors to ensure that their fibre optic products were entirely compatible.

Soanar also have a range of Motorola fibre optic active components available including emitters, detector/preamplifiers, transmitters and receivers.

Further information on these products is available from the Soanar Branch in your state or by contacting the head office. Soanar Electronics Pty Ltd, 30 Lexington Road, Box Hill, 3128. Telephone 840 1222


New Sanyo torch uses rechargeable batteries

Sanyo Australia has introduced a rechargeable torch, the model NL 2000, which avoids the inconvenience and expense of replacing batteries. The "Cad-nica" torch can be recharged by simply slipping the batteries into a built-in recharger and plugging it into any power point.

The torch will provide up to 70 minutes of use on one charge.

For details contact Sanyo Australia Pty Ltd, 225 Miller Street, North Sydney, 2060. Phone (02) 436 1122.

Krohn-Hite automatic distortion analyser

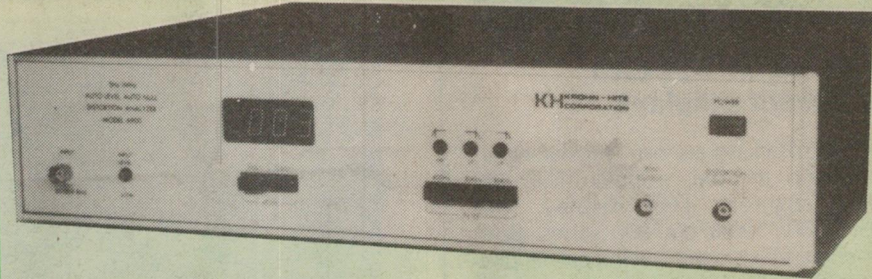

Warburton Franki now has available the new Krohn-Hite Model 6900 distortion analyser, providing automatic frequency nulling and level setting for fast measurements of distortion or AC voltage over a frequency range of 5Hz to 1MHz.

Total harmonic distortion is displayed on an auto-ranging digital read-out, with measurements ranging from 0.005% to 19.9% THD with a resolution of 0.001% and input levels from 100mV to 130V RMS. As an AC voltmeter the 6900 will measure from


10mV to 130V with an accuracy of 2%.

A distortion output is provided for oscilloscope inspection of the input signal after the fundamental frequency has been filtered out. An analog output is also available, providing a DC voltage which is proportional to the percentage measurement of the distortion displayed.

For further information contact Warburton Franki Pty Ltd, 372 Eastern Valley Way, Chatswood, NSW 2067.

Bench press assembles mass-terminated cables

Scope Laboratories has released a bench press for use with mass terminated cable connectors. Called the "Dilp", the press can handle any type of flat top plug, socket or D-type mass termination connector with 0.3 or 0.6 inch pitch up to a maximum of 50 pins.

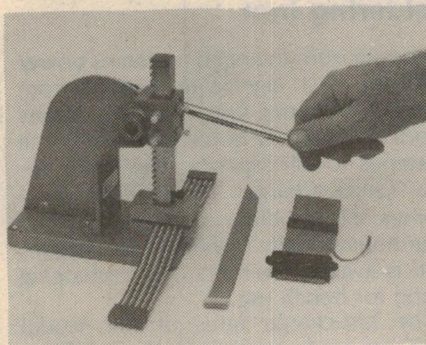

The Scope Model Dilp sells for "under \$200" complete with tooling for a variety of connectors. It is bench mounted and weighs less than 3kg.

For further information contact Scope Laboratories, 3 Walton St, Airport West, Vic, 3042. Telephone (03) 338 1566.

Rifa to distribute Texas Instruments' parts

Rifa Electronics has been appointed a distributor of Texas Instruments semiconductors and IC sockets. The announcement was made by Texas Instruments Australia's managing director

Mr Peter Dixon and semiconductor marketing manager Mr Ian Hawkins.

According to Mr Dixon, "the appointment of Rifa is an important step in our continuing efforts to increase TI's penetration in the highly competitive semiconductor market in Australia. We are very, very glad to have them on our team".

For further information contact the head office at PO Box 95, Preston, Vic. 3072. Phone (03) 480 1211. In Sydney ring 570 8122.

Revised standard for mains-powered gear

The Standards Association of Australia has published a revision of its standard approval and test specification for mains operated electronic and related equipment for household and similar general use.

AS 3250 has been prepared at the request of approvals authorities to maintain safety standards and align with international (IEC) requirements. The standard establishes essential requirements and minimum safety for the design and construction of mains operated electronic and related equipment.

It is intended that AS 3250 will supersede AS 3159 two years after its publication on November 8, 1982. During this period, however, both specifications will run concurrently and it is expected that regulatory authorities will approve equipment to either of them.

Copies of AS 3250 can be purchased from any SAA office at a cost of \$18.40 plus \$2.50 postage and handling charge.

New Products

New Hewlett-Packard 7-segment displays

Hewlett-Packard are now producing an equivalent to the popular FND-500 seven segment LED display, the HDSP-5300/5500/5700/5800 series. Both numeric and ± 1 overflow indicators provide a right hand decimal point and are available in common anode or common cathode formats.

The devices are categorised for luminous intensity, with all segments of the display matched for common luminous intensity, and multiple devices matched to ensure a display of uniform brightness.

Red, high-efficiency red, yellow and green displays are available. Segments have mitred corners but the displays do not include an integral polarising filter.

Luminous intensity of the HP displays is said to be up to 30% greater than competing types, enabling the users to either provide a brighter display for the same power consumption or reduce power consumption for the same brightness.

Hewlett-Packard components are distributed by STC-Cannon Components Pty Ltd with branches in Adelaide, Brisbane, Melbourne, Perth and Sydney.

A range of accessories for the TV serviceman


Matthey Electronics currently has available a series of 75 Ω miniaturised low pass video filters, the FLW series, with cut off frequencies from 2.5 to 10MHz. The series offers a flat pass band and sharp cut off, and a stop band attenuation of greater than 45dB at frequencies up to 100MHz.



Matthey Electronics also has available a small low pass filter which allows an oscilloscope to be used to make differential gain measurements in TV circuits. No specialised equipment is needed other than the filter, and details of the technique are available on request.

For further information contact Johnson Matthey Ltd, 160-170 Rocky Point Rd, Kogarah, NSW, 2217.

Logic monitor from Vicom International

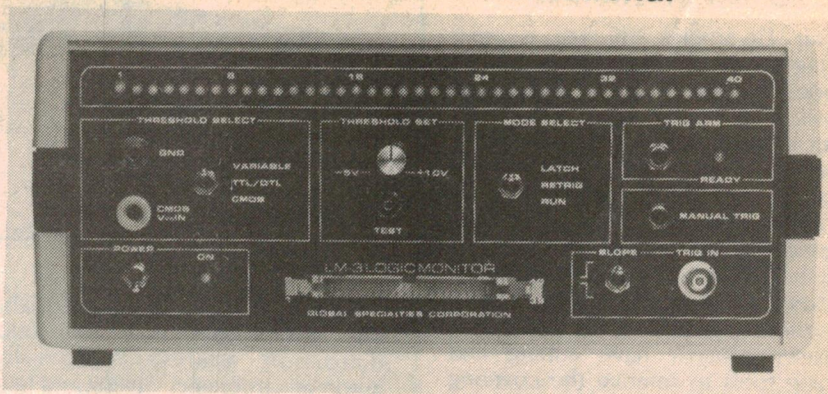

The LM-3 logic monitor from Global Specialities Corporation combines 40 variable threshold logic state indicators with a triggered latching circuit to create a flexible logic test instrument. The variable threshold facility allows the LM-3 to monitor up to 40 points on any type of circuitry, while the triggering modes mean that the logic monitor can be used to follow logic states or freeze the display to examine a particular circuit condition.

The LM-3 is supplied with a 40-way ribbon cable terminated in clips which fit on to the circuit point being tested. Forty discrete LEDs on the front panel indicate the logic state of the inputs.

A selectable threshold control can be adjusted for use with any logic family and with positive or negative supply voltages. Input impedance is 0.5M Ω and the instrument works at clock speeds of up to 5MHz.

Applications include monitoring the operation of microprocessors and related circuitry, and process control, where the LM-3 can be used to monitor the status of 40 different digital signal or alarm lines simultaneously.

The unit is mains powered and measures 76 x 254 x 178mm. Global Specialities Corporation is represented in Australia by Vicom International Pty Ltd, 57 City Rd, South Melbourne, Vic 3205.

"Quick charge" cordless soldering iron

Freedom from the need for mains power was the first significant benefit from cordless soldering irons, however, many models require 12 hours to recharge the batteries to full capacity. The Wahl Iso-Tip "Quick Charge" Model 7700 overcomes this problem. It requires about four hours to fully recharge the batteries and is available with its own recharging stand for bench use.

The fast-charge rates of the Model 7700 are made possible by the combination of special nickel-cadmium cells within the iron and the charger stand which continually recharge while the iron is idling. The Model 7700 also features an improved header which holds tips firmly in place by friction.

A rotatable pushbutton switch activates the soldering tool, and may be indexed to either of two positions. In the Use position the button can be pushed far enough to allow the tip to be powered and when the iron is not in use, the Lock position ensures that it cannot be accidentally turned on. When the power button is pressed, a special screw-in lamp located in the header illuminates the work area, and the tip reaches soldering temperature within about five seconds.



Full details are available from the Australian distributors Royston Electronics, 27 Normanby Road, Notting Hill, Vic 3168. Telephone (03) 543 5122.

WE ARE NOW OPEN AT 48-50 A'BECKETT STREET, MELBOURNE



OUR LOWEST PRICES EVER ON SEMI-CONDUCTORS AND IC's

WE NOW HAVE TWO LOCATIONS

	1-24	25-99	100plus
2708	4.90		
2716 5V	4.50	4.00	3.50B
2732 5V	5.50	5.00	4.50B
2114 300NS	2.10	1.90	1.80B
4116 200NS	1.40	1.30	1.20B
8164 64x1K DYN. RAM	7.00	6.50	5.50B
Z80 CPU 2MEG	6.00	5.00	4.00B
Z80ACPU 4MEG	7.00	6.00	4.20B
Z80P10	5.00	4.50	4.00B
Z80AP10	6.00	5.00	4.20B
Z80CTC	6.90	5.10	4.80B
Z80ACTC	8.40	6.00	5.70B
Z80S10/0	15.00	14.00	10.00B
Z80AS10/0	16.00	15.00	11.00B
8212	3.00	2.50	2.10B
8214	6.00	5.50	4.90B
8224	4.90	4.50	4.20B
8251	4.90	4.50	4.20B
8255	5.50	4.30	4.00B
6800	5.50	5.00	4.50B
6802	8.00	7.00	6.20B
6821	2.50	2.20	2.00B
6850	2.50	2.20	2.00B
FD1771	15.00	14.00	13.00
FD1791	24.00	23.00	21.00B
FD1795	27.00	25.00	23.00B
8080A	5.00	4.50	4.20B
8085	6.00	5.00	5.00B
7400	.18	.17	.16B
7410	.18	.17	.16B
7421	.18	.17	.16B
74LS00	.18	.17	.13B
74LS10	.18	.17	.13B
74LS32	.18	.17	.13B
74LS74	.45	.41	.30B
74LS240	.80	.70	.60B
74LS241	.80	.70	.60B
74LS242	.80	.70	.60B
74LS244	.80	.70	.60B
74LS245	1.00	.90	.90BN
81LS95	1.70	1.50	1.40B
81LS96	1.70	1.50	1.40B
81LS98	1.70	1.50	1.40B
8131	2.10	1.90	1.70B
BC547-8-9	.10	.09	.07A
BC557-8-9	.10	.08	.07A
RED LEDS 5mm	.10	.08	.07B
IN4001	.04	.035	.032B

WE HAVE A WIDE RANGE OF BOXES AND POWER SUPPLIES FOR DISC DRIVES

DISC DRIVES

MPI 51.....	\$285.00 + 20% S.T.
MPI 52.....	\$395.00 + 20% S.T.
MPI 91.....	\$425.00 + 20% S.T.
MPI 92.....	\$525.00 + 20% S.T.

	1-24	25-99	100plus
IN4002	.05	.04	.035B
IN4003	.05	.04	.035B
IN4004	.06	.04	.039B
IN4007	.11	.09	.07B
IN4148	.04	.03	.025B
IN5404	.20	.018	.017B
IN5408	.25	.023	.021B
BU126	1.70	1.50	1.30A
BUX80	2.50	2.20	2.10A
TIP50	.99	.89	.81A
BD139	.40	.30	.22A
BD140	.40	.30	.22A

LINEARS

	1-24	25-99	100plus
LM308	.60	.45	.40A
LM555	.29	.26	.25B
LM741	.29	.26	.25A
LM317K	2.90	2.50	2.40B
LM350K	6.50	5.50	4.90B
LM380-14	1.10	1.00	.90A
LM324	.80	.65	.55A
CA3130T	1.50	1.40	1.30A
CA3140T	1.50	1.40	1.30A
RO-3-2513	11.00	10.90	9.50B
7805	.50	.40	.38B
7812	.50	.40	.38B
7815	.50	.40	.38B
7905	.60	.50	.45B
7912	.60	.50	.45B
7915	.60	.50	.45B
MDA3501	3.40	3.20	3.10B
MDA3502	3.50	3.30	3.20B
MDA3504	3.90	3.60	3.30B
FND357	1.00	.95	.78B
FND500	.95	.90	.78B
FND507	1.00	.95	.78B
78HO5	6.50	5.90	5.00B
78HGKC	6.90	6.50	5.90B
78PO5	9.90	9.50	8.90B
4001	.19	.18	.16B
4002	.19	.18	.16B
4007	.19	.18	.16B
4011	.19	.18	.16B
4077	.19	.18	.16B
4081	.19	.18	.16B
4093	.60	.55	.50B
4082	.19	.18	.16B
4017	.70	.60	.50B
2SK134	4.90	4.75	4.30A
2SK49	4.90	4.75	4.30A
MJ802	4.50	4.00	3.50A

	100+	1000+	100+	1000+
DB25C	1.00	.90	4116	1.30
DB25P	1.90	1.70	2716	3.50
DB25S	2.90	2.75	2764	9.00

ALL SEMI-CONDUCTORS ARE PLUS TAX

TAX A = 32½% TAX B = 20%

RITRONICS WHOLESALE

425 HIGH STREET, NORTHCOTE 3070. MELBOURNE. (03) 489 8131.
48-50 A'BECKETT STREET, MELBOURNE

TO ORDER: Heavy items sent Skyroad Mail Order Phone 481 1436. Wholesale Customers
Phone: 489 7099. Mail Orders to RITRONICS WHOLESALE, P.O. Box 235, Northcote 3070.
Telex No. AA38897. Minimum P&P \$2. Add extra for heavy items, registration and
certified mail. Prices and specifications subject to change without notice.


DON'T FORGET WE ARE THE PRINTER PEOPLE!!!!

Bankcard mail orders welcome
ORDER FORM
Please Debit my Bankcard
No.....
Expiry Date.....
Name.....
Signature.....

New Products

Tools and parts from Selectronic Components

Selectronic Components of Bayswater, Victoria, are the Australian distributors for "Channellock" pliers, a range of precision made, drop-forged tools for the electronics hobbyist and technician. Included are flat and round-nosed pliers and diagonal and transverse end cutters.

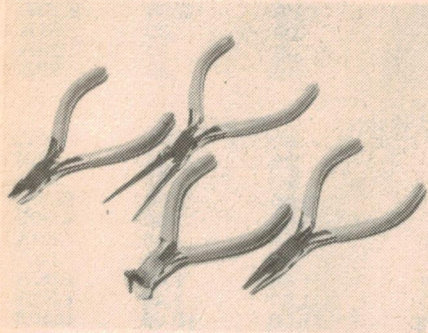

Also available from Selectronics is the TAI range of audio input transformers, designed and manufactured in Australia.

The TAI series 261, 262 and 263 transformers have an input impedance of 600 Ω , 15k Ω and 30k Ω respectively. Frequency response is given as ± 1 dB from 20Hz to 20kHz, and total harmonic distortion as less than 0.4% at 30Hz, -10dBm.

For further information contact Selectronic Components Pty Ltd, 25 Holloway Drive, Bayswater, Vic. 3153. Phone (03) 762 4822.

Digital gain control IC on the way

National Semiconductor Corporation has introduced a monolithic IC package containing precision resistors, analog switches, latches and a data bus interface to be used for digital control of the gain of high input impedance operational amplifiers.

Designated the LF13006 and LF13007, the digital gain control packages allow the user to set voltage gains for standard op amps with a 3-bit control word from a microcomputer. On-board address latches and the ability to operate from supplies of up to ± 18 V make the devices easy to use in analog circuitry.

The LF13006 provides gains from one to 128 in eight binary weighted steps while the LF13007 provides a 1, 2, 5... 100 gain sequence. Both devices have additional outputs to allow precise setting of the gain range and another pair of matched resistors, not connected internally, are available to modify the gain range.

Panel meter combines digital and bar display

C & K Electronics (Aust) Pty Ltd, distributors for Sifam Ltd of England, now has available a new combined digital/analog panel meter offering a precise digital read-out together with analog bar graph indication.

Called 'Harmony', the LCD meter is a compact, rectangular display, resembling a conventional digital meter but incorporating a horizontal bar graph — the length of which fluctuates in proportion to the reading.

Essentially a millivoltmeter with a range of 0-50mV DC and optional current ranges of 100 μ A and 1mA, the digital readout provides a maximum display of 9999. The bar graph, made up of 31 segments, grows or falls alongside a printed scale located just beneath the digital display.

To the right of the main display there is an extension of the LCD strip which can be used to indicate the meter range in use (eg multipliers $\times 1$, $\times 10$ etc.) or the specific engineering units being measured (rpm, %, $^{\circ}$ C etc.). Up to five such indications are available — the one in use being signalled by a "flag" against a pre-printed scale. This facility is built-in

as standard and the user can opt to use it or not as required simply by making appropriate external connections.

In addition to its dual display, the new meter also constitutes what is believed to be the first digital meter capable of being programmed to read in any engineering unit — including non-linear quantities. It can also be programmed to function as a meter relay, initiating alarm or control signals at fixed or variable set points.

For further information contact C & K Electronics (Aust.) Pty Ltd, PO Box 229, Parramatta. Telephone 635 0799.


United States company offers buying services

Arnat Electronics of New York are offering buying and delivery services for Australian companies which use components made in the United States.

Large companies can afford to maintain their own overseas purchasing offices, but for smaller operations the services of an overseas agent can be a useful alternative to dealing directly with a United States supplier or with a local importer.

For further information contact Arnat Electronics, PO Box 235, South Station, Yonkers, NY, 10705, USA.

Simple interface for digital/analog converter

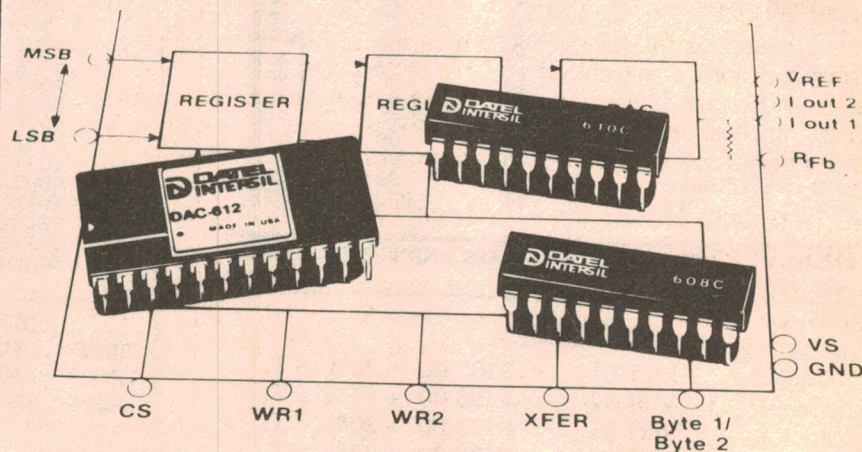

Datel-Intersil's DAC608, DAC-610 and DAC-612 are a series of 8-, 10- and 12-bit digital to analog converters designed to connect directly with the standard control bus of 8080 family microprocessors. The devices appear either as a memory location or an I/O port to the microprocessor and do not require additional interfacing logic.

All devices feature a double buffered output which allows the converters to output an analog voltage corresponding to one digital word while the next is latched off the

microprocessor data bus. The required control inputs are available in most popular microprocessor systems, although all models will operate as normal (single-buffered) D/A converters when used without a processor.

Output settling time is quoted as 500ns for a full scale change, and maximum linearity error is said to be $\pm 1/2$ bit.

Datel-Intersil devices are distributed in Australia by Elmeasco Instruments Pty Ltd, PO Box 30, Concord, NSW, 2137. Phone (02) 736 2888.

Designer Series Books from Parameters

1982 Databook Set

\$10.00

This 1,000 page, two volume set, comprises extensive information on a wide range of data acquisition and control products and systems. They contain comprehensive applications and seminar material of immense value to design engineers in almost every field of electronics.

Each product classification is preceded by an orientation section fully explaining the design and product selection criteria essential to users.

Analog to Digital Conversion Notes —

250 pages

\$13.00

A very complete guide to the application and implementation of A/D and D/A converters. Required reading for any design engineer involved in data conversion, it also covers subjects such as performance specifications and their relevance in design.

Non-Linear Circuits Handbook — 500 pages

\$13.00

A guide to the design of analogue, non-linear instrumentation systems. Subjects covered include: true RMS conversion, sine/cosine conversion, time and function fitting, linearising systems, logarithmic systems and discontinuous functions.

Microprocessor Systems Handbook —

194 pages

\$20.00

After providing a basic rundown on microprocessor architecture this book takes the designer into the world of A/D and D/A converters. It discusses all the various types and moves on to interfacing such devices with microprocessor systems.

Transducer Interfacing Handbook —

250 pages

\$18.00

An extremely useful guide for design engineers who require to interface any sort of transducer to electronic systems. It covers isolation, offsetting, filtering, linearising and noise elimination as well as many practical design considerations. This book is so highly regarded that it has been selected as a standard text by Universities.


Synchro and Resolver Conversion Handbook —

200 pages

\$15.00


A required reference for any engineer involved in numerically controlled machinery design or military electronics. This book discusses design criteria and techniques for angular position measurement.

The reader is taken through extensive information on the application of such devices as optical shaft encoders and synchro to digital converters.

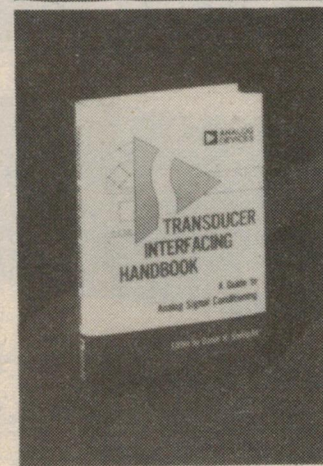

These books are available from Parameters Pty. Ltd. directly or from your nearest Analog Devices Stockist.

If your company has an account you may order them directly. If you do not have account facilities simply fill in the coupon below, mail it to us with a cheque and we will forward your selection by return.



SYDNEY (02) 439 3288
MELBOURNE (03) 580 7444

ADELAIDE: Trio Electrix (08) 51 6718 BRISBANE: L. E. Boughen & Co. (07) 369 1277
CANBERRA: Ortex (062) 82 4995 HOBART: Imbros (002) 34 9899
NEWCASTLE: DGE Systems (049) 69 1625 PERTH: W. J. Moncrieff (09) 325 5722
TOWNSVILLE: Nortek (077) 79 8600 WOLLONGONG: Macelec (042) 29 1455

Please send me the following book(s)

- | | |
|---|---------|
| <input type="checkbox"/> 1982 Databook Set | \$10.00 |
| <input type="checkbox"/> Transducer Interfacing Handbook | \$18.00 |
| <input type="checkbox"/> Analog to Digital Conversion Notes | \$13.00 |
| <input type="checkbox"/> Non-Linear Circuits Handbook | \$13.00 |
| <input type="checkbox"/> Microprocessor Systems Handbook | \$20.00 |
| <input type="checkbox"/> Synchro and Resolver Handbook | \$15.00 |

I enclose a cheque for \$

Name

Company

Mail Address

Parameters Pty Ltd.
P.O. Box 573
Artarmon N.S.W. 2064



MAGNIFICENT! NEW 5000

DAVID TILLBROOK HAS DONE IT AGAIN!! 5000 SERIES 1/3

5000 SERIES GRAPHIC EQUALISERS

ALL IC
SOCKETS
PROVIDED

AUSTRALIAN (NOT HONG KONG)
MADE - SPECIAL BUILT RACK
CABINET - QUALITY!!!

SPECIFICATIONS:
Signal-to-Noise: -102dB
with respect to 1 Volt
Frequency Response:
12Hz - 105kHz to -1dB
Boost/Cut: 14dB (28dB
total)
Distortion: 100Hz-0.007%
1kHz-0.007%
10kHz-0.008%
(essentially irrespective of
cut or boost)
Current consumption (DC)
Approx 100mA @ $\pm 15V$
(Requires 30V AC CT)
Output short-circuit proof.

Latest addition to the thoroughbred 5000 Series stable! David Tillbrook has once again produced a 'No Compromise' design. This new component, a 1/3 octave equaliser, gives you ABSOLUTE CONTROL over the acoustics of your particular listening environment. You get 3 SEPARATE CONTROLS for every octave of audio bandwidth to virtually eliminate the subtle nuances that are particular to your listening area.

1/3 octave equalisers have been used by professional engineers in Recording Studios and live concerts for over a decade now. It is no accident that the advent of the 1/3 octave equaliser and studio quality live sound have gone hand-in-hand. BUT THERE'S A CATCH. One of these equalisers is not enough. You will have to buy 2 (for stereo). Quite a lot of money - but worth it if you want the best.


For those whose budget does not extend to \$389, may we suggest the 2010MkIIA octave (10 band) equaliser. This unit is rack mounted and in the same format as the 5000 series equaliser. It is stereo (in one 3 1/2" cabinet) with one slider per octave. Basically an upgrade of the ETI 485 graphic, it represents outstanding value for money at only \$139.00.

The Jaycar kit includes a fully prepunched plated chassis, prepunched heavy gauge front panel with silkscreened front panel to match the other 5000 components. It is absolutely original. You can purchase the kits one at a time for \$199 ea. or, for two, \$389 - a \$10 saving. If you are one of the hundreds of happy 5000 users we are convinced that you will be just as delighted with this unit.

BUY 2 AND SAVE \$10 - ONLY \$389

only
\$199

"BLACK MONOLITH"

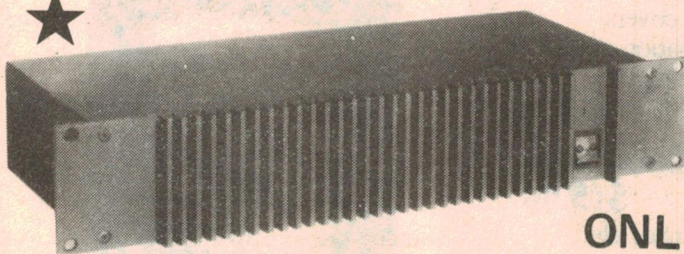

Once again, imitation is the sincerest form of flattery. The Black Monolith 5000 Mosfet Power Amp has the following EXCLUSIVE features:

- Beryllium Oxide (Space Age ceramic) TO-3 washers. (Not flimsy mica)
- Jig drilled and extruded heavy gauge, anodised heatsink bracket.
- SUPERFINISH front panel. STILL THE BEST now with blind tapped holes.
- New heavy duty heatsinks for the driver transistors. 100% extra heatsink area and black anodised for greater efficiency. (Not in original design).
- Ventilation holes in metalwork at critical points. (Not in original design).
- Extra 3 pin DIN socket on rear panel (total 2) to power new 5000 components. (1/3rd Octave 5000 series Equaliser coming soon!). Not in original design but now a must with the new additions in the family.

IF YOU THINK THAT YOU CAN SAVE MONEY ON THESE KITS ASK YOUR SUPPLIER IF HE WILL GIVE YOU ALL OF THESE FEATURES AT THE PRICE. MAKE SURE THAT YOU GET IT IN WRITING!!

A PRICE RISE ON BOTH KITS (i.e. SALES TAX AND METALWORK ETC.) IS EXPECTED SOON! BUY THE BEST FOR NO MORE.

Write in (SAE) for a new glossy leaflet on both amps.

SPECIFICATIONS

POWER OUTPUT	Around 100W RMS into 8 ohms
FREQUENCY RESPONSE	8Hz to 20kHz, +0 - 0.4dB 2.8Hz to 65kHz, +0 - 3dB Note: these figures are determined solely by passive filters
INPUT SENSITIVITY	1V RMS for 100W output
HUM	- 100dB below full output (flat)
NOISE	- 116dB below full output (flat 20kHz bandwidth)
2nd HARMONIC DISTORTION	<0.001% at 1kHz (0.0007% on prototypes) at 100W output using a *56V supply rated at 4A continuous <0.003% at 10kHz and 100W
3rd HARMONIC DISTORTION	<0.0003% for all frequencies less than 10kHz and all powers below clipping
TOTAL HARMONIC DISTORTION	Determined by 2nd harmonic distortion (see above)
INTERMODULATION DISTORTION	<0.003% at 100W (50Hz and 7kHz mixed 4:1)
STABILITY	Unconditional


ONLY
\$319

"BLUEPRINT"

5000 PREAMPLIFIER

- "One Swallow does not make a spring"
- Neither does a few gold RCA sockets!
- Several of our competitors are imitating our "Blueprint" preamp by adding a few bits and pieces, notably gold plated RCA sockets to their standard kits. Unfortunately they have missed the point. We supply gold plated sockets in our "Blueprint" preamp but only where it makes sense to do this, i.e. on the inputs - NOT the outputs. 16 gold sockets are provided by us. This, however, does not make a "Blueprint". THIS DOES:
- Low capacitance screened cable - 12 metres of it. NOT Taiwanese cable as supplied in other kits. Our cable costs us NEARLY 5 TIMES MORE than the Taiwanese stuff.
- Original ETI designed front panel. Not an "ADAPTION". Our front panel is by far the nicest.
- Factory pre-tinned PCB's to reduce chances of dry or noisy solder joints.
- Quality LEDs, polished finish, multicoloured display.
- IC sockets on line amp board.
- Special rear panel.
- Special low noise selection LM394H NOT CH device in M.C. preamp.
- Thermalloy (U.S. made) heatsink on 7805 regulator.
- English Lorin selector switches.
- Apart from the 16 gold RCA's we throw in a pair of gold plated line RCA plugs - worth \$5.
- Special Nylon rear panel grommets.

So don't "Swallow" the facts before they are properly digested!! You can't make a silk purse out of a sow's ear. Send SAE for full specs.

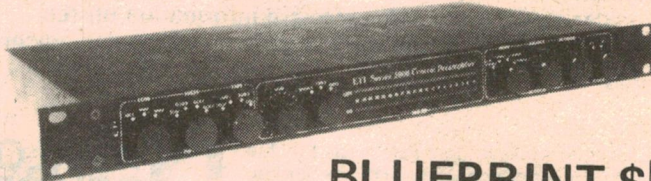

BLUEPRINT \$299

★ SPECIFICATIONS

Frequency Response	High level input: 15Hz-130kHz, +0 - 1dB Low level input: conforms to RIAA equalisation +0.2dB (see detail on Phono spec.) 1kHz 0.003% on all inputs (limit of resolution on measuring equipment due to noise limitation)
Distortion	High level input, master full, with respect to 300mV input signal at full output (1.2V) 92dB flat, 100dB A-weighted
S/N noise	MM input, master full, with respect to full output (1.2V) at 5mV input, 500 ohm source resistance connected 86dB flat, 92dB A-weighted MC input, master full, with respect to full output (1.2V) at 280mV input signal 71dB flat, 75dB A-weighted
Gain	24
Frequency Response	7Hz - 135kHz, +0 - 1dB
Total Harmonic Distortion	0.003%, 1kHz, 30mV input
Noise	Total equivalent input noise 83mV flat, input shorted 42mV 'A', input shorted 56mV flat, after RIAA E.Q. input shorted 34mV 'A', after RIAA E.Q. input shorted
Total Harmonic Distortion	0.001%, 1kHz, 10mV RMS input
Noise	28dB with respect to 5mV RMS input signal, i.e. 135mV RMS Total equivalent input noise, 122mV 'A', input shorted, 216mV flat, input shorted
S/N ratio	Flat 1mV 5mV 10mV 73dB 87dB 93dB A-weighted 78dB 92dB 98dB

We regret to advise that we have been forced to increase our prices due to sales tax & component cost increases.

SERIES COMPONENT

OCTAVE GRAPHIC EQUALISER — BRILLIANT!!

8 CHANNEL MIXER KIT

FROM \$495

The Jaycar 8002 Mixer was originally conceived to be the successor to the very popular ET1414 Master Mixer. The 414 was basically configured as a 'stage' mixer and suffered from a number of severe technical limitations — notably poor signal-to-noise figures. Enormous advances in Audio IC's have occurred since the 414 was designed. Jaycar engineers have taken advantage of this. The incredibly low noise and distortion figures of the 8002 are a testimony to the sound basic design of the mixer coupled with the performance capability of these IC's. Whilst the 8002 is the ideal 8 channel compact stage mixer, other applications have been kept in mind. AS A "STUDIO" MIXER. The prime requirement of a studio mixer is that it must be quiet — i.e. have good S/N. Due to the fact that the "miracle" 5534 IC's are used in the 8002 studio applications are entirely feasible. In addition to this, metal film resistors are used in critical signal areas. AS A DISCO MIXER. The balanced input feature of the 8002 is not really necessary for disco use. This section can easily be bypassed with either a moving magnet (Dynamic Cartridge) preamp, or a moving coil preamp. The sensible format of the 8002 and tremendous equalization facilities should make this mixer popular for disco use.

- Balanced (600 Ohm) Mic. Inputs/Line Inputs.
- Cannon Connectors included in the price.
- Bass, Mid & Treble Equalization on each Input.
- "Effects" (i.e. Echo etc.) capability.
- Foldback and Stereo Pan on ALL 8 Inputs.
- 60mm Slide Faders used throughout.
- 19" Rack Mount capability (or Console Mount).
- Professional Black Front Panel with Format borders & multi-coloured knobs to assist function identification.
- VU Metering.

Send SAE for full details + details on use as stage mixer

MASSIVE BREAKTHROUGH! CAR COMPUTER BELOW \$200

COMPLETELY BUILT AND TESTED — NOT A KIT!!

JANUARY SPECIAL
Because January is a "slow" month we've slashed \$20 off the very popular "Voyager" Car Computer! Hurry! This month only!

AS REVIEWED IN EA OCT. 1982
and ETI NOV. 1982



CONTAINS EQUIVALENT OF THOUSANDS OF TRANSISTORS
— USES MASSIVE CUSTOM LSI CHIP TO ACHIEVE LOW PRICE

IDEAL RALLY COMPUTER!

only \$179 complete
save \$20

FEATURES

- INSTANT FUEL CONSUMPTION IN LITRES/100KM AND MPG!! (MOST OTHERS HAVE ONLY ONE OF THE ABOVE) JUST SWITCH FROM ONE TO THE OTHER AS YOU DRIVE ALONG.
- INSTANT SPEED, TIME AND OTHER FUEL DATA.
- VISUAL AND AUDIBLE EXCESS SPEED ALARM.

INSTALLATION

The "Voyager" comes complete with an unbelievable array of mounting configurations, on dash, under dash or stalk mount. ALL installation hardware is supplied (even a roll of insulation tape!) as well, of course, as the speed and fuel sensors. A lavishly illustrated installation manual is provided as well as a comprehensive operators manual.

Jaycar NUMBER 1 FOR KITS

125 York Street, Sydney 2000
Phone: 264 6688 Telex: 72293

"Nevilles Corner"
Cnr. Carlingford & Pennant Hills Road,
Carlingford
Phone: 872 4422

Mail Orders To: Box K-39 Haymarket
Sydney 2000

POST AND PACKING CHARGES
\$5 \$9.99 (\$1.20) \$10 \$24.99 (\$2.40)
\$25 \$49.99 (\$3.50) \$50 \$99.99 (\$4.60)
\$100 up (\$6.20)

NEW SHOP HOURS
Mon-Fri 8.30 to 5.30pm
Sat 8.30 to 12.00pm
Thurs night to 8.30pm


MAIL ORDER BY
BANKCARD VIA
YOUR PHONE



'super siren'

Incredible CMOS circuit drives a Motorola piezo horn (KSN 1038A) to achieve extremely high sound pressure levels. Makes a great alarm and only draws — would you believe — 5mA average! Runs for ages on a 9V battery. You can get the electronics including the PCB for only \$5.00. KSN1038A only \$17 extra.

Ref: EA 11/82 FROM \$5.00




We will not cut costs by accepting inferior quality components.

YOU CAN PHONE CARLINGFORD ON 872 4444 AS WELL!

ELECTRONICS Australia, January, 1983

Shortwave Scene

by Arthur Cushen, MBE



Bonaire — tiny island with a big voice

The small island of Bonaire in the West Indies has an area of just 286 square kilometres yet is the base for two powerful transmitter sites, with a total power output of 1400kW.

The tiny island of Bonaire has the powerful transmitting plants of Radio Nederland and Trans World Radio, and must rank as one of the smallest islands with a powerful voice. Gospel station Trans World Radio has other transmitters in Monaco, Swaziland, Guam and Sri Lanka which make up a world-wide network and the Bonaire transmitter mainly covers Latin America, but programs are also broadcast to North America, Europe and the Far East. Both mediumwave and shortwave transmitters are used with a 500kW mediumwave transmitter on 800kHz often heard in the South Pacific and two shortwave transmitters, one of 250kW and the other of 50kW. Broadcasts are in Spanish, Portuguese and English and as well as programs being produced on Bonaire recording studios have been set up in several countries. Bonaire is governed by Holland and has a population of around 9000.

Both Trans World Radio and Radio Nederland generate their own power from diesel generating plants. The studios of both Trans World Radio and Radio Nederland are located close to each other though the transmitting plants are some distance away. Radio Nederland has automatic switching

devices for their antennas and operates two transmitters at 300kW each. The main difference between the two stations is that Trans World Radio originates its programs from Bonaire, while Radio Nederland is only a relay station and receives its programs via a satellite from the studios in Hilversum, Holland.

Radio Nederland uses its Bonaire relay base for broadcasts to Australia in Dutch at 0630-0720UTC on 9630 and 9715kHz, and 0830-0920UTC on 9770kHz. Two transmissions in English are broadcast at 0730-0820UTC on 9715 and 9770kHz, and 0830-0920UTC on 9715kHz. A broadcast in Dutch at 0930-1030UTC is carried on 6020 and 9510kHz.

OUTSTANDING VERIFICATIONS

The award for the best verification for the year to a member of the New Zealand Radio DX League was made at the League's Annual Meeting in Oamaru recently. A verification from Tony Marr of Wellington of the Falkland Islands Broadcasting Service 2370kHz 1kW was judged the best shortwave entry. This was a topical verification as the station was heard the night of the Argentine invasion and was the first reported reception of the Falkland Islands in Australia or New Zealand. The mediumwave award went to Michael Smith of Opunake NZ with a verification from KNOM Nome Alaska 780kHz using 5kW. The League inter-Branch competitions were all won by the Southland Branch.

CLEARING A FREQUENCY

For more than 30 years the BBC World Service has broadcast on 9410kHz using the call sign GRI, allocated by the British Post Office. In late September last year listeners in Australia and New Zealand found the frequency blocked by a new facsimile transmission, operated by the New Zealand Meteorological Service in Auckland NZ. The interference was widespread and recordings of the degree of interference were submitted at the request of the BBC to London.

It is interesting to note that the New Zealand Post Office which assigned the frequency stated that the channel was in the section for fixed services, but for many years the section between 9400 and 9500 has been used by international radio stations. After publicity within New Zealand, both on radio and television, and complaints to the Minister of Meteorological Services the Post Office reassigned the meteorological station which was transmitting weather maps to coastal shipping and allocated the frequency of 9458kHz for this service.

Following telephone advice from the Ministry in Wellington that the frequency had been cleared the BBC engineers in London were informed, and in their telegram of thanks they stated "Confident your initial vigilance helped speedily resolve problem".

NEW FREQUENCIES

AUSTRIA: Vienna is using some new frequencies in their transmission to Australia, including 0400-0600UTC on 17745kHz; 0700-0900UTC on 17740kHz; 1000-1200UTC on 17810 and 21490kHz. English is broadcast 0430-0500 and 0830-0900UTC.

FRANCE: Radio France International has a new daily transmission which opens at 2200UTC on 9790, 11955, 11970 and 11995kHz. The first hour is in French and at 2300UTC identification in Portuguese and Spanish is given followed by a program in Spanish.

ITALY: Rome Radio has made a frequency change for the Italian transmission at 2050-2130UTC. The new channel is 7235kHz which replaces 15330kHz while 9710 and 11800kHz also carry this broadcast. Rome also transmits to Australia 0830-0930UTC on 9585, 11810, 15330, 17780 and 21615kHz.

SPAIN: The Spanish National radio at Madrid is using the new frequency of 15375kHz for two transmissions in English 2010-2055 and 2110-2155UTC.

Notes from readers should be sent to Arthur Cushen, 212 Earn Street, Invercargill NZ. All times are UTC (GMT). Add eight hours for WAST, 10 hours for EAST and 12 hours for NZT. In areas observing daylight time, add a further hour.

DO YOU WANT TO BE A RADIO AMATEUR?

The Wireless Institute of Australia, established in 1910 to further the interests of Amateur Radio, conducts a Correspondence Course for the A.O.C.P. and L.A.O.C.P. Examinations conducted by Telecom. Throughout the Course, your papers are checked and commented upon to lead you to a successful conclusion.

For further information, write to

**THE COURSE SUPERVISOR
W.I.A. (N.S.W. DIVISION)**

P.O. BOX 1066
PARRAMATTA, N.S.W. 2150.

DICK SMITH HAS A GREAT DEAL ON YAESU!



look at these
DICK SMITH 'Invisible Extras'

We honour Yaesu's 12 month guarantee: beware of others who may only offer you a 90 day or no warranty.



We have the largest service centre to back that guarantee: if anything does go wrong with your Yaesu, we can fix it fastest!



We have the largest range and consistently lowest prices.




Dick Smith Electronics: Australia's largest supplier and Yaesu factory approved distributor and service centre.



Dick Smith Electronics have over 33 stores throughout Australia (with more to come!) plus over 200 approved re-sellers. You're never far from friendly help and service!



Dick Smith Ham Shacks are located in the stores listed to the right. You'll find a licenced amateur at each shack - someone who can talk your language and give you any help you need. (Amateur items also available at other Dick Smith stores).

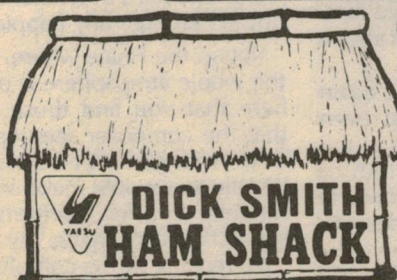

SAVE \$96.00



FT707

The FT707 is a full power all HF band (including WARC) multi-mode transceiver not much bigger than an average 2 metre mobile! And you get digital display as well. LED S/power meter, push button operation ... all the things the amateur needs for safe and yet reliable mobile operation. But it's more than that: team it up with a FP-707 supply and it's a superb base station, too. Cat D-2869

WAS \$795

NOW ONLY \$699.00

BONUS MIC WORTH \$29.95



The brilliant FT ONE

LOOK AT THESE FEATURES:

All mode - even FM (optional extra). All band - it receives from 150kHz to 30MHz continuous, with resolution down to 10Hz and it includes all WARC bands. All micro-processor controlled. All area operation: run it from 100-120 or 200-240V AC in the shack, or 13.5V DC when mobile! All solid state (of course) and all performance - with better than 0.3uV sensitivity and more than 100W output (SSB). Cat D-2852

Includes free mic worth \$29.95 **ONLY \$1995**

The Go Anywhere FT290R



The brilliant Yaesu FT-290R is a portable or mobile set. Fully microprocessor controlled offering up to 10 channel memory, scanning, LCD display, high or low power operation, all modes (yes, CW SSB & FM) plus full 144-148 MHz band coverage. All this in a transceiver which can be operated both portable (from internal batteries & whip antenna) or mobile (ext. antenna & power sockets fitted). Cat D-2885

NEW ACCESSORIES

CASE Cat D-2910 \$7.50
Flexi Ant Cat D-2912 \$9.50
MMB11-290 (Mobile Mounting Bracket) Cat D-2911 \$39.50

ONLY \$349

NEW NEW NEW NOVICE AMATEUR RADIO COURSE

All you need to get a Novice license - covers theory, Morse (tape), exam forms, etc. Cat D-7107 **\$16.95**

NEW NEW NEW AMATEUR RADIO LOG PROGRAMME

All the information at your fingertips. Disk & manual, suits System 80/TRS80 LII. Cat X-3774 **\$39.50**

LOW PRICES PLUS EXCLUSIVE DICK SMITH 'INVISIBLE EXTRAS'



NEW FT 102

New from Yaesu & Dick Smith - the fabulous FT102. 240W all mode optional transceiver, push button controls, dual meters, digital display and much more. A superb base station transceiver with 3x6146B's in the final. Cat D-2880

ONLY \$1225

SUPER COMPACT! SUPER VALUE!

30W 2M Linear Amp



This is an all mode, high efficiency Linear amp for 2 meters. 30 watts output - 13.8V DC supply make it perfect for mobile use. Dual time constant for SSB or FM. Reverse polarity protection, works well with any 2M transceiver with up to 3 watts out. Cat D-2546

ONLY \$89.50

NEW

NOVICE ALL MODE TRANSCEIVER



Model SS105 S Fantastic for the Novice - 10W all band transceiver (100W with optional amp), operates from 12V DC so its great mobile or base. Weighs only 5kg and is a tiny 124 x 178 x 272mm. Even goes FM with optional FM unit! And look at the low, low price ... Cat D-2900

GREAT VALUE \$549

Sydney 125 York St. 290 3377 • Sydney 6 Bridge St. 27 5051
• Gore Hill 439 5311 • Melbourne 399 Lonsdale St. 67 9834
• Springvale Dandenong Rd. 547 0522 • Richmond 656 Bridge Rd.
428 1614 Brisbane: Buranda 166 Logan Rd. 391 6233 Chermside
842 Gympie Rd. 596255 • Perth 414 William St. 328 6944

bankcard welcome here
Terms available to approved applicants through...



A407CT

\$50,000 IN PRIZES TO BE WON. SEE YOUR NEAREST DICK SMITH STORE.



REVIEWS OF RECENT

Records & Tapes

CLASSICAL • POPULAR • SPECIAL INTEREST

BRAHMS' SERENADE: Haitink lends it "symphonic stature"

BRAHMS — Serenade No. 1 in D. Concertgebouw Orchestra of Amsterdam conducted by Bernard Haitink. Philips De Luxe analog Stereo 9500 322.


Despite Brahms' present-day popularity his Serenades are seldom heard in the concert hall. Yet they contain much attractive music. I think this is largely because Brahms couldn't make up his mind about the form he was seeking. Sometimes a movement sounds as if it came from a symphony. Others have Brahms trying hard to get back to the 18th century form of Serenade or Cassation, which was a work written for a chamber combinations.

Brahms, of course, until comparatively late in life, was eager to write a symphony yet feared to do so. This, by the way, with the great First Piano Concerto behind him. The Serenade shows his hesitations, especially under Haitink's percipient direction. It was 20 years after all this before Brahms finally embarked on the First Symphony.

It is in six movements, all unnamed except for such directions to the executant as *allegro molto* and so on. The first and third are movements already on the way to a symphony, the fourth tries to return to the 18th century. Haitink, however, seeks to unify the style by lending it symphonic stature, very satisfactorily in my opinion.

His tempos are measured, his phrasing broad, his treatment being particularly effective in the third (adagio) movement. The first movement opens with a rustic sounding tune that reminds one vaguely of Beethoven's Pastoral Symphony. The second has just a familiar feminine Brahmsian tune. There are many hints of later works in the first movement.

Throughout the whole work the scoring varies between Brahms at his most grumous and some quite delightful chamber music sound. All this is emphasised by the superb quality of Philips analog sound which has a dynamic range as wide as a well-judged digital recording.



ding. It also serves to show how Haitink preserves the Brahmsian style in the lightest, even skittish — yes skittish — passages.

The second scherzo starts a little seriously for a movement so described but is followed by a smooth melody which, despite macho manifestations elsewhere, still retains faint femininity.

The adagio is marked "non troppo", a fact that is carefully observed by Haitink, enabling him to preserve the work's not too evident tension. It makes a grand contrast to the sensitively played Second Scherzo.

The Concertgebouw is in fine form under Haitink. All play superbly but I must reserve special praise for the clarity and "waldhorn" quality of tone of the solo horn and to a solo flautist who in important passages adds an extra elegance to the whole exercise. (J.R.)

SHOSTAKOVITCH SYMPHONY: "Recommended"

SHOSTAKOVITCH — Symphony No. 10 in E Minor. Berlin Philharmonic Orchestra conducted by Herbert von Karajan. Digital disc 2532 030.

There is something good to be said about all the previous recordings of this symphony. As far back as 1955 Mitropoulos and the New York Philharmonic issued a splendidly vital version, still worth a play, even though its sound cannot compare with more recent versions. Then there was a really great Karajan version with the Berlin Philharmonic 14 years later. A great reading this, truly in the grand manner.

In October 1977 the always reliable Haitink and the London Philharmonic recorded the work. It lacked the thrust and spaciousness of the Karajan but had splendid recorded sound. There were others somewhat less impressive between these but I have chosen the above for their general excellence.

Now comes another Karajan, again with the Berlin Philharmonic, but even more overwhelming than his first.

Many musicians consider the 10th to be Shostakovich's finest symphony, in which he reveals what might be describ-

ed as the tragedy of the Russian soul — apparent in Russia's great literature as well as its music — a mixture of gloom, violence, rough play, graceful dancing revealed eloquently by such artists as Tolstoy and Moussorskys.

Karajan, of course, is not Russian but he might easily pass for one in his understanding of Russian characteristics. This new version differs only occasionally from the 1955 but has the advantage of digital recording. His reading sweeps over just as wide a spectrum and follows all the great virtues listed above.

The work is dominated by that important Russian characteristic — tragic at its gayest. No one listening to only the first three movements would disagree. The scherzo is brutal in every sense of the word. The third movement mediates but doesn't emerge any happier.

Not so the Finale where, for a change, the whole atmosphere is optimistic. It is here that you find those larkin tunes that the composer seemed to have put down with glee. Yet it is not quite as optimistic as it would make out if you listen carefully to a few performances. And I suspect Karajan shares my opinion.


His reading shows complete awareness of the work's paradoxes and, under his

Reviews in this section are by Julian Russell (J.R.), Neville Williams (W.N.W.), Leo Simpson (L.D.S.), Norman Marks (N.J.M.), Greg Swain (G.S.), and Danny Hooper (D.H.).

A thorough check checkout for your hifi system

TELARC'S NEW "OMNIDISC"

With this new two-record set and instruction book from Telarc, you can pinpoint suspect areas in your hifi record playing system and hopefully achieve a higher standard of performance.

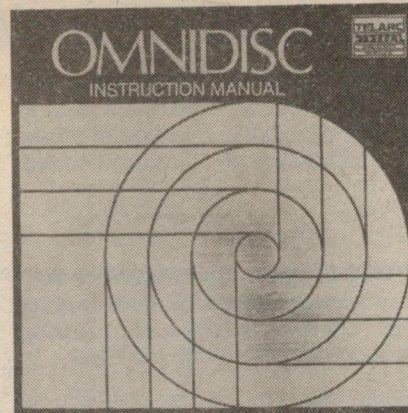

Over the years, quite a few phono disc manufacturers have issued evaluation or test recordings of one type or another — some intended for the home situation, some for laboratory use, and still others with a dual purpose in view. However, amongst those which have been aimed, in whole or in part, at the home hifi buff, it is doubtful whether any have been more ambitious in their presentation than this new "Omnidisc" from Telarc.

It comes as a boxed set containing two discs, marked as "Imported pressings" for the American home market, plus a 12-page album-size instruction manual. Well set out and illustrated, the manual explains the nature and purpose of each evaluation procedure, mixing it with commonsense advice. The adjective "commonsense" arises from the fact that, while the procedures envisage the ideal, they also accept the fact that, in practice, even hifi buffs may have to settle for something less.

Side 1 contains no ordinary tracks but presents a mirror-like surface into which is embossed a calibrated overhang scale centred on the spindle. There is also a calibrated radius line, flanked by a double row of right-angle reference lines. These allow the stylus overhang to be checked accurately, where the figure has been specified and also to determine, by inspection, the two "null" radii where zero tracking error occurs. Alternatively, the user may choose to set up for the recommended null radii (66 and 121 mm) and read off the overhang which results.

Also, at this stage, aided by the plain mirror surface of side 1, the user can judge the azimuth (frontal angle) of the stylus cantilever, whether the appropriate surfaces of cartridge and arm are parallel with the record surface and whether, in situ on the shelf or benchtop, the surface of the turntable and deck is exactly level.

Having checked out the geometry of the phono deck, whether conventional or straight line tracking, attention moves to side 2, which is tightly packed with tracks, mainly pink noise or 1/3-octave pink noise. Subjective tests include: channel verification and separation; tracking and anti-skating force; vertical tracking angle; turntable noise,

acoustic isolation, cartridge microphonics; cartridge phasing; cartridge and tone-arm resonance effects; wow and flutter; 1000Hz reference recording level.

The remaining 30 tracks on side 2 are 1/2 octave pink noise segments covering from 20Hz to 20kHz, intended as instrumentation signals for system and room equalisation. While proper advantage of these demands access to appropriate instruments, some enlightening — and disturbing — conclusions can sometimes be drawn by simply listening from various positions in the room.

Assuming that the system has been checked systematically through the procedures outlined to this point, the next step is to see how it performs on selected musical passages, arranged for the purpose on side 3. Each passage is recorded first at normal level (ref. 5cm/sec) then repeated +2dB, +4dB and +6dB, the last named at a relative reference of 10cm/sec. All are from the Telarc library: Beethoven — Symphony No 5; Orff — Carmina Burana; Tchaikovsky — 1812 Overture; Chopin — Tarantelle in A-flat Major; Stravinsky — The Rite of Spring.

At this stage, the user is subjected to a thorough revision and check-out: are all controls set at "flat"? Are all leads and connections in good shape? Re-check left and right channel identity, balance and phasing. Have another look at your loudspeaker placing . . . and so on.

This is in preparation for a serious listening test on side 4, with the emphasis both on sound quality and on stereo imaging. Hopefully, your final judgment will be that all the foregoing check and adjustment routines have paid off. The selections: Britten: Fugue From Young Person's Guide to the Orchestra. The Beach Boys: Good Vibrations.

SUMMARY: It adds up to a thorough and worthwhile checkout, particularly of phasing right through to absolute phasing, tracking weight and bias, and a tortuous two-tone test. And, if your system can cope with the 1812 cannon at +6dB, you can take it to the top of the class. The Telarc Omnidisc set is available through specialist hifi stores or direct from PC Stereo, PO Box 272, Mt Gravatt, Qld 4122. Phone (07) 343 1612. (W.N.W.)

2FC, 2BL, 2GB, 2UE, 2KY, 2UW, 2CH 2WS, 2SM and 2EA have a major problem:

Whilst AM stations go to great lengths to ensure that the signal that they transmit is of the highest possible quality the problem is, that most manufacturers produce tuners that do the reverse!

AM broadcasts sound great!

The AM section in a typical FM/AM tuner has a frequency response of about 40-2,000Hz. This makes it OK for news and information but music sounds BLECCH.

Audiosound AM tuners cover 20Hz-13kHz-3dB. They have a distortion free sound quality that subjectively sounds like FM with the occasional crackle. And they have a stereo simulator circuit. Why put up with muddy AM quality when the rest of your system sounds great?

Remember the first time?

Remember when you replaced your tin boxes with true Hi-Fi speakers? An Audiosound tuner will make the same

quantum jump — you can actually enjoy AM broadcasting for it's sound quality alone. If your dealer doesn't have these superb tuners, phone Audiosound on 938 2068. Audiosound have been transforming the quality of AM broadcasts since 1970. An Audiosound tuner really does *make a difference*. **AM101 \$299***

audiosound

Contractors to the Australian Broadcasting Commission

RECORDS & TAPES — continued

direction, the Berlin Philharmonic has never played better. Indeed, it is hard to think of their equal in this type of music. Most enthusiastically recommended. (J.R.)

☆ ☆ ☆

RACHMANINOFF — The Complete Solo Piano Music played by Ruth Laredo. CBS Stereo Masterwork, Analog Discs, 79700. Seven Boxed Discs.

Despite my unswerving diligence in listening to 14 sides of Rachmaninoff's complete piano music my review, promised in the last issue, must alas be a cursory one. This is because any chance of mentioning separately the composer's torrential output in this field would be impossible in these days of newsprint economy.

I must confess that there seemed no end to the steady output of Preludes, Studies, Variations, Fantasy Pieces, Variations, Transcriptions and other small forms too plentiful to mention. And bear in mind that these seven excellently played discs do not include those pieces with orchestral accompaniment — the concertos, Paganini Variations and so on.

Yet this whole exercise reveals Rachmaninoff as a superb technician as a pianist, even if the quality of some of the compositions doesn't quite measure up to the same high standard. This is not to suggest that those without much merit are numerous. On the contrary. The range of the composer's imagination was immense.

There is a 16 page guide to lead you through this forest of sound.

Rachmaninoff must have been an extraordinarily industrious fellow because, in addition to his composing, he still found time to give piano recitals and performances of his orchestral pieces.

What is it possible to say about the pianist, Ruth Laredo, in these circumstances except that hers was a heroic effort well worth the work that went into it. No matter where you put the stylus on the 14 sides in this set, you will seldom be disappointed with what you hear.

In an effort of this dimension, forced into cramped space, this is to be taken as high praise.

Another tip from Shostakovich junior when he was recently in Australia. The composer of these piano works pronounced his name Rakmaneevoff with the accent on the penultimate syllable. But how many times will you be contradicted if you use it? (J.R.)

☆ ☆ ☆

DAVE GRUSIN AND THE GRP ALL STARS, Live In Japan. Arista L 37682. Festival Release.

If you like your jazz solid with an Oriental touch, give this record an audition. Recorded before a concert audience, the record has the ambience one would expect, with plenty of applause, as well as very good sound quality.

Side one has three long tracks: Modaji — Trade Winds — Shamballa; side two has: Friends — Strangers — Don And Dave — Captain Caribe, together with an introduction for the band, which include Don Grusin, Buddy Williams and Marcus Miller and five other American musicians, with a large Japanese backing group, mainly on strings.

Dave Grusin, who has chalked up a long career in film music, features here on piano. (N.J.M.)

☆ ☆ ☆

MUSIC BY CANDLELIGHT: Gheorghe Zamfir. Philips 9120 309. Released by World Record Club.

Gheorghe Zamfir first came to widespread notice with the haunting theme for the Australian movie "Picnic At Hanging Rock", and his playing of the pan flute, an instrument whose origins are lost in antiquity. The Macquarie dictionary describes it as "a primitive wind instrument consisting of a series of pipes of graduated length, the notes being produced by blowing across the upper ends."

However you regard it, the instrument can produce some intriguing sounds, especially where it is backed by the lush, Mantovani style orchestra of Harry van Hoof in a dozen well known tunes, both old and new. These are:

She — Laryssa — Theme From Limelight — Elsha — Run to Me — Don't Cry For Me Argentina — Floral Dance Black Rose —

Remember the Boomerang mouth organ?

P. C. SPOUSE. Mouth Organ Champion of Australia. Re-issue of original recordings 1926-1936. Mono, RG-2. (From Bushlark Records, PO Box 465, Broadway, NSW 2007. \$11.00 plus \$3.00 P&P).

Here's a mix of nostalgia and history, if ever there was one — compiled by the same Ray Grieve who resurrected the old cylinder recordings discussed on page 112 of our March 1982 issue. This is a much more meaningful effort, however.

Back in the '20s and '30s, the word "Boomerang" had two main connotations: an Aboriginal throwing stick and a brand of mouth organ marketed by J. Albert & Son Pty Ltd of Sydney. Who in the country, didn't own one at one time or another? Or didn't struggle bravely through "Swanee River" in the fond hope of better things?

The reigning mouth organ champion of Australia, in those days, was Percival C. Spouse, a distinction earned as winner of Albert's Boomerang Mouth Organ Championship in the huge Coliseum Hall, Ballarat, October 12, 1925.

He won further championships during the following years but, more importantly, on October 21, 1926, he made his first recording in the then new Columbia Graphophone studios in Homebush, Sydney. This was one week after they opened, the third artist to be recorded and one of the first-ever electrical recordings to be made in Australia.

In the following 10 years he made 10 78rpm recordings on the Regal and Regal-Zonophone labels, most of them solos. The 20 tracks on this 12in album have been transcribed from those



records, partly in collaboration with the National Library in Canberra.

Listening to them, their shellac-based ancestry is unmistakable, but only as a background. The recordings probably sound a lot better today than ever they did with the mechanical phonographs or blunderbuss pickups of the era.

And how would P. C. Spouse compare with say . . . Larry Adler? How does chalk compare with cheese?

Larry Adler was a trained musician, who worked with trained musicians and the best chromatic harmonicas that money could buy.

P. C. Spouse was a part-time solo entertainer who, for the most part, stuck to the bushman's friend, the basic single-row, 20-note, single-key Boomerang. And, listening to some of the old evergreens, I doubt that anyone ever could, or ever did, get as much out of them as Percival C. Spouse.

Don't buy this album expecting a musical feast. It's essentially a carefully produced and well documented piece of Australian folk musical history, poised halfway between the city and the bush! (W.N.W.)

ELLISTRONICS PTY. LTD.

289 LATROBE ST MELBOURNE 3000

PHONE (03) 602 3499

TELEX AA37758



STARWRITER F-10
40 CPS Daisy Wheel \$1600
PRO-WRITER 8510A
120 CPS Dot Matrix Parallel \$795


ALSO STAR PRINTER



ONLY
\$395.00

MITSUBISHI

DISC DRIVE



M2896-63

- SLIMLINE 8"
- DOUBLE SIDED, DOUBLE DENS
- NO AC POWER REQUIRED
- 1.6 M BYTES, UNFORMATED
- 77 TRACK/SIDE

*** \$495.00**

MODEL M4854

- SLIMLINE 5 1/4"
- DOUBLE SIDED, DOUBLE DENS
- 96 TRACK/INCH
- 9261 BITS/INCH
- 1.6 M BYTES UNFORMATED
- 3MS TRACK TO TRACK
- 77 TRACK SIDE


*** \$385.00**

MEMORY SPECIALS

.6116P-3	120NS	\$ 5.00
.2716	450NS	\$ 2.95
.2732	450NS	\$ 4.50
.2764	250NS	\$10.50
.4116	150NS	\$ 1.10
.2114	200NS	\$ 1.20
.4164	200NS CERAMIC	\$ 5.50
.Z80 CPU		\$ 3.50
.Z80A CPU		\$ 3.75
.Z80 CTC		\$ 3.20
.Z80A CTC		\$ 3.80
.Z80 P10		\$ 2.95
.Z80A P10		\$ 3.45
.Z80 S10		\$ 8.30
.Z80A S10		\$10.35

MPI-B51

DISC DRIVE
COMPLETE WITH
POWER SUPPLY & CASE




- SUIT SYSTEM 80
- TRS 80 ETC.

OUR PRICE

\$332.00

SUPER LOW PRICES on Cannon



DB25P

\$1.75

DB25S

\$2.45

5 1/4" SOFT SECTORED

- S-SIDE DOUBLE DENSITY \$32.92/10
- D-SIDE DOUBLE DENSITY \$49.00/10

8" SOFT SECTORED

- S-SIDED DOUBLE DENSITY \$34.65/10
- D-SIDED DOUBLE DENSITY \$52.00/10



6800	\$2.76
6802	\$3.80
6809	\$8.70
6821	\$1.65
6840	\$3.22
6845	\$8.50
6850	\$1.45
8212	\$1.19
8216	\$1.05
8224	\$1.35
8255	\$2.22
8155	\$3.80
LM301	.22
LM308	.29
LM324	.37
LM339	.38
LM555	.20
LM741	.23
LM340T5	.36
LM340T12	.36
LM317T	.62
LM340K5	.89
LM340K12	.99
78H05K	\$3.98
LM317K	\$1.23

4011	.14
4016	.24
4017	.44
4023	.16
4028	.45
4040	.52
4051	.49
4066	.28
4081	.16
4511	.49
4520	.56
74L500	.13
74L504	.14
74L514	.19
74L530	.16
74L532	.13
74L547	.34
74L590	.26
74L5161	.33
74L5240	.49
74L5244	.43
74L5245	.57
74L5366	.28
74L5367	.29

BD139	.24	BU326	1.20	RED LED	.05
BD140	.24	BUX80	2.10	GRN LED	.09
MJ802	2.50	BC547-8-9	.05	YELL LED	.09
2N3055	.56	BC557-8-9	.05	FND 500	.79
BU126	1.25	BC327-8	.05	MAN 74A	.68



ALL PRICES PLUS 20% TAX

TRANSISTORS PLUS 32.5% TAX

POST \$2 HEAVY ITEMS EXTRA

* 100K OHMS/Volt DC ranges * 8.5 UA movement
* Fuse and diode movement protected
* Inbuilt oscillator for capacitance measurement.
RANGES: DCV 250mV, 2.5V, 10V, 50V,
250V, 1000V, ACV 5V, 10V, 50V, 250V,
1000V (10K/V) DCA 10UA, 2.5mA, 25mA,
500mA, 10A ACA 10A Resistance x1 x10
x1K, x10K Transistors NPN/PNP HFE 0-1000
ICO 0.50UA Capacitors 50PF/3UF, .01UF,
50UF.

RECORDS & TAPES — CONTINUED

Theme From Summer Of 42 — Meditation From Thais — Bilitis — Adagio.

The style of playing makes for a quiet, reflective listening mood; more than anything else, a record to enjoy on a quiet evening at home. (N.J.M.)

★ ★ ★

VIRGINIA ASTLEY, A Bao a Qu. RCA Victor EP, 45rpm TEP-0374.

I must confess to some surprise when this disc came to hand from RCA. Although far from being a pop release, it is in the 12in EP format, with four tracks

and a total playing time of just over 12 minutes. More than that, the jacket notes are very sparse and not at all easy to read.

However, RCA established for me that Virginia Ashley trained at the Guildhall School of Music, and now sings, composes, plays flute and piano and has a penchant for electronic music.

Early on, she earned a living by busking but, more recently, has been an arranger and supporting artist for Why-Fi Records.

The tracks on this new RCA record are

"We Will Meet Again", with words taken from an English translation of Mahler's *Kinderotenlieder*; "Arctic Death" and "Angels Crying" are a complete change in style, with a strong overtone of electronic music; "Sanctus" is impressionistic vocal, in keeping with the title.

The recorded sound is clean enough and pleasant enough but, having in mind the effort needed to produce the record, it would have made so much more sense to prepare a few notes explaining what it's all about! (W.N.W.)

★ ★ ★

VAL SINGS BING. Val Doonican, with orchestra and chorus. Stereo, RCA VAL1-0375.

I know it's a matter of taste, but what an utterly pleasant record this is. Ot, at least, it will be to the millions who bought Bing Crosby's records, and the countless others who have enjoyed watching and listening to Val Doonican.

I gather that the inspiration for the record was a session filmed in 1981 by BBC television, in which Val Doonican paid tribute to Bing Crosby. Of that session Vic Damone said "I couldn't believe anyone could do a 45-minute TV show live on air, without even referring to any

Choral — devotional

SHEEP MAY SAFELY GRAZE. The Pendyrus Male Choir, conducted by Glynne Jones. Organist: Huw Tregelles Williams. Stereo, Word WST-9603. From Word Records Aust, 18-26 Canterbury Rd, Heathmont, Vic 3135. Phone (03) 729 3777.

You will certainly know some of the selections on this album but, even if others are unfamiliar, they will not diminish your enjoyment of the program, if you are fond of the sound of a Welsh male choir.


The Pendyrus Choir was founded just on 60 years ago, drawing its members mainly from miners in the Rhondda Valley in South Wales. Nowadays, its members come from all walks of life in South-east Wales.

Their repertoire is as wide as their membership, ranging from 16th century Italian School to contemporary composers, and taking in operatic choruses and traditional and folk music in many languages. They have toured nationally and internationally and featured, worldwide, on radio and television.

As depicted on the jacket, the choir represented here numbers about 90 members and, while I would hesitate to draw direct comparison, based on my memory of other recordings, I can say that they certainly don't come much better. The track titles are as follows:

The Lord's Prayer (Malotte); Sheep May Safely Graze (Bach); Steal Away (Traditional); O Father, Whose Almighty Power ("Judas Maccabaeus", Handel); Gwahoddiad (Hartsough); Sound An Alarm ("Judas Maccabaeus", Handel); Michael, Row The Boat Ashore (Georgia Sea Island Chant); Largo ("Xerxes", Handel); Deus Salutis (Jones); Kwmbayah (African Tune); Cym Rhondda (Hughes).

Made in the Rehearsal Hall of the Department of Music, in University College, Cardiff, the recording has magnificent support from the organ, played by Huw Tregelles Williams. The sound is

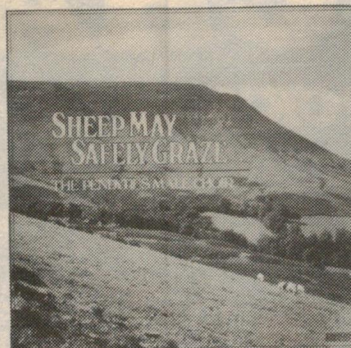

smooth and clean, with wide dynamic range, the one point of criticism being a touch of surface "prickle" in the quietest passages. But don't let this put you off, unless you're super-sensitive to such matters. (W.N.W.)

★ ★ ★


LIFT UP YOUR HEADS: Choir of The Temple Church, London. Organist and Choir master, Dr George Thalben Ball. World Record Club R 04999.

This record gives a sample of the evocative sound that a skilled church choir can produce under the direction of one of the world's most famous organists.

There are a dozen hymns, each followed by an organ voluntary based on the music: Jesu Lover Of My Soul — O Day Of God — Alleluia, Sing to Jesus — Help Us To Help Each Other — Loving Shepherd Of Thy Sheep — Thou Whose Almighty Word — Be Thou My Guardian — Lift Up Your Heads — What Sorrow Sore — Spirit Of Mercy — Blessed Jesus — Love Divine.

The record marks a fifty-year collaboration between HMV and the Temple Church and Dr Thalben Ball, dating back to 1927.

The jacket notes offer a brief history of each hymn and its author, together with a few notes on the history of hymn writing. The record captures the ambience of a big church very well, making it a useful addition to the collection of any lover of traditional church music. (N.J.M.)



kind of an idiot card" — but Val Doonican did it.

Because it is a tribute to Bing Crosby, the songs are Bing chestnuts, the mannerisms and the style are Bing's; but, even allowing for that, the vocal resemblance is uncanny. One might even go further and say that, for what differences there are, Doonican's voice control, pitch and phrasing is the better of the two. Here's the track list:

Pocketful of Dreams (medley) — True Love — Ac-cent-tchu-ate the Positive — Moonlight Becomes You — Irish Lullaby — Swinging on a Star — Mississippi Mud — That Sly Old Gentleman — May I — Beautiful Dreamer — Dear Hearts and Gentle People — Lazy Medley.

The sound on this local pressing is particularly clean and, if your loudspeakers have a good fundamental bass response, your room will throb to the leisurely tempo of the songs.

If you suffer from periods of tension, try listening to this one as a change from watching the goldfish in your aquarium! (W.N.W.)

**DICK'S DIRECT
IMPORT PRICES**

UNBELIEVABLE PRICE BREAKTHROUGH

\$248 PER CHANNEL

FOR DICK'S 40 CHANNEL CB



**FANTASTIC
VALUE!**

40Ch AM STALKER VIII

Don't take chances in buying CB radio... buy your CB from Dick Smith, Australia's CB expert!

The superb Stalker VIII CB features the new legal 40 channels, complete with microphone and mounting bracket.

Large LED channel readout, easy to use and has maximum legal output.

Cat. D-1447

DOC Approval No.
249A001

~~WAS
\$149~~

**SAVE
\$50!**

**NOW
ONLY**

\$99

Cat. D-1710

DOC Approval No.
249A006

40Ch AM/SSB

UNDER \$200! That's the DICK SMITH HORNET II

When you want the maximum range, maximum performance from a CB, you want the extra punch you can only get from SSB. With a massive 12W PEP (maximum legal power) and full 40 channel coverage, you're ready to talk to the world! The mighty Hornet II - exclusive to Dick Smith Electronics. Includes microphone, power cable, mounting bracket and instructions.

**SAVE
\$40^{50!}**

WAS

\$239.50

**NOW
ONLY**

\$199


TOP VALUE HAND HELD

Cat. D-1102

For the weekend boatmen who don't want the more expensive full power transceivers, but who still need that reassurance of having a safety transceiver on board. Three channels available, one fitted with 27.620MHz, the others left blank for your own choices. Crystals are reasonably priced and easy to fit. This set takes 8 'AA' pencil batteries or external 12V.

GREAT VALUE!

ONLY \$55⁰⁰

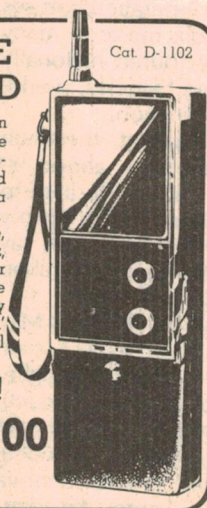

**FULL
RANGE OF
ACCESSORIES
AVAILABLE
AT LOW
DICK SMITH
PRICES!**

A234M2/HCE

1. 27MHz Gutter Grip

Simply clips onto the rain gutter of any vehicle. Features no hole installation and can be installed or removed without tools. Antenna has centre loading coil and ample coax is supplied. Cat. D-4411

\$25⁰⁰

2. 27MHz Magnet Base

Centre loaded stainless steel construction with heavy magnetic base. 16 feet of coax supplied, complete with PL259 plug. Ideal for 'instant' mobile use. Cat. D-4412

\$25⁰⁰

3. 1/4 Wave Whips

Your choice of stainless steel (D-4415) or fibreglass (D-4416). Each is approx. 2.75m long, ideal for marine or CB use. Cat. D-4415


\$17⁹⁵

\$22⁸⁰

4. 'Rubber Duck'

Indestructible and very flexible. Perfect for handheld sets. Only 300mm long, great replacement antenna! Cat. D-4623

\$9⁹⁵

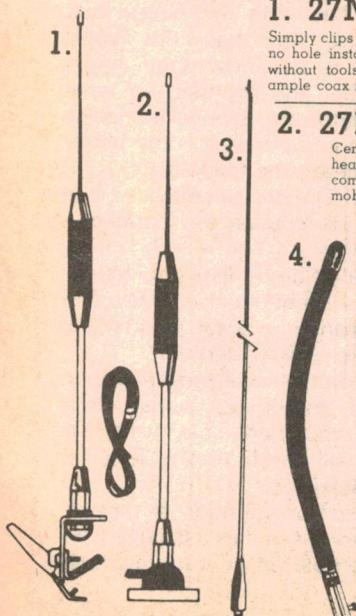

DICK SMITH Electronics

**See Pages 4-5
for address details**

**bankcard
welcome here**

Terms available to
approved applicants
through...



\$50,000 IN PRIZES TO BE WON IN THE MIGHTY MATCH-UP COMPETITION.

50 & 25 YEARS AGO

"Electronics Australia" is one of the longest running technical publications in the world. We started as "Wireless Weekly" in August 1922 and became "Radio and Hobbies in Australia" in April 1939. The title was changed to "Radio, Television and Hobbies" in February 1955 and finally, to "Electronics Australia" in April 1965. Below we feature some items from past issues.



January 1983

Radio Pirates: At Newcastle early last month 55 people were fined for having possessed unlicensed radio receivers. The total fines amounted to £140.

The local newspapers featured the names of those prosecuted and next day between 900 and 1000 Newcastle citizens took out licences.

These interesting facts are put forward in proof of the efficacy of the campaign against pirate listeners, which has been conducted in New South Wales.

In England the radio pirate is treated more harshly. Not only does he pay a heavy fine but he also forfeits his set. Such drastic measures are not necessary in Australia. But take a tip: if you haven't a licence get one immediately and avoid a fine.

☆ ☆ ☆

Class-B amplifiers: There is every indication that B class amplifiers have appeared to make a very long stay in the modern radio set. To the man brought up on a diet of sets with a maximum output power of about 2.5 watts, the idea of hitching a loudspeaker to 20 to 25 watts of undistorted output sounds something

like a nightmare. Visions are conjured up of splitting cones and bulging windows as the amplifier beefs out buckets of sound.

Do we want 20 watts of undistorted output? Of course we do. Not only do we get more power for our money with the new amplifier, but we make sure of enough reserve power to cater for the most severe audio peaks. One can not help but be impressed by a circuit which represents the most efficient audio amplifier of the moment, and will provide enough volume to make overloading at anything but the tremendous volume of which it is capable an impossibility.



January 1958

Canine Cosmonaut: The dog Laika, travelling in the second Soviet satellite, was exposed to nearly all the hazards which could confront a man planning an excursion into space. Its presence there would not have been required if the Soviet scientists were interested only in geophysics; the experiment is clear proof that they are serious when they talk of manned rocket flights.

In America, too, space medicine is well-established as a new branch of physiology, and David Simons did not

fly for 32 hours in a gondola this year merely to satisfy idle curiosity. He was studying the subjective impressions of high altitude and possibly (though rather improbably) the effects of cosmic rays on his body.

Before Laika's ascent recently the US Air Force and others made a number of experiments with animals in balloons to test their vulnerability to cosmic rays. Thus, monkeys were exposed for a total of 63 hours, 20 miles up to see if their irreplaceable nerve cells had been damaged — tests of their learning ability afterwards revealed nothing unusual. More positive were the observations on black mice, whose hair turned grey in patches owing to injury to the pigment cells. But the reaction of the dog to the more obvious features of space travel is equally important. It survived the accelerations of launching and there is good reason to believe that humans would, too.




☆ ☆ ☆

Short Wave Portable: Shades of things to come are illustrated by details of the new American Zenith receiver about to be released. Zenith have for some years made a world-range receiver using battery valves and with a wide-band coverage. Their latest model performs the same function, but is fitted throughout with transistors. It needs no aerials other than its own for good reception.

It is the size of an ordinary portable and is claimed to be the smallest and lightest band-spread short-wave set ever built. Weight, 13 pounds, including batteries, is half that of conventional short-wave portables.

Powered by standard flashlight batteries, available anywhere in the world, it will operate up to 30 hours on a set, and many hours listening can be had for the cost of one penny. Transistor operation eliminates needs for tubes, high-cost "B" batteries, or electric power line connection.

VIC 20s ★ ACCESSORIES ★ SOFTWARE ★ PERIPHERALS



Vic 20 \$299! Arfon module \$250! Printer \$479! Disk drive \$699! Cartridges from \$39.95!

We have a wide range of accessories, peripherals, and software for the Vic — including Commodore, Vicsoft, Acme, etc.

EDIBLE ELECTRONICS 50 PARK ST, ABBOTSFORD 3067. (03) 41 5708



CLAMP METER

MODEL YF-700

Top of the range model AC
Voltage 150V 300V 600V AC
Current 6A 15A 60A 150A
300A. Resistance 5kΩ
(Midscale 200Ω)

was \$49.99
NOW ONLY
\$43.55

DISCOUNT DISC DRIVES COMPUTERS

PRINTERS

ITOH 1500 PARALLEL (DAISYWHEEL)	\$1515 + TAX
ITOH 1500 SERIAL (DAISYWHEEL)	\$1555 + TAX
ITOH 8510 PARALLEL	\$910 + TAX
ITOH 8510 SERIAL (GRAPHIC ETC)	\$1015 + TAX

RITRON COMPUTER GRADE P/S
+5V reg 10a 16V unreg @ 1A
KIT \$79.95 inc
Built and tested \$99.50

ETI636 MOTHERBOARD
7 Slot Motherboard \$90.00
Built and Tested \$120.00
ACTIVELY TERMINATED

INTERSIL LCD \$38.50 3 1/2 DIGIT PANEL METER KITS

Build a working DPM in 1/2-hour with
these complete evaluation kits.
Test these new parts for yourself with inter-
sil's low cost prototyping kits com-
plete with A/D converter and LCD dis-
play (for the 7106) or LED display (for
the 7107). Kits provide all materials in-
cluding PC board, for a functioning panel
meter ICL7106EV (LCD)

P.C. EDGE CONNECTORS



S100 gold plated wire wrap	\$8.50
S100 solder tail	\$7.90
D2 Motorola bus	
43/B6 solder tail	\$8.50
43/86 gold plated wire wrap	\$11.50

10 TURN POTENTIOMETERS

Stock resistance values

50R 100R 200R
500R 1K 2K 5K
10K 20K 50K
100K

Spectrol model 534 "a" shaft

Price 1 9 \$9.90
10 + values may be mixed \$9.50

DIP PLUGS

Ideal for use with flat
ribbon cable or to
mount components on




14 pin \$1.50
16 pin \$1.90
24 pin \$2.90
40 pins \$5

POWER TRANSFORMERS

SPECIALLY DESIGNED FOR
MICROCOMPUTERS

- Good regulation electrostatic shield
- RI 810
8V @ 10A x 15V @ 1A \$31.00
- RI 820 8V @ 20A 15V @ 1A
15V @ 3A \$37.50

20 TURN CERMET TRIM POT



SPECTROL 43P ACTUAL SIZE

STOCK RESISTANCE VALUES
10R, 20R, 50R, 100R, 200R, 500R, 1K,
2K, 5K, 10K, 20K, 50K, 100K, 200K,
500K, 1M, 2M
1-9 \$1.80
10-99 \$1.60
100 \$1.30
Values may be mixed.

Hexadecimal Keypad

\$32.50



19-key pad in-
cludes 1-10 keys
ABCDEF and 2
optional keys and
a shift key.
Ideal for dream
project

MULTIDIALS



Dials to suit 10 T Pots
Model 21 1 8" dia \$16.50
Model 16 9" dia \$12.50
Model 18 1" x 1.75" dia \$21.50

RS232 & "D" TYPE CONNECTORS

PART NO	DESCRIPTION	1-9	10-25	25+
DE 9P	9 PIN MALE	\$3.50	\$3.50	\$3.10
DE 9S	9 PIN F/MALE	4.50	4.20	3.90
DE 9C	9 PIN COVER	2.20	2.10	1.90
DA 15P	15 PIN MALE	4.50	4.20	3.90
DA 15S	15 PIN F/MALE	5.10	4.90	4.70
DA 15C	15 PIN COVER	2.30	2.10	2.00
DB 25P	25 PIN MALE	5.90	5.60	5.10
DB 25S	25 PIN F/MALE	6.90	6.60	6.10
DB 25C	1 pc Grey Hood	2.40	2.20	2.00
DB 25C2B	2 pc Black Hood	2.80	2.70	2.50
DB 25C2G	2 pc Grey Hood	2.70	2.50	2.40
DC 37P	37 PIN MALE	7.90	7.50	7.10
DC 37S	37 PIN F/MALE	10.90	9.90	9.10
DC 37C	37 PIN COVER	4.90	4.50	4.10
DH S	Hardware set (2 Pairs)	2.10	1.90	1.80

cermet single TURN TRIM POT

Spectrol model 63P
ACTUAL SIZE

STOCK VALUES
10R, 20R, 50R, 100R, 200R, 500R, 1K,
2K, 5K, 10K, 20K, 50K, 100K, 200K,
500K, 1M, 2M

1-9 \$1.20
10-99 \$1.00
100 \$0.90

Values may be mixed.


DIP SWITCHES SPST

P/N	No of Switches	Price
SD3	3	\$1.60
SD4	4	1.70
SD5	5	1.90
SD6	6	2.30
SD7	7	2.40
SD8	8	2.50
SD9	9	2.70
SD10	10	3.00

DIP SWITCHES SPST



TEXTTOOL ZIP* DIP 11 SOCKETS



16 Pin Zip* Dip 11 \$11.50
24 Pin Zip* Dip 11 12.50
40 Pin Zip* Dip 11 17.50
Zero Insertion Pressure

INCREDIBLE MEMORY AND DISC DRIVE PRICES

2708	1.9 10-25 25+
2716	4.90 4.00 3.90
2732	4.90 4.20 3.90
4116 (200ns)	8.00 7.50 7.00
4164 64K Dynamic	1.95 1.80 1.75
M58725P (2K x 8)	11.00 10.00 9.50
Static	10.00 9.00 8.50

(As used in new 64K Static S100 PCB)
ALL PRICES INCLUDE SALES TAX

DISK DRIVES

MPI 51 \$275.00 + 17.5% ST.
MPI 52 \$385.00 + 17.5% ST.
MPI 91 \$415.00 + 17.5% ST.
MPI 92 \$515.00 + 17.5% ST.

Mitsubishi 8"

\$625 including tax.

Microline 80 \$499 inc tax

BUILD YOUR OWN SPEAKERS WITH PHILLIPS

PART No	PRICE
AD0140T8	\$11.86
AD01610T8	\$16.95
AD01605-TB	\$16.54
AD0162-T15	\$18.78
AD0162-T15	\$13.03
AD0162-TB	\$13.77
AD0210-SQ8	\$42.00
AD02160-SQ8	\$45.00
AD02161-SQ8	\$33.46
AD10100-W8	\$52.72
AD12100-HP8	\$85.10
AD12100-M15	\$79.11
AD12100-M8	\$79.11
AD12100-W8	\$53.99
AD12200-W8	\$73.12
AD12250-W8	\$83.00
AD12650-W8	\$59.00
AD2273-T8	\$5.03
AD4060-W8	\$19.06
AD5060-SQ4	\$22.05
AD5060-SQ8	\$22.05
AD5060-W8	\$17.59
AD5061-NB	\$17.08
AD70601-W8	\$22.00
AD70620-M8	\$21.54
AD7063-M8	\$20.78
AD70630-M8	\$20.78
AD70650-W8	\$26.96
AD7066-W8	\$26.96
AD80601-W8	\$20.24
AD8061-W8	\$26.20
AD80652-W8	\$27.66
AD8066-W4	\$9.81
AD8081-M8	\$41.11
AD9710-M8	\$19.44
ADF1600-8	\$19.44
ADF500-4500-8	\$19.44

DIODES

	10-99	100+
IN4001	6c	5c
IN4002	6c	5c
IN4004	7c	6c
IN4148	5c	4c
IN5404	30c	25c
IN5408	35c	30c
IN4007	12c	11c


HEATSINKS

High Thermal Capacity Black Anodised

	1-4	5-9	10-49	50-99	499	plus
	\$	\$	\$	\$	\$	\$
HS1 - 38mm	1.85	1.75	1.50	1.35	1.00	0.90
HS2 - 75mm	3.00	2.90	2.50	2.00	2.00	1.50
HS3 - 150mm	5.80	5.40	4.90	3.80	2.90	2.70
HS4 - 225mm	8.10	7.60	7.10	5.90	4.50	4.30
HS5 - 300mm	8.90	8.40	7.90	6.50	4.90	4.60
Unanodised						
HS11 - 38mm	1.40	1.20	1.00	0.90	0.80	0.70
HS12 - 75mm	2.50	2.20	1.90	1.60	1.25	1.20
HS13 - 150mm	4.90	4.50	4.00	3.20	2.45	2.40

BLANK CASSETTES T.D.K.

TDK ADC60	1 for \$3.60	10 for \$26.00
TDK DC60	1 for \$2.10	10 for \$18.00
TDK ODC60	1 for \$3.50	10 for \$31.00
TDK SAC60	1 for \$3.50	10 for \$31.00
TDK SAXC60	1 for \$5.70	10 for \$46.00
TDK DC90	1 for \$2.40	10 for \$21.00
TDK ADC 90	1 for \$3.50	10 for \$30.00
TDK SAC 90	1 for \$4.20	10 for \$39.00
TDK ODC90	1 for \$4.70	10 for \$45.00
TDK SAXC90	1 for \$5.50	10 for \$49.00
TDK DC120	1 for \$4.50	10 for \$37.00
TDK ADC120	1 for \$5.40	10 for \$46.50



Please debit my Bankcard.
Bankcard No.
Expiry Date
Name
Signature

Post & Pack \$2.50 small kits, heavier kits add extra postage.


Prices subject to change without notice. Send 60c and SAE for free price list and
inclusion on all future mailing lists.

MAIL ORDERS: PO Box 235, Northcote, Vic 3070. Min P & P \$1.00.
Ph: (03) 489 8131.

ROD IRVING ELECTRONICS

425 HIGH STREET, NORTHCOTE 3070, MELBOURNE, VICTORIA. Ph (03) 489 8131. Telex No. 38897

Most products also available at Ritronics Wholesale at 48-50 A'Beckett Street,
Melbourne, right near R.M.I.T. (Please note prices will vary due to Sales Tax laws.)



Portable computer from Hewlett-Packard

A new portable computer from Hewlett-Packard — the first of its kind from HP — has the capabilities of larger, desk-top computers, including Basic language programming, interfacing and software. However the new HP-75C portable computer measures only 254mm by 127mm by 32mm, weighs 737 grams and runs on batteries.

Key features of the new portable computer include 169 instructions, including 147 Basic statements and functions. Other functions including time and appointment notification are provided in a 48K-byte ROM-based operating system, and a built-in Hewlett-Packard Interface Loop (HP-IL) allows communication with instruments, peripherals and other computers.

Software for specific applications such as engineering, math and statistics, and general use packages such as electronic spreadsheets and graphics presentations are also available.

The HP-75C's CPU is a CMOS version of the 8-bit custom processor in Hewlett-Packard's Series 80 personal computers.

The HP-75C ("C" for continuous memory) has 16K bytes of RAM (random-access memory) built in. The RAM can be increased with the addition of the 8K memory module (HP 82700) to 24K bytes. Three plug-in ports in the computer accept 8K- or 16K-byte ROM software or enhancement modules. The ROM-based modules let the computer be customised for specific applications, and also free all the RAM for data. With three 16K-byte plug-in modules, the 48K-byte built-in operating system and 24K bytes of RAM, the HP-75C's maximum memory is 120K bytes.

The computer's real-time clock and non-volatile memory give it some unusual features. For instance, the HP-75C can be left unattended, and it will "wake itself up" at a programmed time, take a reading from an instrument, store or communicate that reading, turn itself off, and carry out the same task every day. Appointments are another example. The user can key in future appointments and the HP-75C will beep and flash a reminder at the correct date and time.

Touch-typing is possible on the HP-75C, thanks to its typewriter-like



"QWERTY" keyboard. Every key can be redefined by the user for specific applications and the redefined keys can be given new labels by snapping on keyboard overlays.

The 32-character, liquid-crystal display serves as a movable "window" on a 96-character line and features character descenders.

Rechargeable nickel-cadmium batteries power the HP-75C. Batteries will run the computer for 30 hours in maximum power-drain mode, or for three or four weeks of normal use.

One type of off-line mass storage is integrated into the HP-75C. A hand-operated magnetic card reader reads or writes up to 1.3K bytes per card. A portable digital cassette recorder is available but the card reader gives the HP-75C integrated mass-storage in the portable mode.

HP-IL, Hewlett-Packard's two-wire serial interface for battery-operable controllers, is built into the new HP-75C, and lets it communicate with a large number of devices including HP-IL and non-HP-IL

instruments, peripherals and other computers. The HP-75C's Basic programming language and features are designed to make it an easy-to-use, portable controller.

On a desktop or lab bench, the HP-75C ties into full-sized printers and plotters, and can be easily detached from the system to become a portable, battery-powered computer. The HP-75C's desktop peripherals consist of the HP 82905B 80-column impact printer, HP 82912 and HP 82913 22.5cm and 30cm video monitors, and HP 7470 colour-graphics plotter.

Both video monitors, when used with the HP 82163 video/TV interface, provide 16 lines by 32 characters display from the HP-75C. The video/TV interface also allows the HP-75C to work with other monitors and home TV sets.

And the price? Just \$1639 for the basic unit, with instruction manuals extra.

For further information contact Hewlett-Packard Australia Limited, 31-41 Joseph Street, Blackburn, Vic 3130. Telephone (03) 890 6351.

Microcomputer News

Tandy offers discounts in education market

In a bid to introduce and expand the use of Tandy computers in Australian schools, Tandy Electronics are offering large discounts to schools which purchase TRS-80s.

The offers are available to all schools from primary to university levels and are valid until February 28, 1983. There is no limit on the number of computers which may be purchased at the discount price.

Discounts offered range from \$400 on the 1983 catalog price of a 16K Model III "student station" to more than \$10,860 on a complete "TRS-80 Classroom".

The TRS-80 Classroom configuration includes a disk-based 48K Model III "teacher station", a network 2 controller to link the teacher station to up to 16 Model III "student stations", a Line Printer VI that can be shared through the network and a choice of either five, ten or 16 student stations. Two educational software packages are included in the price.

As part of the promotion, Tandy will match the number of student stations purchased with an equivalent number of TRS-80 Pocket Computers, to be used, perhaps, as part of fund-raising ventures by the school. In addition TRS-80 Service agreements will be offered at a reduced price to TRS-80 classroom purchasers.

According to Tandy's Managing Director, Mr Charles Wyse, many such promotions have been offered previously by other microcomputer companies. "However, I have yet to see a rival promotion that offers anywhere near the computer-value-for-dollar of ours... What schools require for that amount of expenditure is a complete computer classroom that is truly interactive and available to everyone in the school."

High tech export ban

In their attempts to prevent high-technology leaks to unpopular countries, the United States Customs Service recently seized and impounded "Belle", a chess computer which has won world championships.

Ken Thompson, the Bell Laboratories scientist who built the machine was taking it to Moscow for a chess exhibition at the time. The US Commerce Department said that Belle, winner of the World Computer-Chess Championship tournament in 1980, might be of military use to the Soviet Union.

A versatile EPROM programmer



Digital Automation has released a new EPROM programmer with an exceptional variety of features.

Designed for both the hobbyist and professional, the programmer can handle most popular EPROM types, including the 2716, 2516, 2732, 2532, 2764, 2564 and the latest 27128 128K bit device. The programmer is interfaced to a micro- or minicomputer by a built-in RS-232C port and appears to the host computer as a standard terminal.

EPROMS can be programmed, read or erasure verified simply by sending the appropriate sequence of characters — no additional "personality modules" are required. All contents and data are in printable ASCII codes and data to be programmed into the EPROM can be in either Intel or Motorola format or standard hex.

A manual gives interfacing details and includes software for use with Unix or Idris systems. CP/M software is available as an option.

For further information contact Digital Automation, 44 Winbourne Rd, Brookvale, NSW 2100. Phone (02) 939 1522.

First Computer Graphics conference

The first conference of the Australasian Computer Graphics Association will be held this year in association with the Institution of Engineers conference "Computers and Engineering". It will be co-sponsored by the NSW Institute of Technology, the Association for Computer Aided Design and the Institution of Engineers, Australia.

The conference aims to consider all aspects of the development and operation of computer graphics systems in all computer applications.

The organisers of the conference are calling for papers in areas including mapping, computer aided design, advertising, business graphics, medicine, personal computers, animation and video and computer assisted learning, among other topics.

Authors are invited to submit titles of proposed papers together with a 1000 word synopsis outlining content and conclusions by January 28, 1983.

For further information contact The Conference Manager, The Institution of

Engineers, Australia, 11 National Circuit, Barton, ACT 2600. Phone (062) 73 3633.


Also on the subject of computer graphics, a special interest group known as SIGGRAPH-ACS has been formed. The group is modelled on similar overseas groups and is sponsored by the Australian Computer Society.

Aims of the group are the advance graphics technology, distribute information on techniques and identify policy issues relating to an Australian graphics industry. Full details are available from SIGGRAPH-ACS, PO Box N26, Grosvenor St, Sydney, 2000.


Rumours of a Mark II IBM personal computer

From the United States comes a rumour that IBM is preparing to introduce a successor to its personal computer. Based on the 8086 microprocessor, the new machine will have greater power, more memory capacity and larger disk drives. Introduction is said to be scheduled for late this year.

DISCOVER THE WORLD OF THE 6809 MICROPROCESSOR

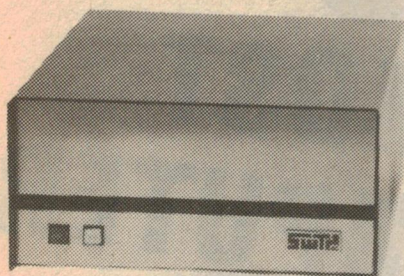

6809 COMPUTER

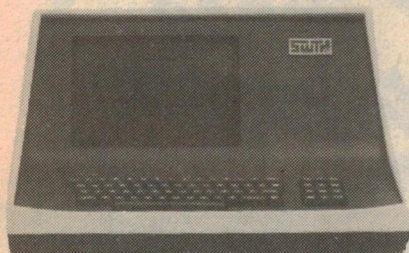


8212 TERMINAL


(ASS. IN AUSTRALIA)

HARDWARE DESCRIPTION

S/09 6809 Computer w/128K Memory
/09 6809 Computer w/64K Memory
8212 12" Terminal w/monitor
DMF 2 Disk System w/2.5m Capacity
CDS-1 Winchester Hard Disk System
MP-09A 6809 Process/Board (assem)
D5-2 double side/double density 720KB
3809 128K Memory Expansion for S/09
MP-LA Parallel Interface
MP-L2 Dual Parallel Interface
MP-N Calculator Interface
MP-R Eprom Programmer
MP-S Serial Interface
MP-64 Memory board 64K
MP-S2 Dual Serial Interface
MP-SX Serial Interface Expansion
MP-T Interrupt Timer
S-32 Universal Static Memory Card

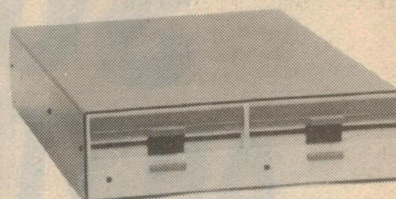

**DMF DISK
SYSTEM 2.5M**



**D-5 720k
DT-5 1.3M**

NEW PRODUCTS SOON

SOFTWARE SPECIALIST FOR THE 68XX SERIES

MICROWARE SYSTEM CORP

OS-9 Level 1 Operating System	\$195.00
OS-9 Level 2 Operating System	\$495.00
Basic 09 Programming Language	\$195.00
Pascal OS-9	\$440.00
Macro Text Editor	\$ 95.00
Assembler	\$ 95.00
Debugger	\$ 35.00
Cobol Programming Language	\$995.00
C Programming Language	\$440.00

TECHNICAL SYSTEMS CONSULTANTS

UNIFlex Operating System	\$550.00
UNIFlex Basic	\$200.00
UNIFlex Pascal	\$250.00
UNIFlex Fortran 77	\$350.00
UNIFlex Relocating	
Assembler & Linkage Editor	\$175.00
General Purpose Flex 6809	\$170.00
General Purpose Flex 6800	\$170.00
Exorcisor Flex 6809	\$170.00
SWTPC Flex 6809	\$ 45.00
GIMIX Flex 6809	\$ 99.00
Fortran 77 for Flex	\$425.00
Extended Basic	\$110.00
Utilities	\$ 82.50
Pascal for Flex	\$220.00
68000 Cross Assembler for Flex	\$275.00

Sort Merge Package	\$ 82.50
Text Editor	\$ 55.00
Assembler	\$ 55.00
Debug Package	\$ 82.00
Diagnostics	\$ 82.50
Text Processor	\$ 82.50

FRANK HOGG LABORATORY, INC

XForth	\$165.00
Basic Programmer Tool Kit	\$ 77.00
Extended Use Utilities Pack	\$ 77.00
Password Protection Pack	\$ 99.00
Dynasoft Pascal Flex	\$ 99.00
Bill Payer System	\$185.00
Spell Test	\$220.00
Super Sleuth	\$110.00
Stylograph 2:0 Flex, OS-9	\$325.00
Dynastar Full Screen	
Editor OS-9, Flex	\$ 99.00
CRASMB Cross Assembler, Flex,	
6809, 6800, Z80, 8080, 6502	\$149.00
Dataman + DBM	\$220.00
Plot	\$ 49.00
Tabula Rasa	\$110.00
Job Control Program	\$ 99.00
TRS80C Colour Flex	\$105.00

WASHINGTON COMPUTER SERVICES

6809RMS DBM for Flex	\$220.00
6809 RMS DBM for UNIFlex	\$330.00
6809 RMS DBM for OS-9	\$275.00

UNIVERSAL DATA RESEARCH INC

DBM 2 Flex	\$450.00
DBM 2 UNIFlex	\$550.00
Payroll	\$495.00
Accts Receivable	\$495.00
Accts Payable	\$495.00
General Ledger	\$495.00
Inventory	\$495.00

TALBOT MICROSYSTEMS

tForth	\$ 99.00
tForth+	\$275.00

COMPUTER SYSTEM CENTRE

DYNAMITE Disassembler	\$ 66.00
DYNACALC	\$220.00

DUGGERS GROWING SYSTEMS

6809 C Compiler ver 2:0	\$130.00
-------------------------	----------

OMEGASOFT PRODUCTS

PCS2 Pascal Compiler Flex,	
OS-9, MDOS	\$490.00
Rall1 Relocatable Assembler &	
Linking Loader	\$150.00

SWTPC

EDIT Word Processing Editor Flex	\$110.00
C Compiler for UNIFlex	\$ POA
* Prices subject to alteration without notice, \$5 handling and packaging plus postage.	

AVAILABLE FROM

Offices and showrooms:

Shop 1 165 Bunnerong Rd Kingsford NSW 2032.

Postal address:

PO Box 380 Darlinghurst NSW 2010.

Tel (02) 344 9111

Telex AA22579

J.H. MAGRATH & CO

55 A'Becket St,

MELBOURNE, VIC 3000

TEL: (03) 347 1122

SUPER 80

AUSTRALIA'S MOST POPULAR KIT COMPUTER

it had to happen!

Are you fed up with 'built up' projects? Why not build this very high quality kit computer and save over 50% on equivalent built up units!

A FULL SIZE COMPUTER KIT

You are supplied with a full board including power-on EPROM monitor, 16K of RAM, cassette interface (relay activated) for universal control of any tape recorder, TV modulator and direct video output PLUS full size professional keyboard — not a 'feel less' toy.

ALL THIS FOR ONLY

\$245

Cat. K-3600

~~WAS \$295~~

OPTIONAL EXTRAS

Transformer (M-2325)	\$24.50
BASIC Interpreter (tape) (K-3602) ...	\$13.25
IC Socket Set (K-3603)	\$13.25

Yes, this would make the fully assembled computer with above options

ONLY \$296.00!

SAVE \$50!

OUR MOST POPULAR KIT EVER!

THE FANTASTIC SUPER 80

Any extra parts shown in illustration are sold as separate chargeable items

Construction details and a full copy of the EA article is supplied with each kit. We also have available two very comprehensive manuals to assist in construction and programming:
 SUPER 80 Technical Manual (B-3600) \$9.50
 SUPER 80 BASIC Handbook (B-3602) \$9.50
 This book has over 50 separate versatile commands. Features arithmetic and integer functions, user-defined functions, machine language routines, text editing, string operations. Also contains 25 error codes to assist you in programming.

DICK SMITH ELECTRONICS

See page 98 for address details



ADVANCED OPTIONS AVAILABLE:

Lower Case Generator Option (K-3607)	\$50.50
BASIC in EPROM (K-3604)	\$50.75
S-100 Expansion Unit (K-3606)	\$21.00
Metal Case (H-3200)	\$41.25

DSE A163M*

\$50,000 IN PRIZES TO BE WON IN THE MIGHTY MATCH-UP COMPETITION.

Microcomputer News

Business opportunities in computer repair

The upsurge in the use of microcomputers in small businesses may be on the verge of creating a booming new industry — computer repairs.

For many small business users the computer has become central to the day-to-day running of their operation. Losing the computer for a week (the shortest possible repair time promised by many distributors) can mean losing the means to carry on business and thus losing money.

Perhaps a recent development in the United States points the way. There two major computer service companies have opened the first of a planned nationwide chain of computer repair shops. TRW plans 15 of the service centres, while MAI has opened three "Sorbus" repair stations so far and has plans for more.

"The retail computer service centre is the equivalent of the TV repair service shop," says Bill Whelan, manager of Sorbus, whose stores currently offer service on 11 types of personal computer, including IBM, but not Apples, which are covered by an extensive network of distributors.

"The need is there. As more and more people buy personal computers more of them will need repair."

National Semiconductor Digitalker programs

National Semiconductor Corporation has announced a software package to support its MM54104 Digitalker speech processor chip. The new Digitalker Vocabulary Selection System (DVSS) contains a 500-word vocabulary provided on two 20cm single-sided CP/M floppy disks.

The 500 individually-spoken male-voice words can be used in prototyping and in the production of products requiring voice output.

In a typical application a user can define a vocabulary with words available in the DVSS software package and download this vocabulary into RAM. Once in RAM, the words can be arranged into the phrases or sentences required. The resulting software can be sent to a ROM programmer.

National's DTSW-500 DVSS software package contains numbers, letters of the alphabet and a useful variety of words for industrial and consumer products. The package sells for \$199 in the United States.

Support for local software industry

Senator John Siddons, Victorian Senator for the Australian Democrats, recently introduced a Bill in Federal Parliament to exempt all forms of Australian-produced computer software from sales tax for a five year period.

Speaking in support of the Bill, Senator Siddons made the point that the software industry in Australia is at a crossroads. It is expanding rapidly with hundreds of small businesses engaged in the industry, and shows promise of becoming a significant export earner.

The importance of a native software industry is demonstrated by the trade balance in the computer field. For every dollar of equipment and software exported, Australia currently imports \$14 worth of computer hardware and software.

Present Government policy concerning the software industry is causing a great deal of confusion at the mo-

ment. In the past provision of software was regarded as a "service industry", whose products are not generally subject to sales tax.

However, earlier last year the Taxation Office apparently re-interpreted the sales tax schedules and assessed some software companies for up to three years unpaid sales tax. At least one company, DeForest Software, has successfully appealed against the retrospective imposition of sales tax.

Concluding his remarks in support of the Bill, Senator Siddons stated "I believe programs for computer software should be viewed as mechanisms for information transfer, and thus analogous to books. Like books, they should be free of tax."

Readers who wish to contribute to the debate on government support for the Australian software industry can write to Senator Siddons at the Commonwealth Parliament Offices, 400 Flinders St, Melbourne, Vic 3000.

Acme software for the VIC-20

A new software company, Acme Software has commenced operations in Melbourne, specialising in programs for the Commodore range of computers.

The first four offerings are for the VIC-20, with more to come. Currently available are the games "Locomotion", "VIC-Derby" and "Sentinels", and "VIC-Voice", a machine language program which shows how speech can be synthesised using the standard VIC sound generation circuitry. The user can record his or her own voice for use in programs.

All Acme software requires at least 8K of memory in addition to the standard memory of the VIC-20. Cost of cassette programs is \$20, including an instruction manual.

Look for the new software at Commodore dealers or contact Acme Software, PO Box 1053, Richmond North, Victoria, 3121.

Versatile communications board suits the Apple



The NetComm 2780 Communications board for the Apple II computer provides both synchronous and asynchronous data communication capabilities. Using NetComm Apples

can communicate with mainframe and mini-computers from IBM, DEC and Data General as well as with data bases such as The Source, Infonet and CSIRONET, or used together in local area networks.

The board slots into the Apple II computer and contains a Z80 microprocessor to handle synchronous communication at up to 9600 baud. The user can select the option of running the Apple as a teletype (asynchronous) terminal or as an IBM 2780 terminal.

A transmission program on disk, control code and a user guide are supplied with the board.

For more information contact NetComm Pty Ltd, 7th Floor, 275 Alfred St, North Sydney, NSW 2060. Phone (02) 92 4655.

Tektronix to hold micro design seminars

Tektronix Australia Pty Ltd has announced a new seminar in its series on microprocessor design. Following on from the microprocessor selection seminars, the Microprocessor Design Tools seminar focuses on the hardware and software tools needed to develop particular microprocessor applications.

The one-day seminar will cover the use of development systems with Pascal editors, compilers and debuggers. The Unix operating system and equipment such as high speed emulators and logic analysers will also be discussed.


Seminars will be held in Sydney on February 22 and Melbourne, February 8, and are intended for engineers and managers involved in microprocessor

32K BYTES FOR THE ZX81

SPECIAL RAM PACK FOR THE ZX81

This board uses dynamic RAM chips for lower cost and lower power consumption. Simply plugs into the ZX81 expansion port offering 32K BYTES for basic programmes and data handling. No extra PSU required.

Extra memory to help you build your ZX81 into a powerful microprocessor system at an affordable price. Compare the price with other RAM PACKS available on the market!

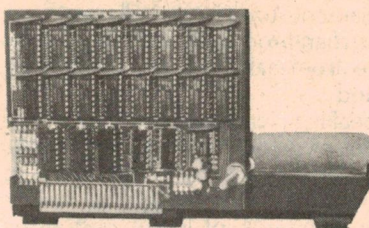

Price for 32K Ram Pack (RP 32) only:
\$165.00 incl. P & P (Aust.)

FREE CASES AVAILABLE SOON

ZX 80/81 PROGRAMMABLE CHARACTER GENERATOR

Using simple BASIC programs you can create your own unique character sets and graphic symbols for games, High Res graphs and charts and interesting patterns.

UPGRADE YOUR ZX80 GRAPHICS

Now you can upgrade your ZX80 to the full animated graphics of the ZX81. Your ZX80 will now run in SLOW mode.

Fully assembled price only \$38.50 incl. P & P (Australia).

Works only in conjunction with 8K ROM from Sinclair (not incl.).

Program symbols normally available only on more expensive microprocessors and you are not limited to preprogrammed graphic sets.

Fully assembled price \$95.00 incl. P & P (Australia).

Uses the 8K ROM from Sinclair (not incl.).

Please send order or S A E for further information to:
VENDALE PTY. LTD., Dept A7, Box 456,
Glen Waverley, Victoria 3150.
36 Plymouth St., Glen Waverley,
(03) 232 0444.

VENDALE

VEN 0261



MAIL ORDER DEPARTMENT: PO Box
254, Heidelberg, 3084.
Phone: (03) 435 3004

NEW PRICES:

OHIO SOFTWARE & HARDWARE

OHIO SOFTWARE:

K1 Hardware Catalogue (incl new boards) ... \$1.98
K2 Software Catalogue (over 200 pieces) ... \$2.98

OHIO HARDWARE:

C4P Video board (converts C1P Series 7) ... \$148.00

COLOUR BOARD — C1P — Series 2

H13 Short Kit, including documentation and tracks for 5v to 12v DC ... (only) \$39.00

H13 Assembled and Tested includes 5v to 12v tracks ... \$89.00

OPTIONS:

SOUND — Parts Kit ... \$2.50

incl assembled and tested ... \$18.00

VIDEO — Parts Kit ... \$2.50

incl assembled and tested ... \$15.00

5v to 12v DC — No kit available (Specialised) — incl assembled and tested ... \$24.00

COMBINATIONS:

Sound and 12v assembled and tested ... \$36.00

Video and 12v assembled and tested ... \$35.00

All 3 mods (H13B) assembled and tested ... \$45.00

"H13B — Deluxe" — All mods assembled and tested (\$89 and \$45) ... \$129.00

Note: All prices include sales tax.

COMPUTER EARS — SPEECH PROCESSOR

for PET, OHIO, UK101, TANDY, APPLE,

NASCOM — Specify ... \$49.00

Write for **SALE** Price List — FREE.

Is the World of ELECTRONICS Your Scene?

- MICROPROCESSORS
- TRANSMITTERS

- RADAR
- RECEIVERS

Switch on to courses leading to challenging, well paid careers as a Radio Officer or Electronics Technical Officer at the



Australian Maritime College

Two year, Associate Diploma courses, HSC or equivalent entry, available in Marine Radiocommunication and/or Maritime Electronics.

The Australian Maritime College is Australia's only national, tertiary educational institution providing multi-level, maritime courses exclusively for the fishing, shipping, port and off-shore industries. The AMC is the only place in Australia where training for Radio Officers is conducted.

Cut out and send to:
Admissions Office,
Australian Maritime College,
P.O. Box 986,
Launceston, 7250,
Tasmania.

Telephone: (003) 26 0731

Please send me more information on
Marine Radiocommunication and/or
Maritime Electronics Courses.

Please print

Name: _____

Address: _____

Postcode _____

17084

EA

Desolder in seconds!


WITH

Soderwick

DESOLDERING BRAID

Select from standard or
NEW
FINEBRAID

1. Hold Soderwick on termination with hot soldering tip. Wicking action soaks up solder.



2. Remove tip and braid. Termination is left clean and solder-free.

- Fast, safe and easy.
- Soaks up molten solder like a sponge.
- Acts as a heat sink to protect circuits and components.
- Six braid widths available.

Buy from your
electronic parts supplier
DISTRIBUTED BY

ROYSTON ELECTRONICS

NSW (02) 709 5293 QLD. (07) 277 4311
VIC. (03) 543 5122 S.A. (08) 42 6655
TAS. (002) 34 2233 W.A. (09) 381 5500

F582

Microcomputer News

applications. A fee of \$30 per person will cover lunch and a set of course materials.

For further information contact Sonya Stokell in Sydney, 888 7066 or Jill Scott in Melbourne, 813 1455.

Apple Computer reports healthy sales increase

Apple Computer Inc has reported a 74% increase in net sales and a 56% increase in net income for the fiscal year ending September 25, 1982, compared to the previous year. Worldwide net sales increased from \$US334.8 million a year to \$US583.1 million and net income increased to \$61.3 million.

Commenting on the results President A. C. Markkula said he was pleased with Apple II and Apple III sales increases which resulted from special promotions that are still underway.

"Investment in research and development during the quarter exceeded the amount spent a year ago by more than 50%," he said. "For the full year, R&D was \$US38 million, 81% more than last year. Several major products resulting from this effort are scheduled for introduction in 1983."

Reports from the United States indicate that Apple will shortly announce the long-awaited successor to the Apple II, the Apple II-E. The II-E is said to have an 80-column video display and handle more than 64K of memory, features which are available for present Apples only through add-on boards. The new computer may sell at slightly less than the price of the present Apple II.

New range of video monitors from Rifa

Rifa Pty Ltd has available a range of peripherals for microcomputer users, including new printers and colour and monochrome video display terminals.

Rifa distributes the BMC range of video monitors, and currently has available several new 30cm green screen displays, including the BM-1A, with a bandwidth of 15MHz and the BM-12E, with a bandwidth of 18MHz. Both monitors accept a 1V p-p composite video signal with negative sync.

Rifa can also supply the BM-1401RGB and the BM-1402RGB colour video monitors. The 1401 has a slit-type shadow mask and provides a resolution of 400 dots (horizontally at the centre of the screen) while the 1402 uses a dot-type mask for a resolution of 640 dots.

Both monitors have a bandwidth of

18MHz and require separate red, green and blue inputs at TTL levels. The horizontal scan frequency is 15.75KHz.

Rifa can also supply the Qume Sprint 9 series of printing terminals, featuring a new carriage mechanism said to be less complex and more reliable than the steel cables and pulleys used by conventional daisywheel printers. The Microline 84 dot matrix printer is also stocked by Rifa.

For more information contact Rifa Pty Ltd, 202 Bell Street, Preston, Vic. 3072. Phone (03) 480 1211.

Software Australia to distribute YE-Data disks

Software Australia has been appointed an Australian agent for YE-Data floppy disk drives and can supply both 12.5cm and 20cm drives.

Managing Director of Software Australia, Dr Michael O'Shea, said that initially the company will concentrate marketing efforts on the YD 180 20cm slimline and YD 174 disk drives. Both drives have 3ms track-to-track stepping times and will support single and double-density and single and double-sided operation, using a steel band head positioner.

"Where possible we will supply orders ex stock. New shipments have been ordered to land in Australia each month, ensuring availability of stock at all times," Dr O'Shea said.

Companies interested in YE-Data drives should contact Software Australia, 2 Somerfield Street, Mt Gravatt, Brisbane 4122. Telephone (07) 349 9122.

News from the Clubs

● The Melbourne Atari Computer Enthusiasts (MACE) meet on the first Sunday of each month at 12 noon at the offices of 3M Australia, corner of Blackburn and Ferntree Gully Roads, Melbourne.

The group publishes a monthly newsletter, the "Australian Atari Gazette". The address is PO Box 246, Northcote, Victoria, 3070.

● BUG-80, listed in our September users' group guide is in fact no longer in operation.

The conjunction of Mitsui and Spectrum in the September listing is an error. The Spectrum 11 minicomputer is of course manufactured by D. D. Webster Electronics Pty Ltd.


● The WA Compucolor/Intecolor User Group meets at the WAIT Computing Centre, Kent St, South Bentley. For information phone (09) 350 7384 during business hours.

● A Professional Apple Users' group has been formed in Melbourne. Through its magazine, PRO, the group will present reviews and articles on all aspects of the Apple II for the professional and business user.

Membership of the group costs \$25, including a once-only joining fee of \$15 and a \$10 yearly subscription. For a free sample of the first issue of the PRO contact the Professional Apple User's Group, Box 969G, GPO Melbourne, Vic 3001.

● The new address of the Sorcerer Users Group of South Australia is c/o Brian Richards, PO Box 647, Salisbury, SA 5108.

Hard disk drive for S-100 computers

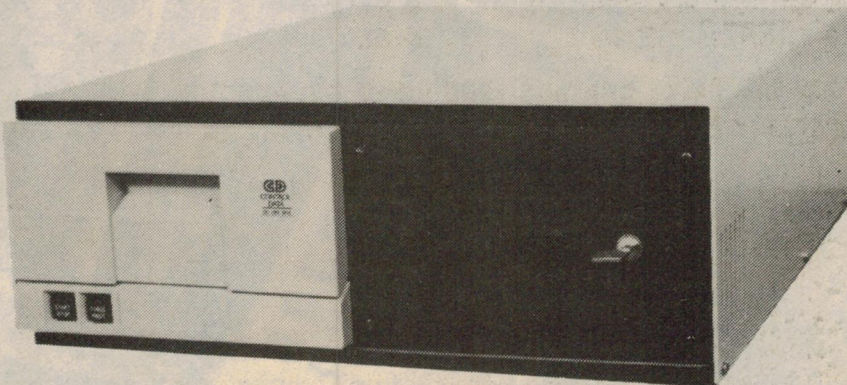

A new hard disk system that allows eight megabytes of data to be stored, and backed up in two minutes has been released by SME Systems of Mitcham, Victoria.

The "Lark" hard disk drive provides eight 8MB of storage on a removable carriage and 8MB on a hard disk. It can be used with any S-100 Z80-based computer system, but is specially designed to complement the SME Systems Unicorn MPU-100 microcomputer system.

Interface to the host computer is through a S-100 controller board which occupies two motherboard slots, and is implemented under the CP/M 2.2 operating system.

Further information is available from SME Systems, 22 Queen St, Mitcham, Vic 3132. Phone (03) 874 3666.

THERE WILL BE 31,536,000 SECONDS IN 1983

**KEEP TRACK OF
THEM WITH THE...**


Handsomely bound, 224 pages thick and measuring a generous 220mm x 145mm, the Omega Discovery Diary is perfect for memoranda, appointments and personal notes. And, as you'd expect, it's packed with the countless facts and stimulating predictions that only Omega gives you.

**ORDER
NOW!**

ONLY
\$8.60

Postage and
Packaging
included

Fill in this coupon and send it to:
Omega Discovery Diary Offer,
Magazine Promotions, PO Box 131,
Chippendale, NSW 2008. Cheques
should be crossed and made payable to
Magazine Promotions.

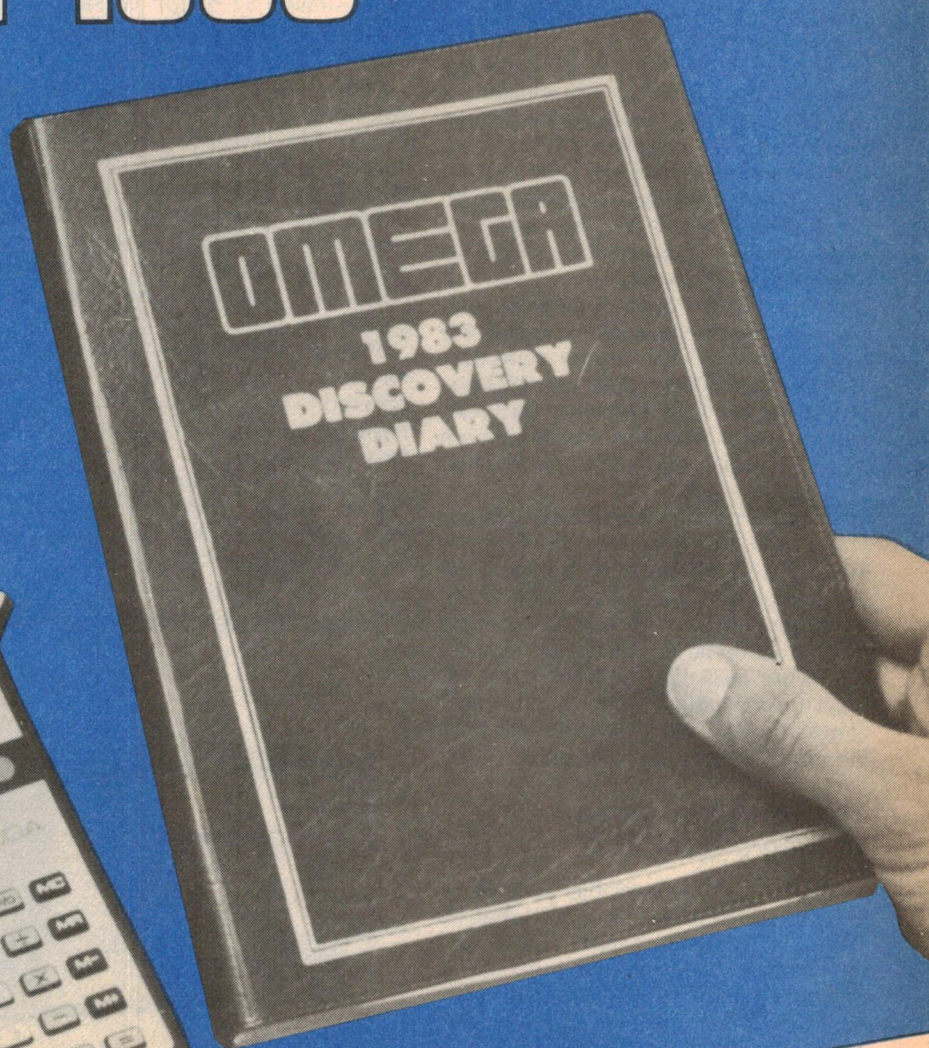

OMEGA DISCOVERY DIARY

Omega Diaries @ \$8.60 each.


Please send me

Total amount enclosed \$

NAME

ADDRESS

POSTCODE

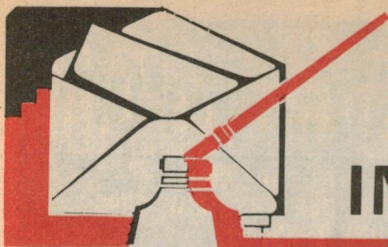

INFORMATION CENTRE

Feedback on the EA Car Computer

CAR COMPUTER: I have recently constructed the Car Computer described in the July, August and September 1982 editions. The computer now works successfully, however my experiences may be useful to other would-be constructors.

The problems I encountered were:

1. The light emitting diodes which were obtained for the display appeared to be unduly susceptible to heat during soldering. Of the original LEDs supplied, only one remained with reasonable brightness, one did not light at all, one was dim, and the remainder weren't much better. I replaced all the LEDs (with some obtained from a different source at less than half the price of the originals). It appears that these LEDs were of better quality, in that all but one LED was satisfactory, however 2 more LEDs had to be selected before a satisfactory LED was installed.

As I was using a 6 watt miniature soldering iron and have never experienced this problem with LEDs before, I can only conclude that present day LEDs are very susceptible to heat damage, as I estimate my soldering times per LED (both leads) at 1-2 seconds.

2. The fuel flow sensor I acquired was the Moray unit. However, the calculation for the calibration number gave 1224 ($=25.6 \times 47.8$). In practice this gave unbelievable rates of fuel consumption (typically 30 litres/100km being indicated from a 2 litre engine). Subsequent experience indicated that the calibration number should be about 2240. When the calibration number of 1224 was used initially, the one second update time for the litres/100km was obtained as expected. However with the new calibration number of 2240, the update time of litres/100km changed to eight seconds, contrary to expectations. Is this consistent with the test made by the program to select the update time from the calibration number?

I will say however that in some respects the 8 second updates are more useful in that demand for fuel appears to be sometimes supplied solely from fuel stored in the carburettor, until such time as the float needle valve opens to allow fuel to flow into the carburettor, and hence be registered by the fuel flow sensor.

3. I also had a problem with excessive

output level from the distance sensor. The symptoms were that the pulses on pin 40 (or CA1) of the MC6821 PIA merged at speeds above 50km/hour, with the result that no distance interrupts occurred over this speed until I attenuated the distance sensor output with a 100k Ω potentiometer. The separation between the magnets and pickup coil used is 10mm. This effect was simulated by feeding a sine wave of variable magnitude (from an audio oscillator) at 10-200Hz into the distance sensor input, thereby identifying the problem, and a solution.

4. Finally the case is not exactly reversible top to bottom unless, when the case is right-way-up, the two boards are not soldered directly together. This was because the bottom of the case was moulded with a multitude of "screw-holes" which conflicted with component tails projecting through the board. If the main board was raised to avoid this conflict, the two boards could no longer be securely soldered together and still line up the display board with the front panel.

For the record the computer is installed in a Toyota Hi-Ace van (long wheelbase) and results, although limited, are promising. The only definite information obtained to date is that at a "steady" 70km/hour, a figure of 7-8 litres/100km (40-35mpg) was obtained. Also the average for the trip of which the above was part, was 10.9 litres/100km (26mpg), the trip being stop/start city driving. Prior to the computer installation, the average consumption was about 13.3 litres/100km with primarily country driving. Figures during acceleration are of the order of 17 litres/100km.

Finally I think that your design has some features which make it attractive when compared to the imported unit described in Electronics Australia October 1982. These features are:

1. It is about \$30 cheaper and is quick to construct, even if the other is pre-assembled.

2. Your computer used readily available components.

3. With a light coloured case, it would stay cooler on top of the dashboard of a car than would one with a black case.

4. The km remaining range I consider a useful output not available from the imported unit (as far as I can determine).

5. Constructing one's own gives one a useful insight into the practical workings of a microprocessor unit.

To be realistic, it's probably a case of "to each his own". However I had the choice of constructing your design, or buying the pre-assembled unit. I chose your design and would still do so. Actual installation of either unit would be much the same, although installing a car computer in a Hi-Ace van takes more than four hours as access to the engine is a little restricted. (D.H., Hazelmere, WA).

● We have not experienced the problem you have encountered with LEDs. The LED lead length when soldering into the car computer display PCB is very short and ideally a clip on heatsink should be used when soldering to avoid destroying the LED.

Regarding the fuel sensor, we have been informed that later versions are calibrated in a different manner to the original sensors and the new number that the sensor calibration number should be multiplied by is 32.97. This is explained in the answer to another letter elsewhere in these pages.

For a one second update time when using a calibration number greater than 1999, the EPROM location 070A can be altered to 20. You will need an EPROM programmer to do this. Alternatively, the software changes for a two second update time have been noted elsewhere in these information pages.

Many readers have found a similar problem with the speed not being displayed above 50km/h. We have provided two solutions as noted elsewhere in these information pages, however, your solution is also suitable.


The case you mention is a type just recently released by Dick Smith Electronics and, as such, our car computer was not initially designed to mount within this case.

Thank you for your comments regarding the attractive features our car computer has over the imported unit. The fact that the imported unit is fully assembled is, as you say, not much of a time saving, particularly when a plated through PCB is used. Another advantage that you have not mentioned is that the EA car computer is easier to repair.

CAR COMPUTER: In the "litre CAL" section of the car computer article (September 1982, page 63) you quote a

Coming Next Month*

REVISED TRANSISTOR IGNITION SYSTEM

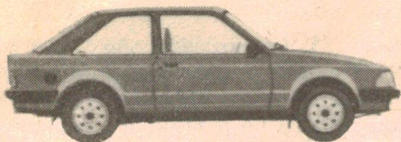

Next month, we represent our Transistor-Assisted Ignition System which has dwell extension for a high-energy spark. The revised circuit contains a number of modifications to improve reliability and to reduce power dissipation. (Due to space constraints, this article has had to be held over from January.)

Versatile Moisture Alarm

Our new moisture alarm can be used to detect either the presence or absence of moisture and can trigger either a relay or a piezoelectric buzzer. It uses a single CMOS IC for low battery consumption.

The new "smart" missiles

With names like Exocet, Sidewinder and Seawolf, the new generation "smart" missiles are small, cheap — and deadly accurate. February "Electronics Australia" tells you how they work.

* Our planning for this issue is well advanced but circumstances may change the final content. However, we will make every attempt to include the articles mentioned here.

ON SALE: Monday, February 7th

AN INTRODUCTION TO DIGITAL ELECTRONICS

Electronic equipment now plays an important role in almost every field of human endeavour. And every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and An Introduction to Digital Electronics can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the first two editions of this book to find out what the digital revolution is all about. The fourth edition has been updated and expanded, to make it of even greater value. Available from "Electronics Australia", 57 Regent St. Chippendale, Sydney. **PRICE \$4.50**, OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. **PRICE \$5.40**.


L. E. CHAPMAN

122 PITT ROAD, NTH CURL CURL.
MAIL ORDERS: BOX 156, DEE WHY, NSW. 2099.
TELEPHONE 93-1848.


SUPER SPECIAL

GRAMOPHONE motor and pickup 3 speed stereo balanced arm.
240 volt \$9.75

PP NSW \$1.50
Interstate \$2.75
WA \$4



SUPER SPECIAL FM STEREO KITS



Sets of 3 modules includes FM tuner decoder and if detector. Circuit diagram supplied.

ONLY \$22 PP \$1.40


Send stamped envelope for copy of Electronics Australia magazine review of the units.

SPECIAL

Diodes AD161-162 \$1 a pair.

SUPER SPECIAL FAMOUS M.S.P. H.I. FLUX SPEAKERS

7 x 5, 15 Ohm. Strap a pair together for 8/Ohm 14/Watt R.M.S. — \$7.00 a pair
P&P NSW \$1.80; Interstate \$3.50; WA, TAS, NT \$4.00



BSR DELUX RECORD PLAYER

11" INCH TURNTABLE CUEING DEVICE, SHIELDED MOTOR, MAGNETIC CARTRIDGE \$50. BASE & PERSPEX TOP \$22 EXTRA
P&P NSW — \$4.50; INT — \$5.50
WA — \$6.50
NT — \$6.50



SPEAKERS 2 1/2" INCH 2 FOR \$1

MAGNAVOX SPEAKERS


8 INCH DUAL-CONE 16 OHM 10 WATT

\$6



PP NSW \$1.80
INTERSTATE \$2.75
WA, TAS, NT, \$4.

DUAL VU METER \$3



Touch micro switches 4 for \$1
100 mixed capacitors fresh stock handy values \$2
Crystals for a colour TV \$1.50
100 mixed resistors handy values \$2
200 mixed screws, bolts, nuts, self tappers, etc \$1

SLIDE POTS

1/2 meg dual 50 cents
1 meg dual 50 cents
2 meg dual 50 cents
25K dual 50 cents
250K dual 50 cents
1K dual 50 cents
50K single 30 cents
250K single 30 cents
10K single 30 cents

VU & BALANCE METERS



12K Ω 100uA **\$2.00**
STEREO VU **\$3.00**

SPEAKER SYSTEMS

\$29.50 PAIR

Two 6" Dual Cone Magnavox Speakers in each cabinet 10 watts RMS

P&P NSW \$4.50 INT \$5.50 WA \$6.50 — NT \$6.50


POTS ROTARY

1/2 Meg 30c
1 Meg 30c
100K 30c
100K Switch 50c
50K Double Pole Switch 50c
7,500 30c
10K Switch 50c
250K 30c
50K 30c
20K 25c
10K Min Pots 50c
50 Ohm 50c
1/2 or 1 Meg Switch 50c
1/2 1 meg dual Concentric tapped at 100K \$1
2 meg ganged double pole switch \$1
1.5 meg dual ganged 50c
2 meg ganged log \$1
1 meg dual ganged \$1
1/2 meg dual ganged LIN 75c
25K 50K dual ganged Concentric double switch \$1
200K single line 30c
20K wire wound 75c
dual log 10K 75c
100K dual ganged linear pots 75c
10K sub min log pots 50c
250K ganged pots 75c
25K lin ganged pots 75c

SPECIAL MAGNAVOX SPEAKERS

\$20 PAIR

10 INCH WOOFER
10 INCH MID-RANGE
8 OHM SYSTEM, 20 WATTS RMS




P&P NSW \$3.50 — INT \$4.50 — WA \$5.50 — NT \$6.50

SPECIAL

SPEAKER CROSSOVER NETWORKS 2WAY FREQ 4KHZ 30W 80HM

\$2



multiplying factor of 25.6 to arrive at the number of pulses per 0.1 litre. The literature provided with the Moray sensor I bought quotes a calibration number flow rate of 2.4 gallons per hour. Please correct me if I am wrong, but I calculate approximately 32.9 secs/0.1 litre for the correction factor.

Although I have positioned the fuel filter between the Moray sensor and the fuel pump, the much desired litres/100km facility is next to useless because of the cyclic fuel flow produced by the pump. Could this perhaps be remedied by increasing the one-second time period upon which the calculation is based. At present, on a level road, at a constant speed the reading typically cycles between 6 and 12 litres/100km. Any suggestions would be much appreciated. (P.G., Red Hill, Qld).

● From our experience, the litres/100km reading is quite effective particularly at a constant speed. Perhaps the needle valve in your carburettor is sticking, producing erratic flow in the fuel. If this is not the problem, the update time for the reading can be increased by altering the program listing in the EPROM. Note that for these changes the EPROM does not need to be erased, just reprogrammed in the appropriate locations. For a two-second update time, the addresses from 670A to 670F should be altered to read as follows; 20 00 84 01 81 01. No other changes are needed.

The multiplying factor of 25.6 for the Moray flow sensors is correct for the first version of the sensor. Moray have now released a newer flow sensor which apart from a slightly differing rotating vane, is calibrated in a different manner. What is done now is to allow a flow rate through the sensor of 2.4 gallons per hour or 10.92 litres/hour. The frequency from the flow sensor is then measured in Hz and this is given as the calibration number on the sensor. Multiplying by 32.97 will give the number of pulses per 0.1 litres.

If you wish to make the above change to your EPROM you will need access to an EPROM programmer such as our low cost design featured in January 1982 (File No. 2/CC/66).

CAR COMPUTER: I have recently completed construction and installation of the EA Car Computer and offer the following comments, which may be of interest to would-be constructors.

Regarding the distance sensor, if two magnets are mounted side by side and the coil placed 10mm away as you suggest, the signal strength is too great, causing transistor Q6 to saturate and turn hard on at a speed of approximately 50km/h. Two methods of overcoming this are: to remove the coil to about 40mm away from the magnets or to leave the coil where it is, remove one

magnet from each side and place a 15k Ω resistor in series with the coil.

Regarding the Moray Fuel sensor, the unit I purchased had only one calibration number on it of 44.7. When multiplied by 25.6, this gives a calibration number of 1144 pulses per 0.1 litres. By pumping a measured 10 litres of fuel through the sensor several times, I was able to determine that the correct number was 1518.

Also several other problems are evident:

1. The MPU, IC1, runs quite hot to the touch. It would be rather uncomfortable to keep a finger on it continuously. My main worry is, what will happen when the weather really gets hot?

2. When the ignition is turned on, there is a momentary flash when all display segments and LEDs light up, except that LEDs 0 and 8 do not light. At night, just the faintest glimmer is barely discernible in these two.

3. When the AV switch is activated along with switches 1 and 2, both LEDs 8 and 9 are energised simultaneously. This does not occur when these switches are used as numerals. This could well be perfectly normal operation.

4. When calibrating "Litres Rem", the display can only be zeroed by adding to the displayed random number a suitable number to add up to 1000. However, the first addition after loss of memory is usually incorrect, but subsequent additions are usually correct.

5. Given the above five points, when ignition is turned on, one of the following occurs:

- (a) All functions operate correctly (which is usually the case).

- (b) Occasionally there will be the usual momentary flash of all display segments and most LED's, then there will be no display. None of the function switches operate. Switching off and then on again

Electronics Australia Reader Service

"Electronics Australia" provides the following services:

PHOTOSTAT COPIES: \$3 per project, or \$6 where a project spreads over multiple issues (price includes postage). Requests can be handled more speedily if projects are positively identified, and if not accompanied by technical queries. We reserve the right to supply complete back issues instead of photostats, where these are available.

CHASSIS DIAGRAMS: For the few projects which require a custom metal chassis (as distinct from standard cases) dyeline plans showing dimensions are normally available. \$3 including postage.

PC BOARD PATTERNS: High contrast, actual size transparencies: \$3, including postage. Please specify positive or negative.

PROJECT QUERIES: Members of our technical staff are not normally available to discuss individual projects, either in person at our office, or by telephone.

REPLIES BY POST: Limited to advice concerning projects published within the last three years.

Charge \$3. We cannot provide lengthy answers, undertake special research, or discuss design changes. Nor can we provide any information on commercial equipment.

OTHER QUERIES: Technical queries outside the scope of "Replies by Post" or submitted without fee may be answered in the "Information Centre" pages, at the discretion of the Editor.

COMPONENTS: We do not sell electronic components. Prices and specifications should be sought from advertisers or agents.

BACK ISSUES: Available only until our stocks are exhausted. Within six months of publication, face value plus 90c for post and packing for each issue. Seven months and older, \$3 (includes post and packing and storage fee).

REMITTANCES: Must be negotiable in Australia and made payable to "Electronics Australia". Where the exact charge may be in doubt, we recommend submitting an open cheque endorsed with a suitable limitation.

ADDRESS: All requests to the Assistant Editor, "Electronics Australia", Box 163, Chippendale, 2008.

will restore normal operation, memory is unaffected.

(c) Occasionally, there will be the usual momentary flash and pause after ignition switch on, then it will display all segments ie, 8.8.8.8. and all LED's except 0 and 8. Sometimes the intensity of the light fluctuates. It may be necessary to switch off and on again more than once before it will revert to a normal display. All memories are lost, and revert to random numbers. None of the function switches operate.

Continued on page 134

Notes & Errata

COMPUVOICE (October 1982, File 2/CC/75): A change in the circuit around IC2, the 74121, will give more set-up time for the SC-01. Route the STB signal from the computer to pin 5 of IC2 rather than pins 3 and 4. These two pins should then be connected to ground.

The System-80 apparently accesses the printer port automatically after an LPRINT statement to check the status of the printer buffer. This can cause the Compuvoice to resume sounding after receipt of a STOP code. The solution is to execute an OUT 253,63 which sends a stop code directly, rather than via the printer driver routine. The equivalent for the TRS-80 Model 1 is POKE 14312,63.

In some cases it may be necessary to repeat the statement to ensure that it is latched, since this method does not read the READY signal from the SC-01.

FLUORESCENT LIGHT STARTER (October 1982, File No. 2/PC/33): Some have been sold with a 0.1 μ F/400VW capacitor. This must be a 250VAC unit as originally specified otherwise there is a fire risk. Also, if some tubes prove difficult to start, the .015 μ F. capacitor may be altered to 0.1 μ F. Finally, the rating for the 56 Ω resistor should be 1/2W.

MARKETPLACE

FOR SALE

CB RADIOS \$69, walkie-talkies, shotwave radios, military, outback, business, amateur marine. Repairs, aeriels, 40ch conversions, new rigs weekly. Bridge Disposals, 12 Old Town Plaza, Bankstown Rail. Station. Ring Sam 7pm-9pm only (02) 407 1066.

AMIDON FERROMAGNETIC CORES — Large range for all receivers and transmitter applications. For data and price list send 105x220 SASE to: RJ & US Imports, PO Box 157, Mortdale, NSW 2223.

SUPER 80 SOFTWARE & HARDWARE. Joysticks — fully proportional dual joysticks with four pushbuttons. For use in real time games. Comes complete with manual and interface program and demonstration program listing \$39.95. Demo program on tape \$10. Editor Assembler to run on a 16k (or more) Super 80. Complete with a 21 page instruction manual, \$35.45. Source Listing of monitor V1.2 Original source code of Super 80 monitor program with comments. Great for learning machine code, \$11.95. Write to Pelatronics, PO Box 807, Toowong, Qld 4066. Include \$2 p&p.

Information Centre ctd

(d) Occasionally after the usual momentary flash and pause, the unit will display rEdy. Once again all memories revert to random numbers, but all function switches will operate. Switching off and on again will bring up rEdy every time until one of the function switches is activated.

These problems were evident right from the first switch on. Initially I used sockets for all ICs, but have since removed all except ICs 1-3 and soldered them direct to the board.

Any suggestions you could offer as to where or what to look for would be most welcome. (D.W., Tamworth, NSW.)

● We will consider each point in turn. So that the distance sensor will provide

CLUBS

TUNE IN THE WORLD! Join the Australian Radio DX Club and enjoy our monthly illustrated offset magazine. In 1982, we issued over 360 pages of news of long-distance radio reception! ARDXC welcomes newcomers to the DX listening hobby. Members are of all ages and vocations — students and retired folk especially welcome. The comprehensive New Member Kit includes "The Guide To Dxing For Beginners" — unique to ARDXC! Splendid range of Club services and supplies available. Send three 27c stamps to the ARDXC, Hon Sec, Box 227, Box Hill, Victoria 3128 for a sample issue of our magazine, a membership application form, and full details about the club.

FOR HIRE

REMOTE ANTENNA SITE, 40 miles from Perth. Electrically quiet — ideal for large HF installations. We will erect and maintain to your specifications. Write to Antenna Science & Engineering, PO Box 238, Nedlands, WA 6009 or (09) 386 2010 for details.

pulses beyond 50km/h we suggest that either the leads from the coil be transposed or the 0.1μF capacitor at the base of Q6 be reduced to 0.001μF. The new Moray sensors have been calibrated using a different method and the number written on the sensor should now be multiplied by 32.97.

It is quite normal for IC1 to run hot and since it is rated for operation at 70°C we would expect the MPU to be satisfactory even in high ambient temperatures. The momentary flash when all the display segments and LEDs light is normal and occurs when the MPU is receiving the power on reset. The fact that the 0 and 8 LEDs hardly glow is not important since they function when the computer is operating normally.

The 8 and 9 LEDs light when the AV button is pressed on the litres and km functions since on pressing the AV button, RANGE is assumed. In fact there

MICROCOMPUTERS for weekly rental — \$25 per week. Commodore PET systems, with manuals and software tapes. Cassettes include games and self-teaching tutorials in BASIC and 6502 Machine Language. David Bates & Associates, ph (02) 630 8652.

READER SERVICE

COMPUTER CLINIC repairs and services Sorcerer, Pet, Apple, Super 80, System 80, Tandy and others. Businesses & hobbyists catered for. (07) 269 8573, PO Box 68, Aspley, Qld.

PRINTED CIRCUIT BOARDS from your own artwork. Prototypes, 100's, or 1000's. Open Saturday mornings too. Contact Peninsula Circuits, 7 Portrush Gr, Mornington 3931. (059) 75 5568.

COMPUTER REPAIRS — WA. All makes. Eproms Programmed. Custom Interfacing and Hardware Mods. J & T Computer Services, West Aust (09) 401 2733.

MICROBEE DOCUMENT EDITOR a word processing program.


Features editing of current and previous lines, block movement of text, forward/reverse scrolling for easier proof reading, line insertion and deletion. Single keystroke printer settings. Directions included on customising all formatting instructions. 15-page instruction Manual and complete listing \$10. Manual, listing, plus tape \$15.

Embe Software, 27 Roberts Avenue, Mortdale 2223.

are no litres AV or km AV functions available. The litres and km functions refer to a tally of litres used and kilometres travelled. Of course the AV functions are available for km/h and l/100km functions and the 8 LED does not light. Further information about the functions available can be obtained from the article in the July 1982 issue.

When entering the litres REM, the number entered will be added to the number originally displayed. Further information on entering data to the litres REM function is available on page 64 of the September 1982 issue.

The final comments are all related to a common problem, that of incorrect resetting due to a slow starting crystal. We recommend connecting a 10MΩ resistor across the crystal and increasing the 0.1μF capacitor at pin 9 of IC5c until reliable resetting occurs. A value not larger than 0.47μF should be suitable.



BUILD IT YOURSELF ORGAN AND ELECTRONIC PIANO KITS.

Wersi organs are available in kit pack form making it possible for you to build a very advanced instrument in stages as you can afford it. Add-on kits can be fitted at a later date (sound computer — appoggio kit etc).

Want to hear what a Wersi Organ sounds like? Ring or write to us for details on demo tapes or L.P.'s by Klaus Wunderlich, which have organ settings for each track listed on the cover.

Catalogues and technical advice available from:

Robert Carr Electronics
18 Beach Parade Toukley NSW
Central Coast
Phone: (043) 96-4203



Tel. (02) 587 3491

IS THE ONLY COMPANY
WHICH MANUFACTURES AND
SELLS EVERY PCB & FRONT PANEL
published in EA and ETI
651 Forest Road Bexley 2207
AUSTRALIA

RING FOR INSTANT PRICES
24 HOUR TURNAROUND SERVICE

Sales of CMOS, TTL, LINEAR, DIGITAL ICs, etc, Transistors, LED, Zeners/Diodes, Resistors, Capacitors, etc, Coax, Audio and Hook-up Cable. CB Accessories, CB's, Antennas.

(Send for free catalogue)

SALES 7 DAYS A WEEK — FAST MAIL
ORDERS

BANKCARD WELCOME

Ross Erwin Electronics,


Tel (02) 636 3739

24 Peachtree Ave, Wentworthville 2145
(PO Box 295, Parramatta 2150)

ELECTRONICS CENTRE

BARGAIN PRICES • PERSONAL ATTENTION • SLICK MAIL ORDER SERVICE • SATISFACTION

Plessey Foster 180 watts (cont) 240W peak. Bass/lead guitar • Hifi • PA • Organ
15" speakers



Sound pressure level 101 ± 2dB
Freq response 4500Hz
Freq reson 40 ± 8Hz Voice coil
dia 80mm
Flux density 10800 gauss
Weight 8.5kg was \$125
P-P NSW \$3. SA. Q. V. T. \$6.75.
WA. NT \$9.75

16 OHMS ONLY.
VERY LAST
SPECIAL OFFER

\$99.

100 MIXED
"FRESH AS A DAISY"
ELECTROLYTICS

1uf to 2500uf. 6V to 50VDCW.
Single ended and axial leads. We
guarantee NO JUNK.

\$8.75 PP NSW \$2
INTERSTATE \$3

• AWA CARPHONE • TRANSCEIVER



76MHz. 3 CHANNEL • LOW BAND • FM •
6 - 12 VDC SOLID STATE POWER SUPPLY • (INBUILT).
22 MINI TUBES, 7 AND 9 PIN. PLUS TYPE 6146 IN FINAL •
N.B. CRYSTALS ARE NOT SUPPLIED, NOR ARE THE SETS AIR
TESTED • INTERCONNECTING CABLE AND CABINET IS
SUPPLIED • CONVERSION TO 6 METRE BAND IS EASY • DATA
AVAILABLE • WE GUARANTEE THE SETS TO BE COMPLETE AND
IN EXCELLENT CONDITION •

P-P NSW \$4.50.
V. Q. SA. T. \$7.50.
WA. NT. \$11.50.

EX AMBULANCE \$35

MINIATURE INSTRUMENT QUALITY ROTARY SWITCHES

HIGH GRADE JEAN RENAUD PRODUCT.

LOW LOSS WAFERS

25mm DIA. 6mm SHAFT. NON-SHORTING PLATED CONTACTS.

5 Position 2 Pole 2 Bank \$2.80 ea OR 5 for \$11.50

6 Position 2 Pole 1 Bank \$1.80 ea OR 5 for \$7.25

4 Position 2 Pole 1 Bank \$1.80 ea OR 5 for \$7.25

PP Each NSW \$1. Interstate \$1.50. For 5 NSW \$2. Interstate \$3

C-CORE TRANSFORMERS • LOW NOISE • HIGH
EFFICIENCY FOR THE COMPUTER • POWER SUPPLY • AND
MANY MORE PROJECTS



MODEL	SEC. V.	AMPS
JT266	0-18V	8A
JT235	26-0-26V	2A
JT248	0-10V	10A
JT249	8.5-0-8.5V & 15VCT	4A
JT274	0-9.5V	10A
	& 2X 0-12V	1A
JT320	36-0-36V	2A

ONE PRICE
\$29.95 ea

ADD P-POST: NSW \$3.50.

V. Q. SA. T. \$4.50.
WA. NT \$5.50

500 uA FSD
PANEL METERS




\$3.50
EACH
2
FOR
\$6

2 SIZES. 38 and 45mm. SQ V-U
SCALE

MEMOREX 8-TRACK
BLANK CARTRIDGE TAPE
90 MINUTES **\$4.95** P-P 90c.

PUSH BUTTON
TELEPHONE
DIALER
WITH
MEMORY



\$19.95 P-P 90c

Last phone number memory re-call.
Busy number redialled by touch of
one button. Instant cut-off button.
Converts your old fashioned
mechanical system into a modern,
speedy phone dialer. Easy to install.

S-100 Bus, Z80A™ Based System With DMA Transfer and Memory Management on an IEEE Spec 696.1/D2 Board

FEATURES:

- ☐ Single or Double Density Floppy Disk controlling up to four 8in or 5 1/4in floppy disk drives in either DMA, Interrupt or Programmed I/O mode.
- ☐ 64K bytes of onboard Dynamic RAM with Memory Deselect of 4 Kbytes to 64K bytes under software control.
- ☐ Four Channel Direct Memory Access Controller.
- ☐ Two Serial I/O channels with one channel programmable in either DMA, Interrupt or Programmed I/O mode.

- ☐ Two Parallel I/O channels with one channel programmable in either DMA, Interrupt or Programmed I/O mode.
- ☐ Memory Management of 16 Megabytes of system memory.
- ☐ Eight Vectored Priority Interrupts chained together with I/O Interrupts for use with Z80 Mode 2 Interrupts.
- ☐ Provisions for either a 2K byte or 4K byte onboard EPROM, (Monitor in a 2K byte EPROM supplied with board).
- ☐ CP/M™ and MP/M™ operating systems available, TurboDOS™ available soon.
- ☐ Turbo-Disk™ Implementation included.

ALSO:

256K byte Dynamic Memory Board, 16K increments — fully bank selectable compatible with Cromix™. CP/M2.2™, Alpha Micro and other major systems.


ABSOLUTE ELECTRONICS

483 CENTRE ROAD, BENTLEIGH, VIC 3204 Phone (03) 557 3971

WE STOCK:

74LSTTL, Capacitors, CMOS, Connectors, Diodes, Discrete Devices, Kits, LEDs, Linear Devices, OPTO-Isolators, Potentiometers, Rectifiers, Resistors, Sockets, Transformers, Z80/6800 CPU and support ICs, Zener Diodes.

EA Magazine Holders

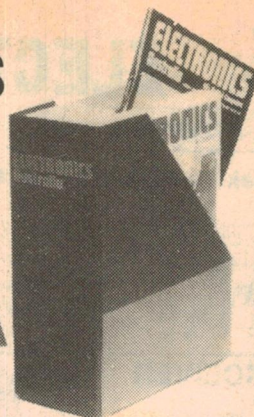

The binders and magazine holders are available over the counter from Electronics Australia, 57 Regent Street, Sydney, NSW — Price: \$5.10 binders, \$4.50 holders.

Mail orders should be sent to Electronics Australia, PO Box 163, Chippendale, NSW 2008.

Prices including postage are:

Holders: \$5.50 NSW; \$5.60 other states; or six for \$29.00 NSW; \$31.50 other states, \$A33.00 NZ.

Binders: \$7.00 NSW; \$8.50 other states; or six for \$33.00 NSW; \$36.00 other states, \$A37.00 NZ.

EA PC BOARDS AND FRONT PANELS

Some readers have problems obtaining PC boards and front panels for projects. Many of our advertisers sell these items and their advertisements should be checked in the first instance. Failing that, below is a list of firms which produce or sell PC boards and front panels.

NSW
Dick Smith Electronics,
125 York Street,
Sydney, 2000.
Telephone 290 3377.
DSE also has branches
and resellers throughout
Australia.

Electronic Agencies,
115-117 Parramatta Road,
Concord, 2137.
Telephone 745 3077.

117 York Street,
Sydney 2000.
Telephone 29 2098.

Jaycar Pty Ltd,
125 York Street,
Sydney 2000.
Telephone 264 6688.

Radio Despatch Service,
869 George Street,
Sydney 2000.
Telephone 211 0816.

RCS Radio Pty Ltd,
651 Forest Road,
Bexley, NSW 2207.
Telephone: 587 3491

VIC.
Rod Irving Electronics,
425 High Street,
Northcote, 3070.
Telephone 489 8131.

Kalextronics,
101 Burgundy Street,
Heidelberg 3084.
Telephone 743 1011.

Shop 11,
Regional Shopping Centre,
Melton 3338.
Telephone 743 1011.

Sunbury Printed Circuits,
Lot 14, Factory 3,
MacDougall Road,
Sunbury 3429.
Telephone 744 2714

WA
Altronics,
105 Stirling Street,
Perth 6000.
Telephone 328 1599.

Jemal Products,
8/120 Briggs Street,
Welshpool, 6106.

N.Z.
Marday Services,
PO Box 19 189,
Avondale, Auckland.

Mini Tech Manufacturing
Co Ltd,
PO Box 9194,
Newmarket.

Printed Circuits Limited,
PO Box 4248,
Christchurch.

ADVERTISING INDEX

ADVERTISER	PAGE
A.P. Products	36, 37
Absolute Electronics	135
Ace Radio	135
Altronic Distributors Pty Ltd	14, 15, 66, 67, 102, 103, 118
Ampec	2
Audio Engineers	60
Audiosound	115
Auditec	35
Aust Computer Society	89
Billco Electronics	75
Bright Star Crystals	12
Robert Carr	134
L. E. Chapman	132
Danish Hi-Fi	12
Dick Smith Electronics Group	4, 5, 6, 18, 24, 56, 57, 76, 77, 82, 94, 113, 120, 126
Ross Erwin Electronics	134
Edible Electronics	121
Electronic Agencies	47
Ellistronics	117
Embe Software	134
Gammatron	139
Hi Com Unitronics	90
ICS	97
Jaycar Pty Limited	20, 21, 44, 45, 63, 84, 85, 98, 110, 111
Looky Video	128
Marantz (Aust) Pty Ltd	IBC
Parameters	109
Paris Radio	125
Pioneer	OBC
R.C.S. Radio	134
Rod Irving Electronics	29, 74, 107, 122
Royston Electronics	55, 128
Sheridan Electronics	71
Sony (Aust) Pty Ltd	IFC
Stotts Technical Correspondence College	101
T.D.K.	32
Trade Television & Video Service	69
Vendale Nominees Ltd	128
Wireless Institute of Australia	112

SUBSCRIPTION SERVICE



**ELECTRONICS
Australia**

Subscription Rates

\$28.00 per year
within Australia
\$A29.50 per year
elsewhere

Make sure you receive every copy of the magazine by ordering it from your newsagent or the publisher. For publisher subscriptions post this coupon, with your remittance to Electronics Australia Subscription Dept. John Fairfax & Sons Ltd, GPO Box 506, Sydney 2001. Subscription will start with first available issue.

Name
Address
Postcode Enclosed is for years

Exclusive to Marantz. Very sophisticated. Very superior. Very expensive.



Very high fi indeed.

These Marantz Gold components represent the world's most advanced, most inspired, most stringently tested and sophisticatedly engineered audio equipment.

For the wealthy—exclusive toys.

For the connoisseur—the finest hi-fi money can buy.

The Marantz TT1000 (around \$2500), with its precision-made high density glass and golden aluminium sandwich structure, is justifiably described as one of the most beautiful turntables ever.

'Playing a series of direct-recorded discs, warped discs, discs with nasty low frequency content and discs requiring unusual track-ability performance, showed clearly that this system borders on the superlative in areas where even most good turntables only provide good to above average performance.'

'...the resonance characteristics of the TT1000 are the lowest we have yet seen from any turntable irrespective of its selling price.'

'This is top-of-the-line equipment for people who rate hi-fi as their greatest pleasure in life'.
— Louis Challis, *Electronics Today International*, April 1981.

Similarly, the Marantz SM1000 Stereo Amplifier (around \$5000) is designed to be the ultimate in luxury and performance.


When it was bench-tested by ETI Magazine in an exhaustive lab study, Louis Challis stated 'The Marantz SM1000 Amplifier has the capability to provide superlative performance at home, in a laboratory, in a studio, or in a rock band with the ease and panache of a professional.'

'The power output claims are modest for the unit is readily capable of producing 625 watts into an 8 ohm load with both channels driven...'

And when the Marantz ST8 FM/AM Tuner (around \$700) was

put through its paces so technically surprising was its performance that a second series of tests was devised to check the first results.

'As a result... the Marantz ST8... far ahead of any tuner we have ever measured and better than any tuner we have ever seen



The TT1000's adjustable, high-absorption air suspension audio insulator feet.

reviewed in any other magazine, either local or overseas.' — Paul de Noskowski, *Electronics Australia*, April 1981.

Marantz Gold. The New Audio Standard.



ST8

Detailed specifications of these exclusive Marantz Gold components are available on request by writing to:

Marantz (Australia) Pty. Limited,
19 Chard Road, Brookvale, NSW 2100
Phone (02) 939 1900 Telex AA24121
Melbourne (03) 544 2011
Brisbane (07) 44 6477
Adelaide (08) 223 2699
Perth (09) 276 3706
Townsville (077) 72 2011

marantz





BLACK POWER



Pioneer Black Avante Systems give you the very latest in sound technology. Featured here is the G9 system – SA 930 amplifier with power output of 70 watts RMS and auto input selector, plus a TX 930 tuner with 8 FM/AM pre-set station selectors, auto band search and LED frequency indicator.

A PL 930 direct drive turntable features an exclusive quartz lock indicator to give you perfect sound reproduction at all times.

The CT 930 cassette deck has 3 motors that are computer co-ordinated for superb musical accuracy. It also features auto reverse, music search and Dolby* B&C noise reduction circuitry. A pair of Pioneer 3-way speakers with maximum output of 70 watts RMS completes the system. It all adds up to maximum sound performance – that's Pioneer Black Avante power.

PIONEER®
Leads the world in sound.

Pioneer Electronics Australia P/L (Incorp. in Victoria), 178-184 Boundary Road, Braeside 3195. Telephone (03) 580 9911. Branches in all states.

Systems and product specifications subject to change without notice.
*Dolby is the registered trademark of Dolby Laboratories.